

# Model 37202-Series

## **ELECTRIC BILGE PUMPS**

### **FEATURES**

- Pumpgard Inlet Strainer Supplied With Pump
- Self-Priming
- Diaphragm Design Allows Dry Running
- Built-in Hydraulic Pulsation Dampener
- Corrosion Resistant Materials Throughout for Sea Water Service
- Meets USCG Electrical Regulation 183.410 and ISO 8846 Marine for Ignition Protection.
- N.M.M.A. Type Accepted

### **SPECIFICATIONS**

Open Flow: 4.5 GPM Vert. Dry Suction Lift: 7 feet

**Ports:** 3/4" Slip-on Hose **Weight:** 5.5 lb (2,5 kg)

## **INSTALLATION**

#### **MOUNTING**


Mount upright in a dry location (above highest bilge water level) on a solid surface. Mounting screws should be tightened only enough to slightly compress grommets. Overtightened screws will reduce cushioning effect of mounts and may cause excessive noise.

### **PLUMBING**

For intake and discharge, use 3/4" ID non-collapsible hose. Keep intake and discharge lines free of kinks and restrictions. To protect pump from debris, install the 3/4" in-line strainer (Model 36200-0000) in the intake line from the bilge. Use a 3/4" thru-hull fitting for discharge located well above the waterline at all angles of heel.

#### **WIRING**

Wire pump in a circuit independent of all other electrical fixtures. Use stranded copper wire. Install fuse in positive circuit. See table for recommended wire and fuse size. See diagram for wiring connections. Use a 10 amp-rated switch (3-way switch Model 44960-0001). After installation, it is recommended that voltage be checked at the motor terminals with motor operating under full load. Be sure measured voltage is not less than 11 volts on a 12 volt system with a fully charged battery.





### STANDARD MODELS

Model	Voltage	Nominal Current	Fuse Size
37202-0000	12 Vdc	7.5 AMP	10 AMP
37202-0010	24 Vdc	6.5 AMP	10 AMP


### **MAINTENANCE**

**LUBRICATION:** Check connecting rod bearing annually and add chassis lube as needed. No other lubrication of the pump is required.


**WINTER STORAGE:** The pump must be completely drained, hoses removed and pump run until all water is expelled.

### **WIRING TABLE**

Wire Length Between Battery and Motor	Wire Gauge
1 - 25 feet	12 AWG
25 - 50 feet	10 AWG



Model 37202-Series

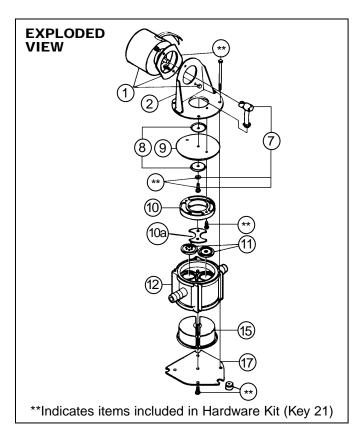

## PARTS LIST 37201/37202-SERIES

KEY	DESCRIPTION	PART NUMBER	QTY.
1	Motor Kit 12 Vdc	30201-0000	1
1	Motor Kit 24 Vdc	30200-0040	1
2	Motor Mount	35797-0000	1
7	Connecting Rod Kit	30040-0000*	1
8	Diaphragm Plate	35688-0000	2
9	Diaphragm	37174-0000*	1
10	Retainer	35788-0000	1
10a	Valve Retaining Plate	35816-0000	1
11	Valve Set (Inlet & Outlet)	30005-0000*	1 Set
12	Base	35795-0000	1
15	Pulsation Dampener	37179-0000*	1
17	Bottom Plate	35798-0000	1
21	Hardware Kit	37168-0000	1 Set
	Service Kit	37182-0000	

<sup>\*</sup> Indicates Parts Contained in Service Kit.

NOTE 1 – For Model 37201-0000 Use Replacement Motor Number 30202-0000 (12 Volt only).

NOTE 2 – For Model 37201-0000 Use 2 Each 35983-0000 Diaphragm Plates.

## Jabsco



U.S.A. Jabsco 1485 Dale Way, P.O. Box 2158 Costa Mesa, CA 92628-2158 Tel: 714.545.8251 Fax: 714.957.0609

© Copyright 2001, ITT Industries

UNITED KINGDOM Jabsco Bingley Road, Hoddesdon Hertfordsire EN11 OBU Tel: +44 (0) 1992 450145 Fax: +44 (0) 1992 467132 CANADA Fluid Products Canada 55 Royal Road Guelph, Ontario N1H 1T1 Tel: (519) 821.1900 Fax: (519) 821.2569 JAPAN NHK Jabsco Company Ltd. 3-21-10, Shin-Yokohama Kohoku-Ku, Yokohama, 222 Tel: 045.475.8906 Fax: 045.475.8908

GERMANY Jabsco GmbH Oststrasse 28 22840 Norderstedt Tel: +49-40-53 53 73 -0 Fax: +49-40-53 53 73 -11

#### **SERVICE**

#### **TROUBLE SHOOTING**

Problems

Causes

- Air leak in suction line.
- Bilge pickup not submerged.
- Intake hose kinked or plugged.
- Fouled intake or discharge valve.
- Ruptured diaphragm.

Rough or noisy operation: - Intake or discharge hose kinked

or plugged.

Pump not mounted firmly.
Loosened eccentric set screw or worn connecting rod bearing.
Ruptured or collapsed pulsation

dampener.

#### **VALVE REPLACEMENT**

- 1. Turn off power to pump. Remove four tie down bolts.
- 2. Expose valves by lifting motor mount and the attached diaphragm assembly from pump base.
- 3. Remove and clean or replace valves.
- Install valves, making sure rubber flapper is UP on intake and DOWN on discharge. Replace valve retaining plate.
- 5. Replace motor-mount-diaphragm assembly and fasten evenly to base with the four tie down bolts.

### DIAPHRAGM AND CONNECTING ROD REPLACEMENT

- 1. Turn off power to pump. Remove four motor mount tie down bolts.
- Lift motor mount and the attached diaphragm assembly from pump base.
- 3. Remove two diaphragm retainer screws and the diaphragm retainer.
- Pull connecting rod assembly and diaphragm from motor mount; then, unscrew bolt to separate diaphragm plates.
- Loosely reassemble new diaphragm, diaphragm plates, washer and diaphragm bolt onto new connecting rod assembly.
- Slide connecting rod on shaft. Ensure that eccentric is firmly seated on motor shaft and tighten set screw firmly against flat side of shaft.
- 7. Loosely reassemble diaphragm, diaphragm plates, washer and diaphragm bolt onto connecting rod. Tighten connecting rod bolt while maintaining alignment of rod bearing eccentric. NOTICE: Avoid misalignment or twisting of rod on eccentric shaft or excessive bearing wear will result.

#### **PULSATION DAMPENER REPLACEMENT**

- Disconnect power leads from pump and remove from mount. Remove four tie down bolts.
- Remove bottom plate screw and the bottom plate. Pull out and replace pulsation dampener; position the 3-ribbed cavity on discharge side.
- 3. Replace bottom plate and screw. Tighten evenly to base with the four tie down bolts.
- 4. Reinstall pump and reconnect power leads.

#### PUMPGARD REPLACEMENT PARTS

Part DescriptionPart NumberScreen Replacement36139-000O-Ring Seal36403-0000

THE PRODUCTS DESCRIBED HEREIN ARE SUBJECT TO

THE JABSCO ONE YEAR LIMITED WARRANTY. WHICH IS

AVAILABLE FOR YOUR INSPECTION UPON REQUEST.