


INSTRUCTIONS

1. Connect battery (12V only) to the terminal identified with a "+" tag.
2. Ground the terminal with a "-" tag.
3. Your switch panel is supplied with 6 fuses -6x5A.
First decide what rating of fuse should be used for each switch.
(WARNING: DO not. use fuse rated over 15A).
4. To remove the fuseholder cap, see diagram below:

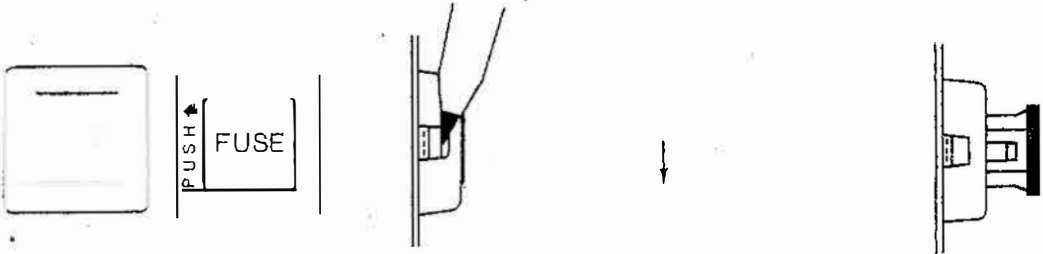

"PUSH" indicates slot in the fuseholder body.

Insert a ball pen or small screw driver in the slot. Press downward.

Cap pops out. Insert or remove fuse, then snap cap back to position.

Fuse bar is positive (+)
 Switch bar is negative (-)
 Center tap on switch goes to positive (+) on appliance
 *Make sure negative (-) of appliance is connected (-) on same ground (-) of battery.
 The negative wire (-) or ground wire (-) on the appliance must be connected to a common negative ground (-) on the instrument panel.
 Example-negative terminal ammeter.

