## **SNAPP™** Fuel Filter Fittings

SAE J2044 Quick Connect Fittings For Mobile and Marine SNAPP Fuel Filters



# 2 Pack Quick-Connect Fittings Kit

SNAPP 90° and straight fittings are now available with hose barbs for both 3/8" & 5/16" ID hose.

Installing one or both 90° quick connectors will reduce overall package space required and provide flexibility when connecting to existing fuel lines.

No tools are required to remove the quick connect fittings, which makes servicing the element quick and easy.





#### **Contact Information**

Parker Hannifin Corporation **Racor Division** P.O. Box 3208 3400 Finch Road Modesto, CA 95353

phone 800 344 3286 209 521 7860 fax 209 529 3278 racor@parker.com

www.parker.com/racor




| Part<br>Number | Description                                      | End<br>Form       | Hose<br>Barb | Hose<br>ID | # of<br>Units |
|----------------|--|-------------------|--------------|------------|---------------|
| RK23319        | 90° Quick-Connect Fitting Kit,<br>3/8" x 3/8"    | 3/8"<br>SAE J2044 | 3/8"         | 3/8"       | 2             |
| RK23320        | Straight Quick-Connect Fitting Kit, 3/8" x 5/16" | 3/8"<br>SAE J2044 | 5/16"        | 5/16"      | 2             |
| RK23321        | 90° Quick-Connect Fitting Kit,<br>3/8" x 5/16"   | 3/8"<br>SAE J2044 | 5/16"        | 5/16"      | 2             |

| Product Information   |   |  |
|-----------------------|---|--|
| Construction          | Lightweight, durable, high temperature composite body with additional retaining lock. |  |
| <b>Rated Pressure</b> | 50 PSI (3.5 bar)  |  |
| Temperature<br>Range  | -20° to 150°F (-29° to 66°C)  |  |
| Industry<br>Standard  | SAE J2044   |  |

#### **Space Saving Dimensions**

The quick-connect 90° fittings offer up to 1.4" of clearance and are adjustable to fuel line needs.

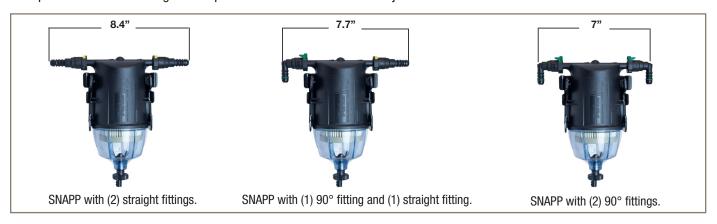

#### **Installation Instructions**

**To Install:** Push connector onto the fuel port. The connector will click when engaged. Press in the lock. The lock will click when engaged.











To Un-install: Pull out lock. Press green retainer in. Pull fitting out.











### **Adjustable Fitting Position**



© 2015 Parker Hannifin Corporation. Product names are trademarks or registered trademarks of their respective companies.

RSL0199 Rev - 2/15



▲ WARNING: The products described in this literature can expose you to chemicals including Diisononyl phthalate, Carbon black extract, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

ENGINEERING YOUR SUCCESS.