

## **GP-3020 Series Oil Change System**

**Marine Manual** 

Reverso has been the premier maker of oil change systems for over 20 years. Installed as standard equipment by a majority of boat builders

- Compact
- Reversible (Draws and fills engines)
- Self-priming

Simplifies oil changes, Reduces chances of oil spills Valve options from 3 - 4 - 5

## **Technical Specification**

Pump Port	1/2" Flare
Manifold Ports	1/2" NPT full flow valve
Flow Rate	3 GPM / 11.35 LPM
Self priming	5 feet (wet gears)
Lift	25 feet
Pump body	Brass
Gears	Bronze
Shaft	Stainless Steel
Seal	Flouroelastomer lip seal
Motor	DC 12/24v


<b>Pressure PSI</b>	12v Flow	24v Flow	12 v Amp.	24 v Amp.
0.2	3.0	3.3	6.7	3.7
10	2.6	3.1	7.3	4.4
15	2.5	3.1	8	4.9
20	2.3	2.9	8.8	5.3
25	2.0	2.7	9.6	<b>5.</b> 7
30	1.7	2.6	10.7	5.9
35		2.2		6.4
40		2.1		6.8


Model	Α	В	C	WEIGHT
GP-3023	11.500"	9.50"	4.5"	13 lbs/5.90 kg
GP-3024	14.250"	9.50"	4.5"	14 lbs/6.35 kg
GP-3025	14.250"	9.50"	4.5"	15 lbs/6.38 kg

## **Ordering Specifications**

	GP 302_	12/24
Model ———		
Pump		
# of valves—		
Voltage		



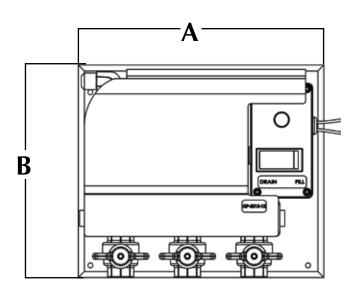

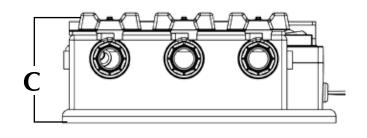

Drawing dimensions In INCHES for reference only Technical drawings available upon request