



44 YEARS

2014 RIBs

AB INFLATABLES

NAUTILUS
DLX

OCEANUS
VST

MARES
VSX

NAVIGO
VS

VENTUS
VL

ALUMINA
ALX

LAMMINA
AL

LAMMINA
UL

AB RIDER

CONTENTS

NAUTILUS 04

OCEANUS 08

MARES 12

NAVIGO 14


VENTUS 18

ALUMINA 20

LAMMINA 24

LAMMINA UL 28

AB RIDER 30

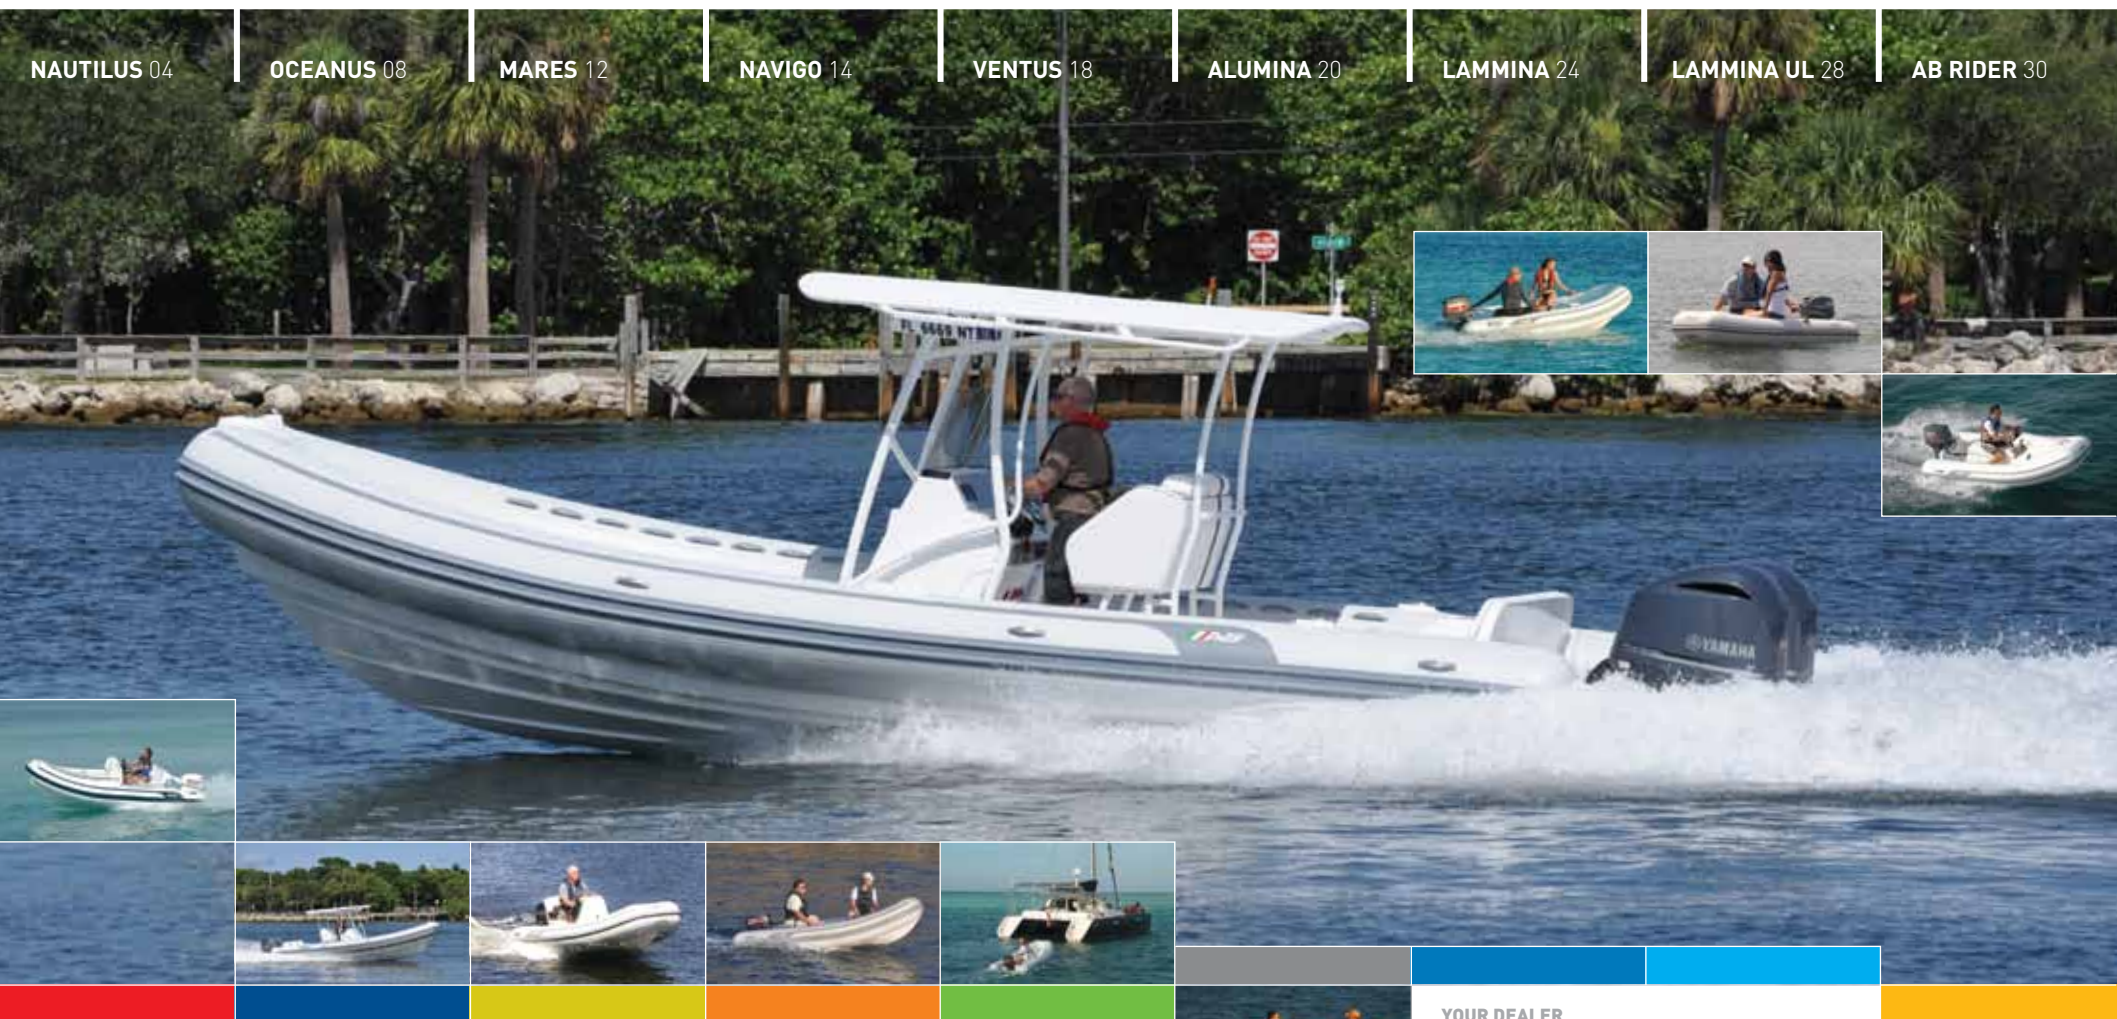

COLOMBIA - HEADQUARTERS MAILING ADDRESS

AB MARINE GROUP
CALLE 1E No. 2-15, BODEGA No. 9
ZONA FRANCA DE BARRANQUILLA
BARRANQUILLA, ATLANTICO
PHONE: +57 (5) 379.5132
FAX: +57 (5) 379.5667
INFO@ABINFLATABLES.COM



EVERY AB INFLATABLE BOAT IS
BACKED BY A TEN-YEAR LIMITED WARRANTY.
SEE YOUR DEALER FOR DETAILS.

YOUR DEALER

AB Inflatables, a division of AB Marine Group, is world renowned as the premier designer and manufacturer of inflatable boats for both the leisure and professional markets. AB Inflatables has a long established reputation for innovative design, superior construction, and outstanding customer satisfaction.

Our boats have earned their status as the world's finest inflatables. AB is one of only a few RIB manufacturers to have CE, NMMA as well as ISO 9001 certification. At AB, we insist on an unwavering attention to detail. We travel the world to procure the finest materials available. We painstakingly hand-craft each boat, to ensure that even the smallest details are considered. The result is a full line of inflatable boats, designed and built to provide our customers with the exceptional quality they deserve, and have come to expect from AB.

We are committed to meeting the ever changing needs of our customers. It is this commitment that drives our desire for constant innovation. AB Inflatables has never shied away from the hard work of refining our existing models, designing new inflatables, or retooling our workshop to ensure that AB boats are truly the most celebrated watercraft on the market.

This un-equalled pursuit of perfection has long distinguished AB from the competition. With four decades of proven expertise, AB Inflatables has earned its reputation for excellence. Our unparalleled craftsmanship, relentless innovation, and commitment to customer service have made the entire AB line the most prestigious and sought after inflatables on the market. Contact one of our dealers today to discover for yourself why AB Inflatables are the choice of discriminating boaters worldwide.



YEARS OF INNOVATION AND CRAFTSMANSHIP




QUALITY

why ab?

At AB, we are obsessed with quality. We can't imagine doing business any other way. That is why we refuse to settle for average or substandard materials, or to sacrifice hand-craftsmanship for the speed of mechanized assembly lines. We believe that exceptional quality can only be achieved by combining the finest materials with an unflagging attention to detail. When you buy an AB Inflatable, you can rest assured that you are buying a watercraft that is unrivaled in the industry.

CONSTRUCTION OF ORCA (CSM) COATED FABRIC

- A. EXTERNAL (CSM) LAYER:**
 - WEATHER RESISTANCE (FADING AND AGEING)
 - CHEMICAL RESISTANCE
 - ABRASION RESISTANCE
- B. LAYER OF NEOPRENE IN BETWEEN THE (CSM) AND THE TEXTILE**
- C. HIGH TENSILE TEXTILE:**
 - BASIC MECHANICAL PROPERTIES (TENSILE STRENGTH AND TEAR RESISTANCE)
 - DIMENSIONAL STABILITY (NO DISTORTION)
- D. INTERIOR NEOPRENE SHEETS GIVE:**
 - AIR-TIGHTNESS (NO AIR PASSES THROUGH TO THE TEXTILE)
 - EXCELLENT ADHESION TO THE TEXTILE AND TO OTHER RUBBERS

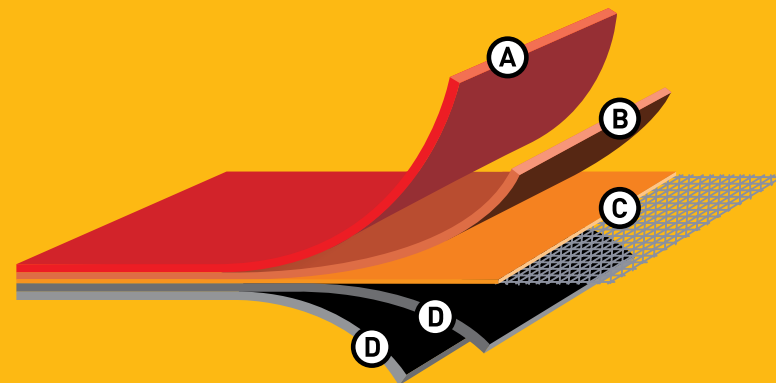

MORE THAN A TENDER...

There are countless reasons for choosing an AB Inflatables as your tender, but there are just as many reasons for choosing an AB Inflatable as your primary boat.

1

THE LIGHTWEIGHT PROPERTIES OF AN AB INFLATABLE MAKE IT EASIER TO MANEUVER WHILE DOCKING AND UNDERWAY.

2

AB INFLATABLES ARE EXTREMELY FUEL EFFICIENT AND OFFER TREMENDOUS SAVINGS AT THE FUEL DOCK OVER TRADITIONAL FIBERGLASS BOATS.

3

MOST MODELS CAN BE TOWED BY NEARLY ANY FOUR CYLINDER VEHICLE SAVING YOU THE FUEL COSTS AND EXPENSE ASSOCIATED WITH THE LARGER TOW VEHICLES REQUIRED FOR TRADITIONAL BOATS.

4

AB'S LARGE ORCA (CSM) TUBES AND INNOVATIVE FORWARD HULL DESIGN PROVIDE FOR A MUCH DRIER AND SMOOTHER RIDE THAN TRADITIONAL BOATS.



TUBES

AB inflatable tubes are unequalled in the industry. They are constructed from a 5-ply Orca Chlorosulfonated Polyethylene (CSM) coated fabric that is specifically manufactured to resist scratches and UV damage, while retaining its remarkable durability. This fabric is so superior we guarantee it with a ten year limited warranty, the longest available in the industry. Our seams are overlapped a full inch and reinforced by taping on the inside. Our rounded tube ends require meticulous craftsmanship, and are costly to produce, but they allow for extension of the rub rail around the tube to protect the stern, and their graceful lines are unmatched by our competitors. AB inflatable tubes boast a larger diameter that improves safety and seaworthiness, increases payload capabilities, and helps to ensure a dry and comfortable ride. Every AB tube, except the 8 & 9UL, features a minimum of three air chambers. They are divided by a special baffle system that equalizes the pressure in all chambers. This results in an additional measure of safety.

In addition, each AB model has tubes that are individually proportioned to compliment the hull dimensions. This precision design and craftsmanship means AB customers will always enjoy the greatest possible function and comfort available.

HULLS

All AB hulls are constructed from either double-molded, hand-laid fiberglass, or high quality, marine-grade aluminum. Our unique forward hull design extends the hull further forward and increases the length of the keel, as well as the interior space. The elegant lines produced by this design are characteristic of all AB boats, but the true genius is in the engineering. Our forward hull design creates a raised bow and deep "V" hull which enhance the performance of every AB model by allowing them to plane more easily with less horsepower, and cut through wakes and chop, virtually eliminating spray, for a smoother, more stable, and drier ride. Inside the boat, this design extends our floors forward and creates a wider and longer bow. The result is a roomier, more comfortable craft with plenty of storage for gear and provisions. AB hulls cost more to build, but we think you'll agree that the increased performance and comfort they provide are well worth it.

WARRANTY

EVERY AB INFLATABLE BOAT IS BACKED BY A TEN-YEAR LIMITED WARRANTY. SEE YOUR DEALER FOR DETAILS.



5

AB INFLATABLES OFFER MORE STABILITY, LOAD CAPACITY AND COMFORT THAN MUCH LARGER AND HEAVIER TRADITIONAL BOATS.

6

AB'S STURDY TUBES ARE LESS PRONE TO DAMAGE THAN TRADITIONAL FIBERGLASS BOATS WHEN MAKING CONTACT WITH DOCKS OR OTHER BOATS.

7

THE DESIGN AND LIGHTWEIGHT OF AN AB INFLATABLE MAKES IT EASIER TO LOAD AND UNLOAD FROM YOUR TRAILER.

8

AB BOATS ARE MORE LIKELY TO FIT IN A STANDARD GARAGE SAVING DOCK FEES AND MAINTENANCE.

9

AB INFLATABLES ACHIEVE SUPERIOR PERFORMANCE AND SPEEDS WITH FAR LESS HORSEPOWER THAN TRADITIONAL BOATS.

10

AB BOATS ARE DESIGNED TO GET ON PLANE FASTER AND ARE ABLE TO STAY ON PLANE AT LOWER SPEEDS MAKING THEM IDEAL FOR TOWING SKIERS AND TUBES.

nautilus

DLX

Beautifully crafted with elegant lines and painstaking attention to detail, the Nautilus series is our premier line of luxury tenders. The Nautilus line was created with the discerning yachtsman in mind. Its superior design is a reflection of the exceptional performance, comfort, and style sought by our most demanding customers. Each Nautilus model is meticulously hand crafted using only the finest materials, and richly appointed with an impressive array of amenities.

The Nautilus series offers outstanding maneuverability, making these boats a pleasure to pilot whether in open water or high-traffic harbors. Nautilus models are the tenders of choice for yacht owners and captains who will accept only the best.

A DREAM TO PILOT, UNPARALLELED STYLE



12 DLX



19 DLX I/O WIDEBODY BOWRIDER
AVAILABLE IN GAS OR DIESEL I/O AND GAS JET



EVERY AB INFLATABLE BOAT IS
BACKED BY A TEN-YEAR LIMITED WARRANTY.
SEE YOUR DEALER FOR DETAILS.

Prestigious yacht tender
Full featured and well appointed
Comfortable, built-in, upholstered seating
Graceful lines and elegant styling
Built-in coolers and ample storage
Built-in marine grade aluminum fuel tank




11 DLX



15 DLX

Luxury Console Tenders

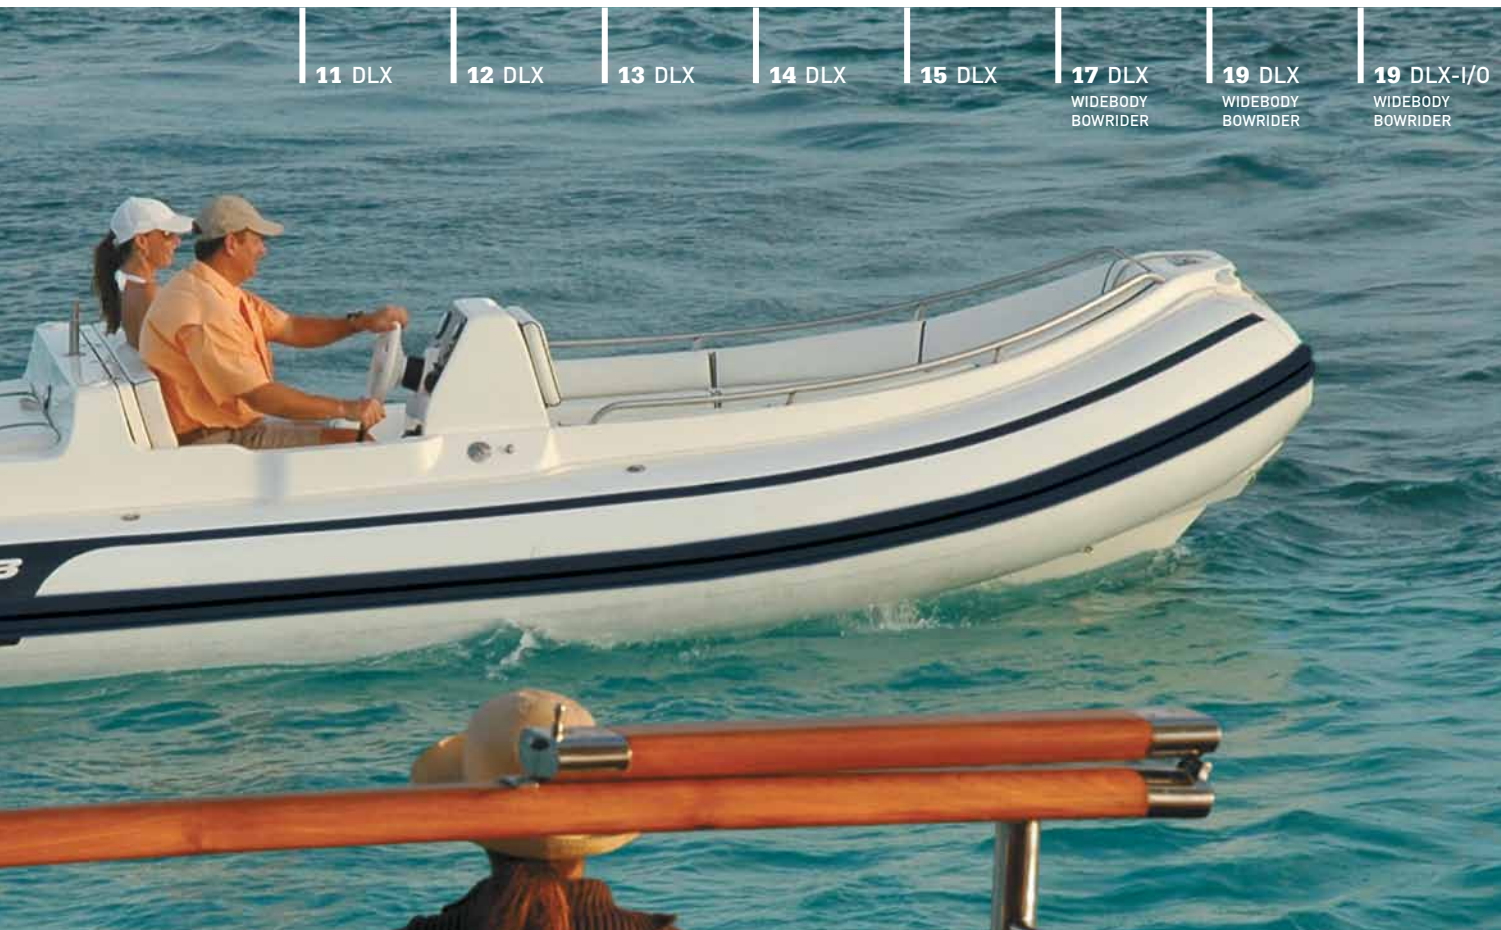

11 DLX

12 DLX

13 DLX

14 DLX

15 DLX

17 DLX
WIDEBODY
BOWRIDER

19 DLX
WIDEBODY
BOWRIDER

19 DLX-I/O
WIDEBODY
BOWRIDER



17 DLX

STANDARD FEATURES








- STAINLESS STEEL BOW EYE
- BOW STEP
- INTEGRATED STAINLESS STEEL BOW RAILS
- BOW LOCKER WITH CUSHIONED SEATING
- CLOSED CELL FOAM UPHOLSTERY
- UNDER SEAT STORAGE COMPARTMENTS
- BUILT-IN COOLER WITH DRAIN
- 3 STAINLESS STEEL FOLD DOWN CLEATS
- 3 STAINLESS STEEL DAVIT LIFTING POINTS
- INTEGRATED FIBERGLASS CONSOLE
- INTEGRATED FUEL TANK
- FRESH WATER SYSTEM (MODELS 14, 15, 17 & 19)
- MAINTENANCE KIT
- DOUBLE RUB RAIL
- SUNBATHING BED (MODELS 17 & 19)
- STAINLESS STEEL TIE DOWN EYES
- STANDARD RIGGING
- STAINLESS STEEL TOW RINGS
- 3 LAYER REINFORCED SEAMS
- ORCA (CSM) FABRIC
- HAND PUMP
- OWNER'S MANUAL

OPTIONAL FEATURES

- LIGHT ARCH
- BIMINI TOP
- TEAK FLOOR
- COMPASS
- STEREO SYSTEM
- VHF RADIO
- GPS
- ROD HOLDERS
- STAINLESS STEEL SKI TOW (13 TO 19)
- COVER
- TRANSOM LADDER
- CHOCK SET
- CONSOLE COVER
- LIFTING HARNESS

FOR FULL FEATURE LIST
VISIT OUR WEBSITE
WWW.ABINFATABLES.COM

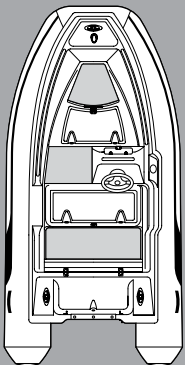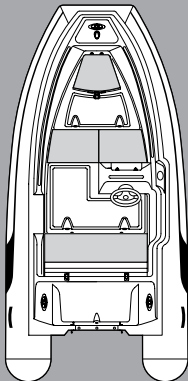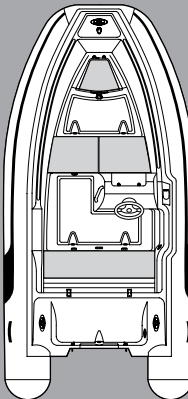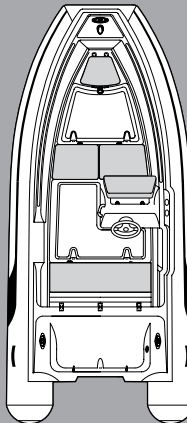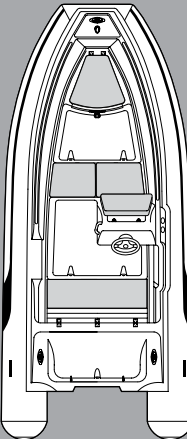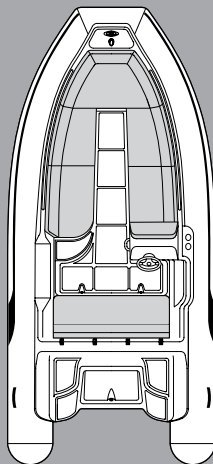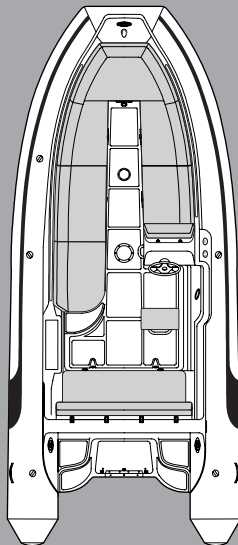

| nautilus | | 11 DLX | | 12 DLX | | 13 DLX | | 14 DLX | | 15 DLX | | 17 DLX | | 19 DLX | |
|-----------------|----------------|--|----------------|---|----------------|---|-----------------|--|----------------|---|-----------------|--|-----------------|--|--|
| | |  | |  | |  | |  | |  | | WIDEBODY BOWRIDER  | | WIDEBODY BOWRIDER  | |
| Overall Length | 11' / 3.35m | Overall Length | 12' / 3.66m | Overall Length | 13' / 3.96m | Overall Length | 14' / 4.27m | Overall Length | 15' / 4.57m | Overall Length | 17' / 5.18m | Overall Length | 19' / 5.79m | | |
| Overall Beam | 5' 10" / 1.78m | Overall Beam | 6' / 1.82m | Overall Beam | 6' 5" / 1.95m | Overall Beam | 6' 6" / 1.98m | Overall Beam | 6' 9" / 2.05m | Overall Beam | 8' 1" / 2.46m | Overall Beam | 8' 4" / 2.54m | | |
| Inside Length | 8' / 2.44m | Inside Length | 9' 2" / 2.79m | Inside Length | 9' 9" / 2.97m | Inside Length | 10' 10" / 3.30m | Inside Length | 11' 6" / 3.50m | Inside Length | 13' 1" / 4.00m | Inside Length | 15' 4" / 4.67 | | |
| Inside Beam | 2' 7" / 0.79m | Inside Beam | 2' 10" / 0.86m | Inside Beam | 3' 1" / 0.94m | Inside Beam | 3' 1" / 0.94m | Inside Beam | 3' 2" / 0.97m | Inside Beam | 4' 5" / 1.35m | Inside Beam | 4' 5" / 1.35m | | |
| Tube Diameter | 17" / 0.43m | Tube Diameter | 18" / 0.46m | Tube Diameter | 18" / 0.46m | Tube Diameter | 19" / 0.48m | Tube Diameter | 19" / 0.48m | Tube Diameter | 20" / 0.51m | Tube Diameter | 22" / 0.56m | | |
| Person Capacity | 4 | Person Capacity | 5 | Person Capacity | 5 | Person Capacity | 6 | Person Capacity | 6 | Person Capacity | 10 | Person Capacity | 10 | | |
| Weight | 440lbs / 200kg | Weight | 515lbs / 234kg | Weight | 579lbs / 263kg | Weight | 711lbs / 323kg | Weight | 739lbs / 336kg | Weight | 1181lbs / 537kg | Weight | 1639lbs / 745kg | | |
| Recommended HP | 30 | Recommended HP | 30 | Recommended HP | 40 | Recommended HP | 50 | Recommended HP | 60 | Recommended HP | 90 | Recommended HP | 115 | | |
| Maximum HP | 40 | Maximum HP | 40 | Maximum HP | 60 | Maximum HP | 70 | Maximum HP | 75 | Maximum HP | 115 | Maximum HP | 150 | | |
| Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 25" / 63,5cm | | |

PICTURE A
THE BOW AREA ON NAUTILUS
17 AND 19 MODELS
CAN BE CONVERTED INTO A
SUNBATHING BED

PICTURE B
ALL NAUTILUS BOATS FEATURE
BUILT-IN COOLERS

PICTURE C
ALL AB CONSOLES INCLUDE
HATCHES FOR EASY ACCESS TO
ELECTRONICS AND GAUGES

PICTURE D
NAUTILUS MODELS OFFER
AMPLE STORAGE BENEATH THE
STERN SEAT






17 DLX BOWRIDER



14 DLX

19 DLX-I/O*


WIDEBODY BOWRIDER

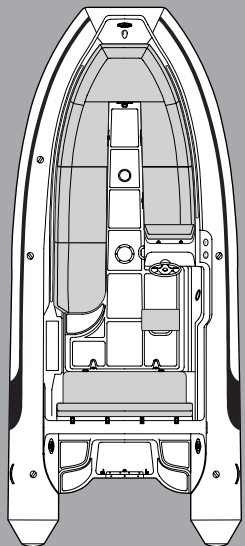

| | |
|-----------------|-----------------|
| Overall Length | 19' / 5.79m |
| Overall Beam | 8' 4" / 2.54m |
| Inside Length | 15' 4" / 4.67 |
| Inside Beam | 4' 5" / 1.35m |
| Tube Diameter | 22" / 0.56m |
| Person Capacity | 10 |
| Weight | 1551lbs / 705kg |
| Recommended HP | 150 |
| Maximum HP | 220 |
| Shaft Length | |



13 DLX

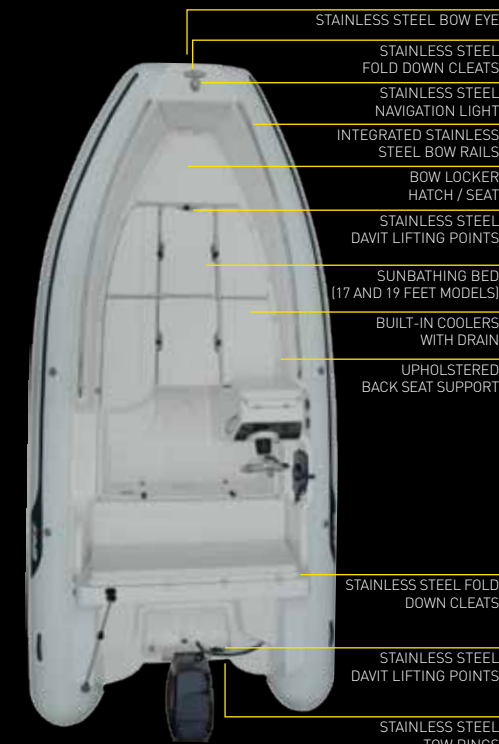

nautilus 17 DLX
MAIN FEATURES



19 DLX
(* AVAILABLE IN GAS OR DIESEL
I/O AND GAS JET





oceanus

VST

Our Oceanus line of console tenders was designed for professionals and cruisers who depend on serious performance and comfort. These boats feature AB's unique forward-hull design, making them the most spacious console tenders on the market. The extra-deep V-hull and innovative tube design allows the Oceanus to cut through the water with unsurpassed grace, virtually eliminating unwanted spray, for a truly exhilarating cruising experience.

Oceanus boats feature comfortable, upholstered seating, smartly designed consoles, and ample storage lockers that keep gear dry and safe. Boaters looking for an extremely seaworthy, high-performance, rigid inflatable will be pleased to know that several Oceanus models were originally designed for the Italian Coast Guard. With its spacious interior, impressive maneuverability, and sporty design, it's easy to understand why Oceanus boats are the first choice of so many sport's enthusiasts, yacht clubs and professional organizations around the globe.

UNSURPASSED PERFORMANCE & VERSATILITY



- Fiberglass sport console rib**
- Open and spacious design**
- Stylish consoles with windshields and rails**
- Four davit lifting points**
- Cushioned bow locker**
- Ideal for diving and fishing**
- Large capacity for crew & equipment**
- Primary boat or yacht tender**
- Built-in marine grade aluminum fuel tank**



28 VST



11 VST

Fiberglass Console Tenders



11 VST

12 VST

13 VST


14 VST

15 VST

19 VST

24 VST
BOWRIDER

28 VST

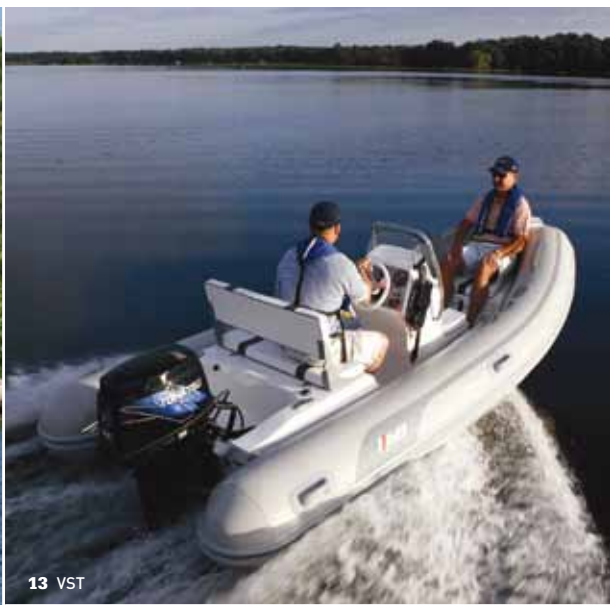

13 VST



EVERY AB INFLATABLE BOAT IS
BACKED BY A TEN-YEAR LIMITED WARRANTY.
SEE YOUR DEALER FOR DETAILS.

STANDARD FEATURES








- STAINLESS STEEL BOW EYE
- BOW STEP
- STAINLESS STEEL GRAB HANDLES ON TUBES
- BOW RAILS
- BOW LOCKER WITH CUSHIONED SEATING
- BOW HATCH CUSHION
- CLOSED CELL FOAM UPHOLSTERY
- UNDER SEAT STORAGE COMPARTMENTS
- 3 STAINLESS STEEL FOLD DOWN CLEATS
- 4 STAINLESS STEEL DAVIT LIFTING POINTS
- FIBERGLASS CONSOLE
- LEANING BOLSTER [19, 24 & 28]
- INTEGRATED FUEL TANK
- FRESH WATER SYSTEM [MODELS 19, 24 & 28]
- MAINTENANCE KIT
- DOUBLE RUB RAIL
- STANDARD RIGGING
- STAINLESS STEEL TOW RINGS
- 3 LAYER REINFORCED SEAMS
- ORCA (CSM) FABRIC
- HAND PUMP
- OWNER'S MANUAL

OPTIONAL FEATURES

- LIGHT ARCH
- BIMINI TOP
- T-TOP [MODEL 19, 24 & 28]
- TEAK FLOOR
- COMPASS
- STEREO SYSTEM
- VHF RADIO
- GPS
- ROD HOLDERS
- STAINLESS STEEL SKI TOW [14 TO 28]
- COVER
- TRANSOM LADDER
- CHOCK SET
- CONSOLE COVER
- LIFTING HARNESS (EXCEPT 28)
- CONSOLE WITH LATERAL SEAT

FOR FULL FEATURE LIST
VISIT OUR WEBSITE
WWW.ABINFLATABLES.COM

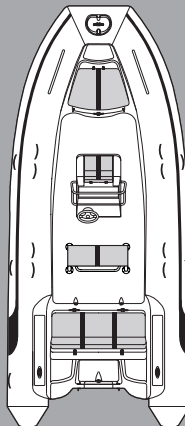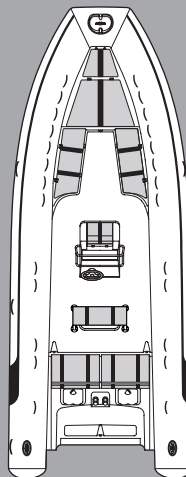

| oceanus | | 11 VST | 12 VST | 13 VST | 14 VST | 15 VST | 19 VST | 24 VST | | | | | |
|-----------------|----------------|--|---|---|--|---|---|---|----------------|-----------------|-----------------|-----------------|------------------|
| | |  |  |  |  |  |  | <div>BOWRIDER</div>  | | | | | |
| Overall Length | 11' / 3,35m | Overall Length | 12' / 3,66m | Overall Length | 13' / 3,96m | Overall Length | 14' / 4,27m | Overall Length | 15' / 4,57m | Overall Length | 19' / 5,79m | Overall Length | 24' / 7,31m |
| Overall Beam | 5' 8" / 1,76m | Overall Beam | 6' 1" / 1,86m | Overall Beam | 6' 4" / 1,93m | Overall Beam | 6' 5" / 1,96m | Overall Beam | 6' 6" / 1,99m | Overall Beam | 8' 4" / 2,53m | Overall Beam | 9' 3" / 2,82m |
| Inside Length | 8' 1" / 2,47m | Inside Length | 9' 2" / 2,79m | Inside Length | 9' 9" / 2,97m | Inside Length | 10' 10" / 3,30m | Inside Length | 11' 6" / 3,50m | Inside Length | 14' 11" / 4,55m | Inside Length | 19' 3" / 5,87m |
| Inside Beam | 2' 9" / 0,84m | Inside Beam | 2' 10" / 0,86m | Inside Beam | 3' 1" / 0,94m | Inside Beam | 3' 1" / 0,94m | Inside Beam | 3' 2" / 0,97m | Inside Beam | 4' 4" / 1,32m | Inside Beam | 5' 4" / 1,64m |
| Tube Diameter | 17" / 0,43m | Tube Diameter | 18" / 0,46m | Tube Diameter | 18" / 0,46m | Tube Diameter | 19" / 0,48m | Tube Diameter | 19" / 0,48m | Tube Diameter | 22" / 0,56m | Tube Diameter | 24" / 0,61m |
| Person Capacity | 5 | Person Capacity | 6 | Person Capacity | 7 | Person Capacity | 8 | Person Capacity | 9 | Person Capacity | 15 | Person Capacity | 20 |
| Weight | 370lbs / 168kg | Weight | 427lbs / 194kg | Weight | 477lbs / 217kg | Weight | 510lbs / 232kg | Weight | 605lbs / 275kg | Weight | 1252lbs / 569kg | Weight | 2213lbs / 1006kg |
| Recommended HP | 30 | Recommended HP | 30 | Recommended HP | 40 | Recommended HP | 50 | Recommended HP | 60 | Recommended HP | 115 | Recommended HP | 150 |
| Maximum HP | 40 | Maximum HP | 40 | Maximum HP | 60 | Maximum HP | 70 | Maximum HP | 75 | Maximum HP | 150 | Maximum HP | 250 |
| Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 25" / 63,5cm | Shaft Length | 25" / 63,5cm |

PICTURE A
THE OCEANUS LINE FEATURES
BOW RAILS DESIGNED FOR EASY,
UNOBSTRUCTED BOARDING,
AND COME STANDARD WITH FOUR
DAVIT LIFTING POINTS

PICTURE B
FOLD DOWN CLEATS AT THE
BOW AND STERN OFFER
SECURING POINTS WITHOUT
GETTING IN THE WAY

PICTURE C
ALL AB CONSOLES INCLUDE
HATCHES FOR EASY ACCESS TO
ELECTRONICS AND GAUGES







13 VST

28 VST

24 VST

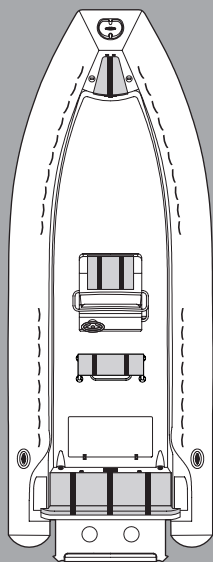

| | |
|-----------------|------------------|
| Overall Length | 27'4" / 8,33m |
| Overall Beam | 10' 1" / 3,07m |
| Inside Length | 22' 11" / 6,99m |
| Inside Beam | 6' 4" / 1,93m |
| Tube Diameter | 24" / 0,61m |
| Person Capacity | 25 |
| Weight | 2853lbs / 1297kg |
| Recommended HP | 250 |
| Maximum HP | 450 |
| Shaft Length | 30" / 76,2cm |

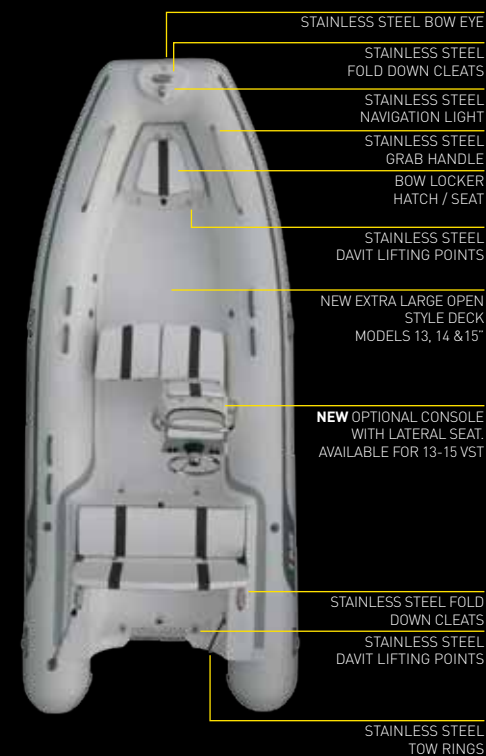

oceanus 15 VST
MAIN FEATURES



13 VST



mares

Lightweight Fiberglass Console

The VSX is the newest line in the AB Inflatables' fleet! We rewrote the book on light weight economy console tenders with this one. Based on the roomy open Navigo VS tenders, with the driest ride in the industry, we have added molded in cushioned seating for 4 adults on the 10 VSX and 5 on the 12 VSX. This feature packed boat includes all the necessary equipment.

Features include ORCA® CSM fabric, LED navigation lights, bilge pump, stainless steel steering wheel and grab handle, concealed stowage in bow locker, center console and flip open rear seat. Four stainless steel davit lifting points complete this versatile package.

COMPACT, LIGHTWEIGHT & PRACTICAL



Fiberglass Sport Console Rib
Ideal as a Yacht Tender
Light weight yet rugged construction
Cushioned Bow Locker
Four Davit Lifting points
Ample Storage


| STANDARD FEATURES |
|--|
| STAINLESS STEEL BOW EYE |
| BOW LOCKER SEAT & CUSHION |
| INTEGRATED FIBERGLASS CONSOLE |
| CLOSED CELL FOAM UPHOLSTERY |
| UNDER SEAT STORAGE COMPARTMENTS |
| 4 STAINLESS STEEL DAVIT LIFTING POINTS |
| SINGLE RUB RAIL |
| STANDARD RIGGING |
| STAINLESS STEEL TOW RINGS |
| ORCA (CSM) FABRIC HANDLES ON TUBES |
| 3 LAYER REINFORCED SEAMS |
| ORCA (CSM) FABRIC |
| HAND PUMP |
| MAINTENANCE KIT |
| OWNER'S MANUAL |



Tenders




mares 10 VSX

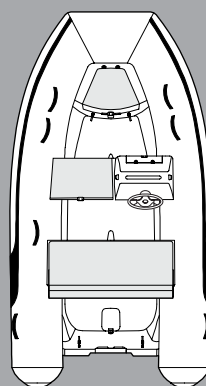


| | |
|-----------------|----------------|
| Overall Length | 10' 6" / 3,19m |
| Overall Beam | 5' 7" / 1,72m |
| Inside Length | 7' 7" / 2,31m |
| Inside Beam | 2' 8" / 0,81m |
| Tube Diameter | 17" / 0,43m |
| Person Capacity | 4 |
| Weight | 262lbs / 119kg |
| Recommended HP | 25 |
| Maximum HP | 30 |
| Shaft Length | 15" / 38,1cm |

mares 12 VSX

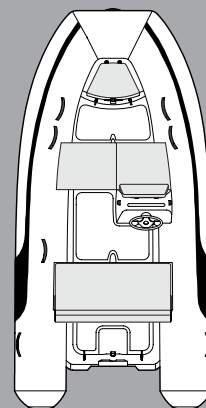

| | |
|-----------------|----------------|
| Overall Length | 12' / 3,66m |
| Overall Beam | 6' / 1,82m |
| Inside Length | 8' 9" / 2,67m |
| Inside Beam | 2' 9" / 0,84m |
| Tube Diameter | 18" / 0,46m |
| Person Capacity | 5 |
| Weight | 337lbs / 153kg |
| Recommended HP | 25 |
| Maximum HP | 30 |
| Shaft Length | 20" / 50,8cm |

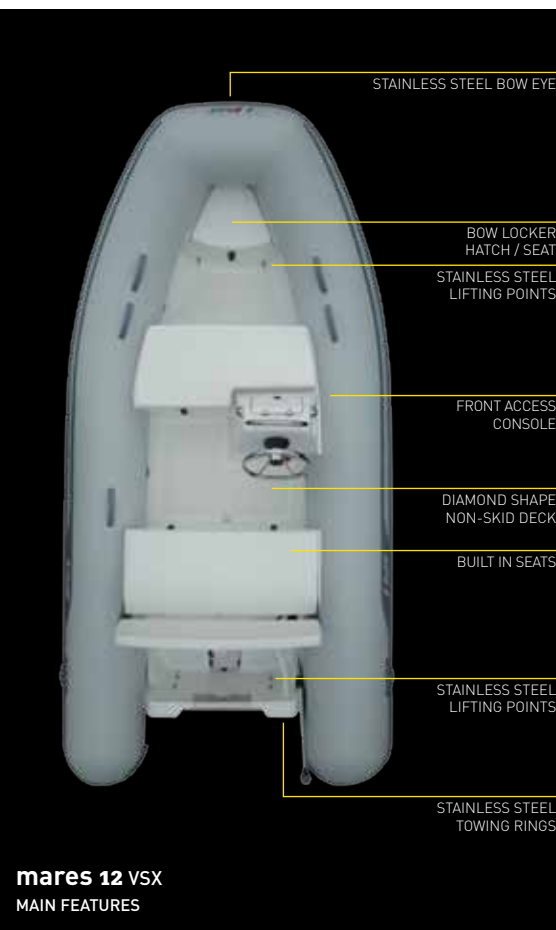

mares 12 VSX
MAIN FEATURES

OPTIONAL FEATURES

- TUBE CHAPS
- COVER
- CHOCK SET
- BIMINI TOP
- LIFTING HARNESS
- STEREO SYSTEM
- COMPASS
- GPS
- VHF RADIO

FOR FULL FEATURE LIST
VISIT OUR WEBSITE
WWW.ABINFLATABLES.COM



EVERY AB INFLATABLE
BOAT IS BACKED BY
A TEN-YEAR LIMITED
WARRANTY. SEE YOUR
DEALER FOR DETAILS.

PICTURE A
MARES MODELS OFFER
AMPLE STORAGE BENEATH
THE STERN SEAT.





navigo

| VS

The Navigo series is our premier line of open tenders. Hand crafted with careful consideration to every detail, these boats are designed for maximum performance, comfort, and durability.

The Navigo series features AB's unique forward-hull design, making them the most spacious tenders on the market. In addition, all Navigo models are equipped with all the amenities sought by serious boaters, including: a large bow locker with seating, diamond pattern non-skid fiberglass deck, a double rub rail, four davit lifting rings, heavy-duty rubber carry handles, and much more. The raised bow and large-diameter tubes provide for the driest and most comfortable ride of any open tender on the market. The Navigo line will impress even the most discriminating boater.

THE ROOMIEST ON THE MARKET



EVERY AB INFLATABLE BOAT IS
BACKED BY A TEN-YEAR LIMITED WARRANTY.
SEE YOUR DEALER FOR DETAILS.

Full featured open tender
Attractive non-skid diamond pattern floor
Four davit lifting points
Large bow locker with seating
Double fiberglass hull
Double rub rail



Open Fiberglass Tenders



STANDARD FEATURES







- STAINLESS STEEL BOW EYE
- BOW LOCKER SEAT
- 4 STAINLESS STEEL DAVIT LIFTING POINTS
- ROWING SEAT
- OARLOCK BASE WITH OARLOCKS (EXCEPT MODELS 12, 13 & 14)
- ORCA (CSM) FABRIC HANDLES ON TUBES
- ORCA (CSM) FABRIC
- ADDITIONAL AIR RETAINING CHAMBER UNDER THE FLOOR
- DOUBLE RUB RAIL
- STAINLESS STEEL TOW RINGS
- 3 LAYER REINFORCED SEAMS
- HAND PUMP
- MAINTENANCE KIT
- OWNER'S MANUAL

OPTIONAL FEATURES

- BOW STEP WITH FOLD DOWN CLEAT
- FIBERGLASS CONSOLE
- FIBERGLASS CONSOLE WITH FORWARD SEAT
- BENCH SEAT WITH STORAGE
- TWO PERSON JOCKEY SEAT
- STAINLESS STEEL HELM UNIT
- LATERAL FOLD DOWN CLEATS
- BIMINI TOP
- COVER
- BOW HATCH CUSHION
- TUBE CHAPS
- CHOCK SET

FOR FULL FEATURE LIST
VISIT OUR WEBSITE
WWW.ABINFATABLES.COM

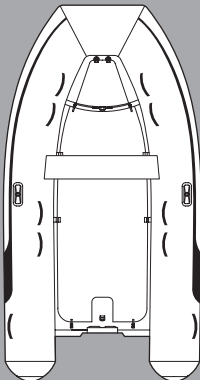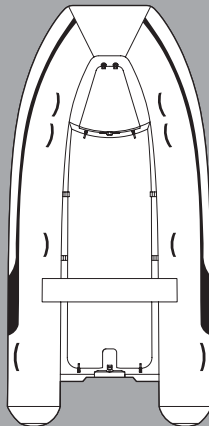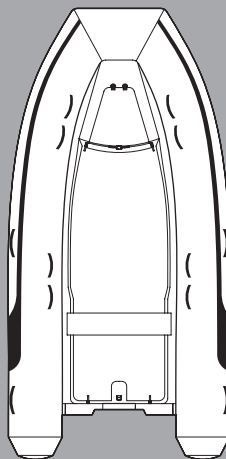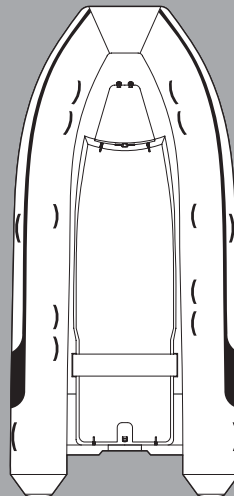


| navigo | 8 VS | 9 VS | 10 VS | 12 VS | 13 VS | 14 VS | | | | | |
|--|---|---|--|---|---|-----------------|----------------------|-----------------|----------------|-----------------|-----------------|
|  |  |  |  |  |  | | | | | | |
| Overall Length | 8' 6" / 2,60m | Overall Length | 9' 6" / 2,90m | Overall Length | 10' 6" / 3,19m | Overall Length | 12' / 3,66m | Overall Length | 13' / 3,96m | Overall Length | 14' / 4,27m |
| Overall Beam | 5' 4" / 1,64m | Overall Beam | 5' 7" / 1,72m | Overall Beam | 5' 7" / 1,72m | Overall Beam | 6' / 1,82m | Overall Beam | 6' 4" / 1,94m | Overall Beam | 6' 4" / 1,94m |
| Inside Length | 5' 10" / 1,79m | Inside Length | 6' 9" / 2,06m | Inside Length | 7' 7" / 2,31m | Inside Length | 8' 9" / 2,67m | Inside Length | 9' 9" / 2,97m | Inside Length | 10' 10" / 3,30m |
| Inside Beam | 2' 4" / 0,72m | Inside Beam | 2' 8" / 0,81m | Inside Beam | 2' 8" / 0,81m | Inside Beam | 2' 9" / 0,84m | Inside Beam | 3' 1" / 0,94m | Inside Beam | 3' 1" / 0,94m |
| Tube Diameter | 16" / 0,40m | Tube Diameter | 17" / 0,43m | Tube Diameter | 17" / 0,43m | Tube Diameter | 18" / 0,46m | Tube Diameter | 18" / 0,46m | Tube Diameter | 19" / 0,48m |
| Person Capacity | 4 | Person Capacity | 4 | Person Capacity | 5 | Person Capacity | 6 | Person Capacity | 7 | Person Capacity | 8 |
| Weight | 125lbs / 57kg | Weight | 143lbs / 65kg | Weight | 169lbs / 77kg | Weight | 202lbs / 92kg | Weight | 293lbs / 133kg | Weight | 348lbs / 158kg |
| Recommended HP | 8 | Recommended HP | 9.9 | Recommended HP | 15 | Recommended HP | 20 | Recommended HP | 30 | Recommended HP | 40 |
| Maximum HP | 10 | Maximum HP | 15 | Maximum HP | 25 | Maximum HP | 30 | Maximum HP | 40 | Maximum HP | 50 |
| Shaft Length | 15" / 38,1cm | Shaft Length | 15" / 38,1cm | Shaft Length | 15" / 38,1cm | Shaft Length | 15-20" / 38,1-50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm |



PICTURE A
BOW LOCKER PROVIDES SEATING
AND AMPLE STORAGE


PICTURE B
NAVIGO MODELS FEATURE AN
ALUMINUM TRANSOM PROTEC-
TOR AND FOUR DAVIT LIFTING
POINTS

[*] Also available in long shaft.





9 VS

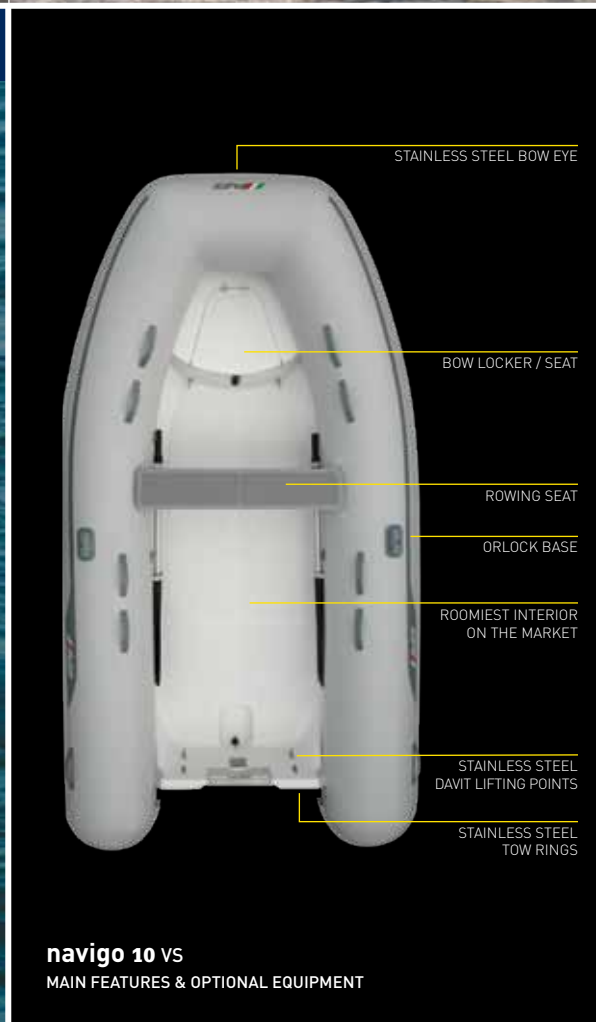

| AVAILABLE OPTIONS TO CUSTOMIZE YOUR BOAT | |
|---|---|
| CONSOLE WITH FORWARD SEAT H 42" / W 18" / D 32" - Weight 48lbs H 1.08m / W 0.45m / D 0.82m - Weight 22Kg | CONSOLE WITHOUT FORWARD SEAT H 38" / W 18" / D 16" - Weight 33lbs H 0.96m / W 0.45m / D 0.40m -Weight 15Kg |
| | |
| FIBERGLASS MODULAR CONSOLE SMALL H 25.62" / W 16.43" / D 18.43" - Weight 24lbs H 73 cm / W 42 cm / D 47 cm - Weight 11Kg | TWO PERSON JOCKEY SEAT H 34" / W 17" / D 48" - Weight 35lbs H 0.86m / W 0.42m / D 1.23m -Weight 16Kg |
| | |
| BENCH SEAT WITH STORAGE H 17" / W 30" / D 16" - Weight 39lbs H 0.43m / W 0.77m / D 0.40m - Weight 18Kg | BOW CLEAT H 4.25" / W 15.87" / D 11.75" - Weight 3.48lbs H 0.10m / W 0.40m / D 0.30m - Weight 1.58Kg |
| | |
| Fits Standard 6 gl Fuel Tank | LATERAL CLEAT H 2.38" / W 11.5" / D 7.5" - Weight 2.16lbs H 0.06m / W 0.3m / D 0.2m - Weight 0.98Kg |
| | |

17

10 VS



ventus

VL

Ventus –Latin for “air”– is our line of lightweight tenders. With their low weight to length ratio and balanced design, Ventus boats require very little horsepower to achieve astonishing performance and speeds. They sport a full V-shape hull that runs the entire length of the boat, providing exceptional tracking and stability. Ventus models are the only lightweight boats on the market with an additional air chamber built into the hull. This air chamber makes the Ventus line extremely safe and reliable, while providing a level non-skid floor to keep your cargo and passengers dry. Ventus boats make ideal tenders with plenty of room for carrying crew and provisions.

LIGHT IN WEIGHT, HEAVY IN FEATURES

Lightweight Fiberglass Tenders

8 VL

9 VL

10 VL

12 VL



9 VL



12 VL

Lightweight fiberglass tender
Ideal sailboat tender
Easily towed and lifted
Spacious interior with deeper freeboard
Full-length deep “V” keel
Special rubber non skid material

STANDARD FEATURES

STAINLESS STEEL BOW EYE
3 STAINLESS STEEL DAVIT
LIFTING POINTS
ROWING SEAT
OARLOCK BASE WITH
OARLOCKS (EXCEPT MODEL 12)
ORCA (CSM) FABRIC HANDLES
ON TUBES
ORCA (CSM) FABRIC
ADDITIONAL AIR RETAINING
CHAMBER UNDER THE FLOOR
SINGLE RUB RAIL
3 LAYER REINFORCED SEAMS
HAND PUMP
NON-SKID RUBBER FLOOR
PANELS
MAINTENANCE KIT
OWNER'S MANUAL





OPTIONAL FEATURES


BIMINI TOP
COVER
TUBE CHAPS
CHOCK SET
BOW STEP W/FOLD DOWN
STAINLESS STEEL CLEAT
FIBERGLASS LATERAL BASE
W/FOLD DOWN STAINLESS
STEEL CLEAT

FOR FULL FEATURE LIST
VISIT OUR WEBSITE
WWW.ABINFATABLES.COM

A

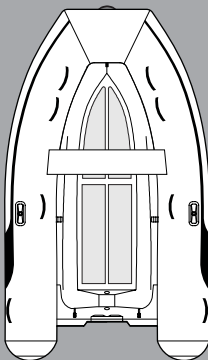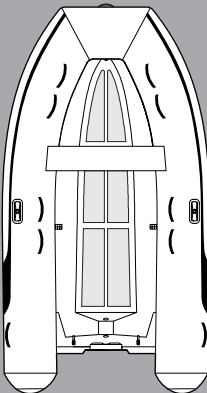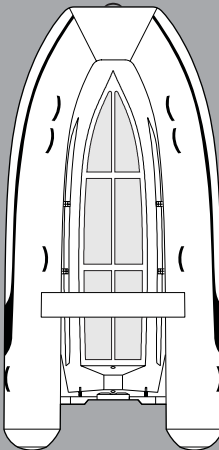

| ventus | | 8 VL | | 9 VL | | 10 VL | | 12 VL | |
|-----------------|----------------|---|---------------|---|----------------|--|----------------|---|--|
| | |  | |  | |  | |  | |
| Overall Length | 8' 6" / 2,60m | Overall Length | 9' 6" / 2,90m | Overall Length | 10' 6" / 3,19m | Overall Length | 12' / 3,66m | | |
| Overall Beam | 5' 6" / 1,68m | Overall Beam | 5' 7" / 1,72m | Overall Beam | 5' 7" / 1,72m | Overall Beam | 5' 10" / 1,77m | | |
| Inside Length | 5' 10" / 1,79m | Inside Length | 6' 9" / 2,06m | Inside Length | 7' 7" / 2,31m | Inside Length | 8' 9" / 2,67m | | |
| Inside Beam | 2' 4" / 0,72m | Inside Beam | 2' 8" / 0,81m | Inside Beam | 2' 8" / 0,81m | Inside Beam | 2' 9" / 0,84m | | |
| Tube Diameter | 16" / 0,40m | Tube Diameter | 17" / 0,43m | Tube Diameter | 17" / 0,43m | Tube Diameter | 18" / 0,46m | | |
| Person Capacity | 4 | Person Capacity | 4 | Person Capacity | 5 | Person Capacity | 6 | | |
| Weight | 95lbs / 43kg | Weight | 106lbs / 48kg | Weight | 123lbs / 56kg | Weight | 156lbs / 71kg | | |
| Recommended HP | 8 | Recommended HP | 9.9 | Recommended HP | 15 | Recommended HP | 20 | | |
| Maximum HP | 10 | Maximum HP | 15 | Maximum HP | 25 | Maximum HP | 30 | | |
| Shaft Length | 15" / 38,1cm | Shaft Length | 15" / 38,1cm | Shaft Length | 15" / 38,1cm | Shaft Length | 15" / 38,1cm | | |

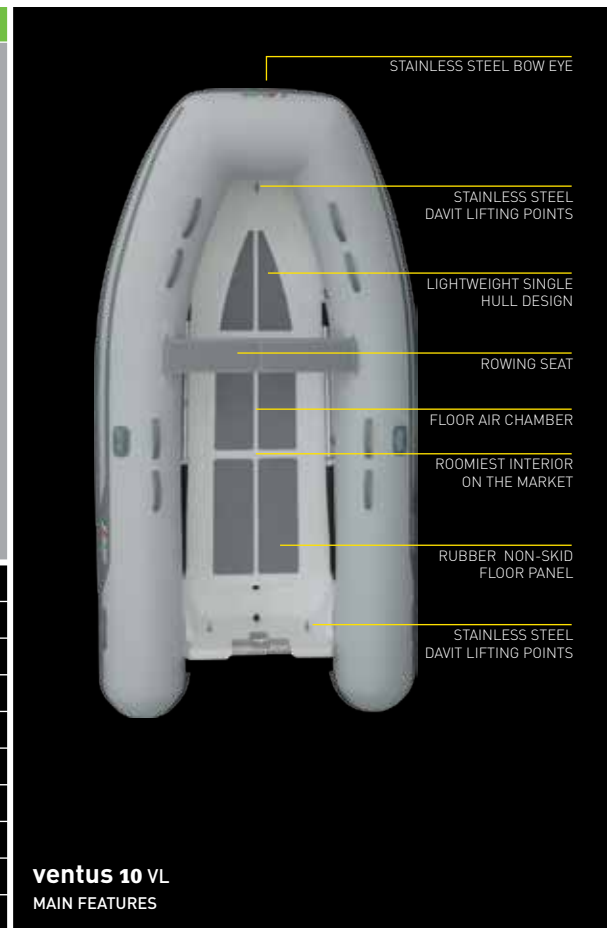

PICTURE A
VENTUS BOATS FEATURE AN ALUMINUM TRANSCOM PROTECTOR, THREE DAVIT LIFTING POINTS, AND AN ADDITIONAL BUILT-IN AIR CHAMBER IN THE FLOOR FOR ADDED SAFETY

PICTURE B
OUR LIGHTWEIGHT DEEP "V" HULLS EXTEND THE FULL LENGTH OF THE BOAT, DISTINGUISHING US FROM THE COMPETITION BY PROVIDING BETTER TRACKING AND STABILITY



EVERY AB INFLATABLE BOAT IS BACKED BY A TEN-YEAR LIMITED WARRANTY. SEE YOUR DEALER FOR DETAILS.



alumina

ALX

Combining the sporty and stylish design of our Oceanus series with the durability and light weight of our Lammina series, the Alumina line is ideal for those who require a rugged, yet lightweight tender. Our Alumina series offers a full-featured console tender that is light enough to meet the requirements of limited capacity davits.

Each Alumina model is equipped with a heavy duty aluminum hull that will resist abrasions from rocky shores, coral and sandy beaches. The lightweight of this hull also means that Alumina boats claim excellent fuel economy and can reach cruising speeds with less horsepower. In addition, the Alumina series features comfortable upholstered seating, smartly designed fiberglass consoles, full hull length rubber keel protector, ample storage space and an integrated bow locker.

A TOUGH LEGEND



14 ALX



12 ALX



EVERY AB INFLATABLE BOAT IS
BACKED BY A TEN-YEAR LIMITED WARRANTY.
SEE YOUR DEALER FOR DETAILS.

Aluminum hull sport console rib
Light weight yet rugged construction
Durable enough for rocky shores & coral reefs
Requires less horsepower



14 ALX

Aluminum Console Tenders

10 ALX

11 ALX

12 ALX

13 ALX

14 ALX

15 ALX

16 ALX



STANDARD FEATURES

- NON-SKID RUBBER FLOOR PANELS
- BOW EYE
- DAVIT LIFTING POINTS
- TOW RINGS
- DOUBLE RUB RAIL
- ORCA (CSM) FABRIC
- HAND PUMP
- MAINTENANCE KIT
- OWNER'S MANUAL
- CLOSED CELL FOAM UPHOLSTERY
- FIBERGLASS CONSOLE
- BENCH SEAT WITH STORAGE
- BOW LOCKER WITH CUSHIONED SEATING
- 3 STAINLESS STEEL FOLD DOWN CLEATS
- BOW STEP
- STANDARD RIGGING
- 3 LAYER REINFORCED SEAMS
- RUBBER KEEL PROTECTOR

OPTIONAL FEATURES

- TUBE CHAPS
- COVER
- CHOCK SET
- BIMINI TOP
- TRANSOM LADDER
- LIFTING HARNESS
- TEAK FLOOR
- STEREO SYSTEM
- COMPASS
- GPS
- VHF RADIO
- CONSOLE WITH LATERAL SEAT

FOR FULL FEATURE LIST
VISIT OUR WEBSITE
WWW.ABINFLATABLES.COM




| alumina | 10 ALX | alumina | 11 ALX | | 12 ALX | | 13 ALX | | 14 ALX | | 15 ALX | | 16 ALX |
|-----------------|----------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|-----------------|-----------------|-----------------|----------------|-----------------|----------------|
| | | | | | | | | | | | | | |
| Overall Length | 10' 6" / 3,19m | Overall Length | 11' 6" / 3,50m | Overall Length | 12' / 3,66m | Overall Length | 13' / 3,96m | Overall Length | 14' / 4,27m | Overall Length | 15' / 4,57m | Overall Length | 16' / 4,88m |
| Overall Beam | 5' 6" / 1,68m | Overall Beam | 5' 7" / 1,70m | Overall Beam | 6' 1" / 1,85m | Overall Beam | 6' 7" / 2,00m | Overall Beam | 6' 7" / 2,00m | Overall Beam | 6' 9" / 2,06m | Overall Beam | 7' / 2,14m |
| Inside Length | 7' 6" / 2,30m | Inside Length | 8' 6" / 2,60m | Inside Length | 8' 10" / 2,70m | Inside Length | 9' 10" / 3,00m | Inside Length | 10' 10" / 3,30m | Inside Length | 11' 8" / 3,55m | Inside Length | 12' 8" / 3,85m |
| Inside Beam | 2' 8" / 0,81m | Inside Beam | 2' 8" / 0,81m | Inside Beam | 2' 11" / 0,89m | Inside Beam | 3' 3" / 0,99m | Inside Beam | 3' 3" / 0,99m | Inside Beam | 3' 4" / 1,03m | Inside Beam | 3' 6" / 1,08m |
| Tube Diameter | 17" / 0,43m | Tube Diameter | 17" / 0,43m | Tube Diameter | 18" / 0,46m | Tube Diameter | 18" / 0,46m | Tube Diameter | 19" / 0,48m | Tube Diameter | 19" / 0,48m | Tube Diameter | 20" / 0,51m |
| Person Capacity | 5 | Person Capacity | 5 | Person Capacity | 6 | Person Capacity | 7 | Person Capacity | 8 | Person Capacity | 9 | Person Capacity | 10 |
| Weight | 255lbs / 116kg | Weight | 284lbs / 129kg | Weight | 315lbs / 143kg | Weight | 341lbs / 155kg | Weight | 367lbs / 167kg | Weight | 392lbs / 178kg | Weight | 469lbs / 213kg |
| Recommended HP | 10 | Recommended HP | 15 | Recommended HP | 25 | Recommended HP | 25 | Recommended HP | 30 | Recommended HP | 30 | Recommended HP | 30 |
| Maximum HP | 20 | Maximum HP | 20 | Maximum HP | 30 | Maximum HP | 30 | Maximum HP | 40 | Maximum HP | 40 | Maximum HP | 50 |
| Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm |

PICTURE A


BOW LOCKER PROVIDES SEATING
AND AMPLE STORAGE

PICTURE B

ALL AB CONSOLES INCLUDE
HATCHES FOR EASY ACCESS TO
ELECTRONICS AND GAUGES



A



B




12 ALX



14 ALX



12 ALX

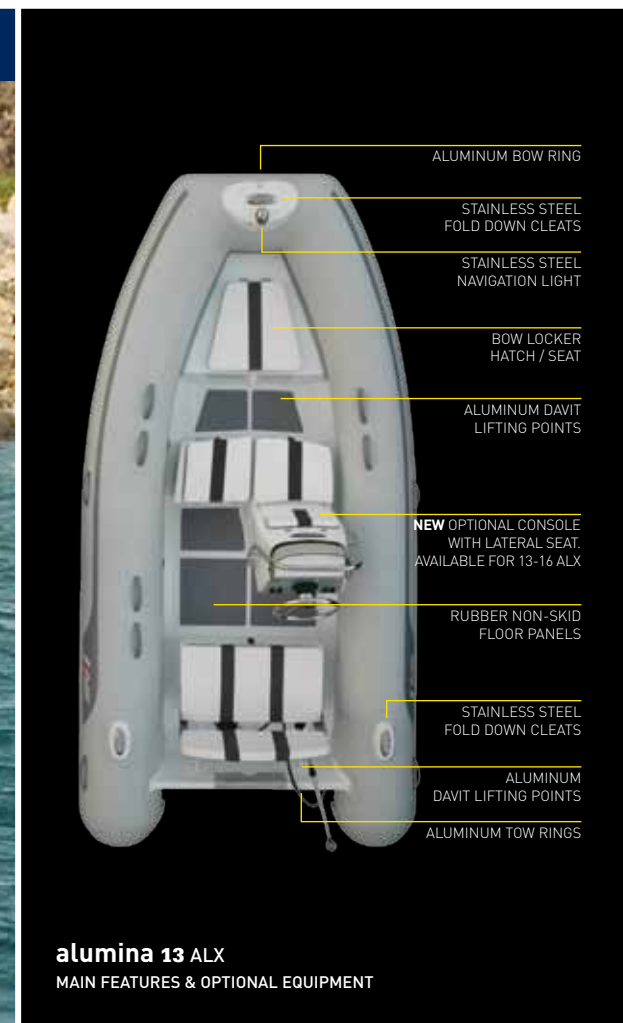

11 ALX



lammina

AL

Lammina is the first line of marine-grade, aluminum-hull inflatables to reach the U.S. market. The Superlight models, available in lengths 9,5 feet and under, feature a 2,28mm (0.090") aluminum hull. The rest of the line, available in lengths 10 feet and larger, sports a 3,17mm (0.125") aluminum hull. The transom thickness on models 8 to 10 feet is 3,17mm (0.125") and from models 11 to 16 feet is 4,7mm (0.190"). These tough, lightweight and durable aluminum hulls will resist abrasions from rocky shores, coral and sandy beaches.

The innovative design of the Lammina series cuts through wakes and chop with far less pounding. The result is an exceptionally dry, stable and superior ride.

AMAZINGLY TOUGH AND LIGHT



EVERY AB INFLATABLE BOAT IS
BACKED BY A TEN-YEAR LIMITED WARRANTY.
SEE YOUR DEALER FOR DETAILS.

Aluminum hull open tender
Light weight yet rugged construction
Perfect for limited capacity davits
Ideal sailboat tender
Durable enough for rocky shores & coral reefs
Special rubber non skid material
Rubber keel protector on full length of keel

Aluminum Tenders

- 8 AL
SUPERLIGHT
- 9 AL
SUPERLIGHT
- 9.5 AL
SUPERLIGHT
- 10 AL
SUPERLIGHT
- 11 AL
SUPERLIGHT
- 12 AL
SUPERLIGHT
- 13 AL
SUPERLIGHT
- 14 AL
SUPERLIGHT
- 15 AL
SUPERLIGHT
- 16 AL
SUPERLIGHT



STANDARD FEATURES

- BOW EYE
- ALUMINUM DAVIT LIFTING POINTS
- ROWING SEAT
[EXCEPT MODELS 12, 13, 14, 15 & 16]
- CLARLOCK BASE WITH CLARLOCKS [EXCEPT MODELS 11, 12, 13, 14, 15 & 16]
- ORCA (CSM) FABRIC HANDLES ON TUBES
- MARINE GRADE ALUMINUM HULLS
- ORCA (CSM) FABRIC
- NON-SKID RUBBER FLOOR PANELS
- SINGLE RUB RAIL MODELS FROM 8 TO 11, DOUBLE RUB RAIL FROM 12 TO 16
- TOW RINGS
- 3 LAYER REINFORCED SEAMS
- HAND PUMP
- RUBBER KEEL PROTECTOR
- MAINTENANCE KIT
- OWNER'S MANUAL

OPTIONAL FEATURES








- BOW STEP WITH FOLD DOWN CLEAT
- FIBERGLASS CONSOLE
- FIBERGLASS CONSOLE WITH FORWARD SEAT
- ONE PERSON JOCKEY SEAT
- TWO PERSON JOCKEY SEAT
- STAINLESS STEEL HELM UNIT
- LATERAL FOLD DOWN CLEATS
- BIMINI TOP
- COVER
- TUBE CHAPS
- CHOCK SET
- BENCH SEAT WITH STORAGE
- BOW LOCKER / SEAT


FOR FULL FEATURE LIST
VISIT OUR WEBSITE
WWW.ABINFATABLES.COM



10 AL SUPERLIGHT

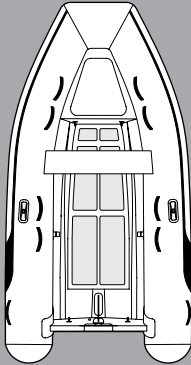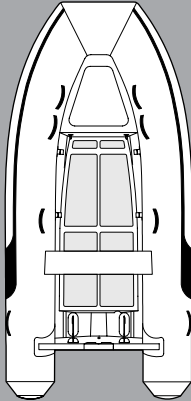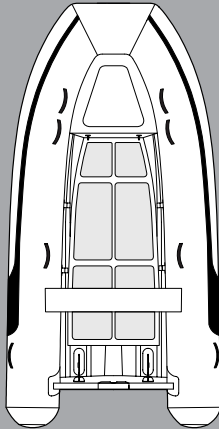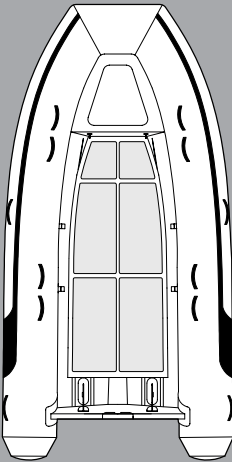

| lammina 8 AL | | 9 AL | | 9.5 AL | | 10 AL | | 11 AL | | 12 AL | | 13 AL | |
|--|----------------|---|---------------|---|----------------|--|----------------|---|----------------|---|----------------|---|-----------------|
| SUPERLIGHT | | SUPERLIGHT | | SUPERLIGHT | | SUPERLIGHT | | SUPERLIGHT | | SUPERLIGHT | | SUPERLIGHT | |
|  | |  | |  | |  | |  | |  | |  | |
| Overall Length | 8' 5" / 2,56m | Overall Length | 9' 1" / 2,76m | Overall Length | 9' 6" / 2,90 | Overall Length | 10' 6" / 3,19m | Overall Length | 11' 6" / 3,50m | Overall Length | 12' / 3,66m | Overall Length | 13' / 3,96m |
| Overall Beam | 4' 9" / 1,45m | Overall Beam | 4' 9" / 1,45m | Overall Beam | 5' 6" / 1,68m | Overall Beam | 5' 6" / 1,68m | Overall Beam | 5' 7" / 1,70m | Overall Beam | 6' 1" / 1,85m | Overall Beam | 6' 7" / 2,00m |
| Inside Length | 5' 10" / 1,79m | Inside Length | 6' 3" / 1,90m | Inside Length | 6' 11" / 2,11m | Inside Length | 7' 6" / 2,30m | Inside Length | 8' 6" / 2,60m | Inside Length | 8' 10" / 2,70m | Inside Length | 9'10" / 3,00m |
| Inside Beam | 2' / 0,62m | Inside Beam | 2' 2" / 0,66m | Inside Beam | 2' 6" / 0,76m | Inside Beam | 2' 8" / 0,81m | Inside Beam | 2' 8" / 0,81m | Inside Beam | 2' 11" / 0,89m | Inside Beam | 3'3" / 0,99m |
| Tube Diameter | 16" / 0,40m | Tube Diameter | 16" / 0,40m | Tube Diameter | 17" / 0,43m | Tube Diameter | 17" / 0,43m | Tube Diameter | 17" / 0,43m | Tube Diameter | 18" / 0,46m | Tube Diameter | 18" / 0,46m |
| Person Capacity | 4 | Person Capacity | 4 | Person Capacity | 5 | Person Capacity | 5 | Person Capacity | 6 | Person Capacity | 6 | Person Capacity | 7 |
| Weight | 73lbs / 33kg* | Weight | 79lbs / 36kg* | Weight | 95lbs / 43kg* | Weight | 117lbs / 53kg* | Weight | 172lbs / 78kg* | Weight | 198lbs / 90kg* | Weight | 220lbs / 100kg* |
| Recommended HP | 4 | Recommended HP | 8 | Recommended HP | 8 | Recommended HP | 10 | Recommended HP | 15 | Recommended HP | 25 | Recommended HP | 25 |
| Maximum HP | 6 | Maximum HP | 10 | Maximum HP | 15 | Maximum HP | 20 | Maximum HP | 20 | Maximum HP | 30 | Maximum HP | 30 |
| Shaft Length | 15" / 38,1cm | Shaft Length | 15" / 38,1cm | Shaft Length | 15" / 38,1cm | Shaft Length | 15" / 38,1cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm |

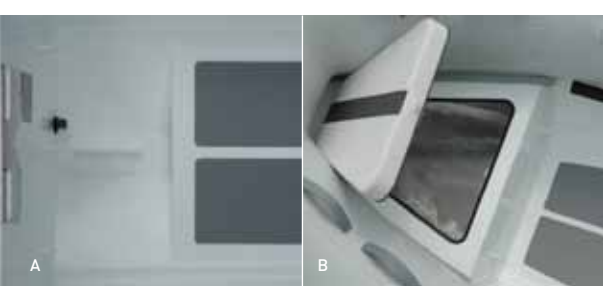

PICTURE A
LAMMINA BOATS INCLUDE AN ALUMINUM TRANSOM PROTECTOR AND WELDED DAVIT LIFTING POINTS


PICTURE B
BOW LOCKER PROVIDES SEATING AND AMPLE STORAGE

(*) WEIGHT WITHOUT BOW LOCKER
ADD 5KG / 11 LBS FOR MODELS 9-11
ADD 7KG / 15 LBS FOR MODELS 12-16





14 AL **15 AL** **16 AL**

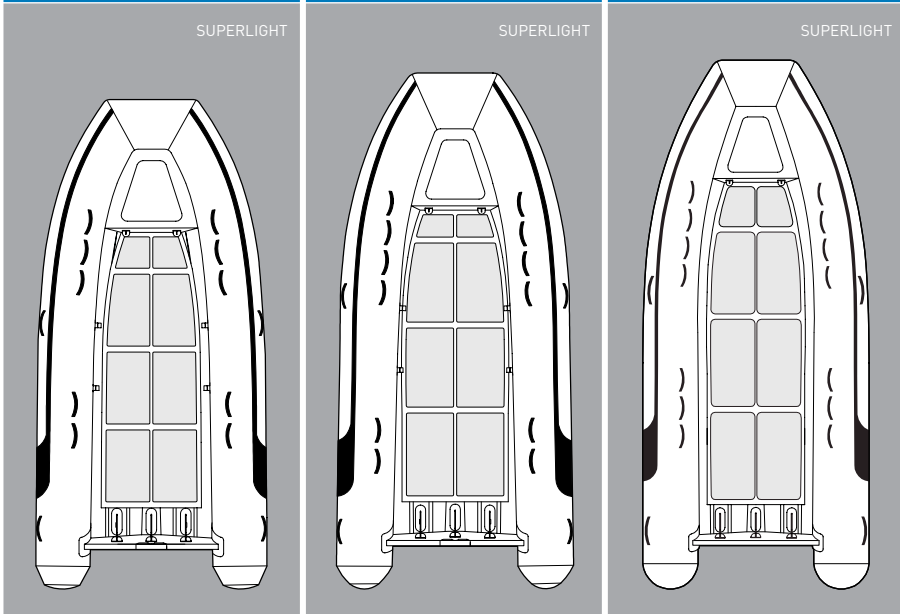

| | | | | | |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Overall Length | 14' / 4,27m | Overall Length | 15' / 4,57m | Overall Length | 16' / 4,88m |
| Overall Beam | 6' 7" / 2,00m | Overall Beam | 6' 9" / 2,06m | Overall Beam | 7' / 2,14m |
| Inside Length | 10' 10" / 3,30m | Inside Length | 11' 8" / 3,55m | Inside Length | 12' 8" / 3,85m |
| Inside Beam | 3' 3" / 0,99m | Inside Beam | 3' 4" / 1,03m | Inside Beam | 3' 6" / 1,08m |
| Tube Diameter | 19" / 0,48m | Tube Diameter | 19" / 0,48m | Tube Diameter | 20" / 0,51m |
| Person Capacity | 8 | Person Capacity | 9 | Person Capacity | 10 |
| Weight | 246lbs / 112kg* | Weight | 271lbs / 123kg* | Weight | 348lbs / 158kg* |
| Recommended HP | 30 | Recommended HP | 30 | Recommended HP | 30 |
| Maximum HP | 40 | Maximum HP | 40 | Maximum HP | 50 |
| Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm | Shaft Length | 20" / 50,8cm |

lammina 12 AL
MAIN FEATURES & OPTIONAL EQUIPMENT

AVAILABLE OPTIONS TO CUSTOMIZE YOUR BOAT

| | |
|---|--|
| CONSOLE WITH FORWARD SEAT H 42" / W 18" / D 32" - Weight 48lbs H 1.08m / W 0.45m / D 0.82m - Weight 22Kg | CONSOLE WITHOUT FORWARD SEAT H 38" / W 18" / D 16" - Weight 33lbs H 0.96m / W 0.45m / D 0.40m - Weight 15Kg |
| | |
| FIBERGLASS MODULAR CONSOLE SMALL H 25.62" / W 16.43" / D 18.43" - Weight 24lbs H 73 cm / W 42 cm / D 47 cm - Weight 11Kg | TWO PERSON JOCKEY SEAT H 34" / W 17" / D 48" - Weight 35lbs H 0.86m / W 0.42m / D 1.23m - Weight 16Kg |
| | |
| BENCH SEAT WITH STORAGE H 17" / W 30" / D 16" - Weight 39lbs H 0.43m / W 0.77m / D 0.40m - Weight 18Kg | BOW CLEAT H 4.25" / W 15.87" / D 11.75" - Weight 3.48lbs H 0.10m / W 0.40m / D 0.30m - Weight 1.58Kg |
| | |
| Fits Standard 6 gl Fuel Tank | LATERAL CLEAT H 2.38" / W 11.5" / D 7.5" - Weight 2.16lbs H 0.06m / W 0.3m / D 0.2m - Weight 0.98Kg |
| | |





lammina | UL

Ultra Light Aluminum Tenders

AB's commitment to innovation remains at the forefront in the development and design of "Ultra" Light Aluminum Hull RIBs. Using the same high quality and Orca (CSM) five layer coated fabric tubes, we offer a less expensive version of our already popular AL series. The 3.17mm/0.125" thick marine grade aluminum hull and non-skid floor of the new unpainted 8, 9 and 10' models combine durability with exceptionally reasonable pricing.

The New ULs are the lightest and more spacious light series boats in the market. While the unpainted hull provides for minimum maintenance, the rubber non-skid floor adds comfort and safety. The UL series are the preferred choice among sail boaters around the world.

EXTREMELY LIGHT IN WEIGHT AND PRICE



9 UL



9 UL



Aluminum hull open tender
Ultra light and spacious
Ideal sailboat tender
Special rubber non-skid material
Exceptionally reasonable pricing

STANDARD FEATURES


- MARINE GRADE ALUMINUM HULLS
- NON-SKID RUBBER FLOOR PANELS
- ORCA (CSM) FABRIC
- BOW EYE
- ALUMINUM DAVIT LIFTING POINTS
- SINGLE RUB RAIL
- ORCA (CSM) FABRIC HANDLES ON TUBES
- ROWING SEAT
- OARLOCK BASE WITH OARLOCKS
- HAND PUMP
- MAINTENANCE KIT
- OWNER'S MANUAL
- 3 LAYER REINFORCED SEAMS

OPTIONAL FEATURES

- COVER
- TUBE CHAPS
- CHOCK SET



| lammina | 8 UL | 9 UL | 10 UL |
|-----------------|----------------|-----------------|----------------|
| | | | |
| Overall Length | 8' 5" / 2,56m | Overall Length | 9' 1" / 2,76m |
| Overall Beam | 4' 10" / 1,47m | Overall Beam | 4' 11" / 1,50m |
| Inside Length | 5' 10" / 1,79m | Inside Length | 6' 3" / 1,90m |
| Inside Beam | 2' 2" / 0,66m | Inside Beam | 2' 3" / 0,70m |
| Tube Diameter | 16" / 0,40m | Tube Diameter | 16" / 0,40m |
| Person Capacity | 4 | Person Capacity | 4 |
| Weight | 68lbs / 31kg | Weight | 75lbs / 34kg |
| Recommended HP | 4 | Recommended HP | 6 |
| Maximum HP | 5 | Maximum HP | 8 |
| Shaft Length | 15" / 38,1cm | Shaft Length | 15" / 38,1cm |
| | | Overall Length | 10' / 3,05m |
| | | Overall Beam | 5' 6" / 1,68m |
| | | Inside Length | 7' 2" / 2,18m |
| | | Inside Beam | 2' 8" / 0,81m |
| | | Tube Diameter | 17" / 0,43m |
| | | Person Capacity | 5 |
| | | Weight | 95lbs / 43kg |
| | | Recommended HP | 8 |
| | | Maximum HP | 9.9 |
| | | Shaft Length | 15" / 38,1cm |

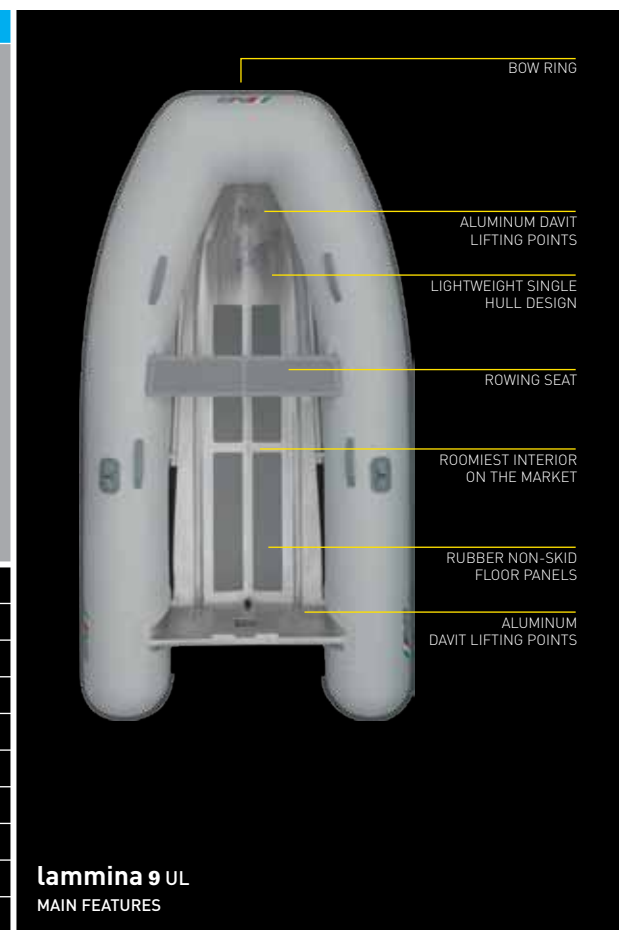

PICTURE A
LAMMINA BOATS INCLUDE AN
ALUMINUM TRANSM PROTECTOR
AND THREE WELDED DAVIT
LIFTING POINTS



EVERY AB INFLATABLE
BOAT IS BACKED BY
A TEN-YEAR LIMITED
WARRANTY. SEE YOUR
DEALER FOR DETAILS.



ab rider

Jockey Style Rider

The new AB Rider delivers the ultimate water experience. Its unsurpassed design and outstanding performance will give you many hours of safe and exhilarating fun.

This lightweight, fuel efficient and exciting 10' inflatable has ample seating for two adults and plenty of storage to keep your cargo protected and dry at all times. It is still a tender to your mother ship and can easily be lifted by its four davit lifting points for storage.

The AB Rider was made with the same safety features found on our inflatable boats such as three air chambers and tough Orca(CSM) material. The AB Rider was designed for those looking for a new type of thrilling and versatile water craft.

EXHILARATING FUN



The ultimate water experience
Outstanding performance
Lightweight and fuel efficient
A thrilling and versatile water craft

STANDARD FEATURES

- STAINLESS STEEL BOW EYE
- UNDER SEAT STORAGE COMPARTMENT
- LARGE ANCHOR LOCKER
- 4 STAINLESS STEEL DAVIT LIFTING POINTS
- INTEGRATED JOCKEY SEAT
- MAINTENANCE KIT
- SINGLE RUB RAIL
- CLOSED CELL FOAM UPHOLSTERY
- STAINLESS STEEL TOW RINGS
- 3 LAYER REINFORCED SEAMS
- STANDARD RIGGING
- ORCA (CSM) FABRIC
- HAND PUMP
- OWNER'S MANUAL


OPTIONAL FEATURES

- COVER


FOR FULL FEATURE LIST
VISIT OUR WEBSITE
WWW.ABINFATABLES.COM



ab rider

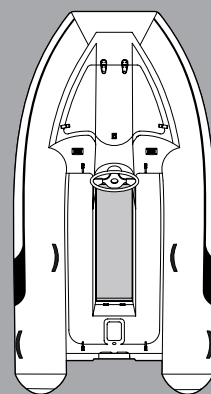

| | |
|-----------------|----------------|
| Overall Length | 10' 6" / 3,20m |
| Overall Beam | 5' 9" / 1,76m |
| Inside Length | 7' 9" / 2,37m |
| Inside Beam | 2' 10" / 0,86m |
| Tube Diameter | 17" / 0,43m |
| Person Capacity | 4 |
| Weight | 273lbs / 124kg |
| Recommended HP | 25 |
| Maximum HP | 30 |
| Shaft Length | 20" / 50,8cm |

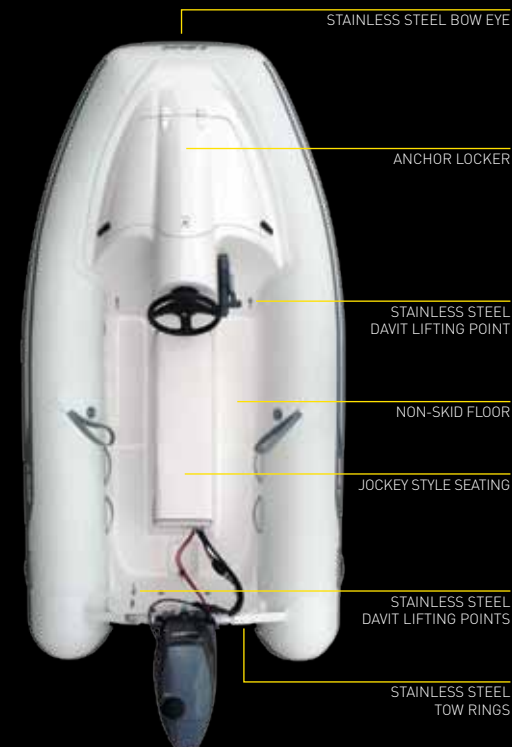

ab rider MAIN FEATURES



PICTURE A
THE AB RIDER OFFERS AMPLE
STORAGE BENEATH THE BOW
LOCKER TO HOLD THE FUEL TANK,
ANCHOR AND OTHER GOODS.

PICTURE B
THERE IS AMPLE STORAGE SPACE
BENEATH THE SEATING AREA.



EVERY AB INFLATABLE
BOAT IS BACKED BY
A TEN-YEAR LIMITED
WARRANTY. SEE YOUR
DEALER FOR DETAILS.



specifications



| nautilus | | | | | | | | |
|----------|--------|--------|--------|--------|--------------------------------|--------------------------------|---------------------------------------|--|
| 11 DLX | 12 DLX | 13 DLX | 14 DLX | 15 DLX | 17 DLX WIDEBODY BOWRIDER | 19 DLX WIDEBODY BOWRIDER | 19 DLX-I/O WIDEBODY BOWRIDER*** | |



| oceanus | | | | | | | | |
|---------|--------|--------|--------|--------|--------|---------------------|----------|--|
| 11 VST | 12 VST | 13 VST | 14 VST | 15 VST | 19 VST | 24 VST BOWRIDER* | 28 VST** | |

LENGTH

| | | | | | | | | | | | | | | | | | |
|---------|-------|------|-------|-------|---------|--------|--------|--------|--------|-------|-------|-------|---------|--------|---------|--------|---------|
| OVERALL | ft/in | 11' | 12' | 13' | 14' | 15' | 17' | 19' | 19' | 11' | 12' | 13' | 14' | 15' | 19' | 24' | 27'4" |
| | m | 3.35 | 3.66 | 3.96 | 4.27 | 4.57 | 5.18 | 5.79 | 5.79 | 3.35 | 3.66 | 3.96 | 4.27 | 4.57 | 5.79 | 7.31 | 8.33 |
| INSIDE | ft/in | 8' | 9' 2" | 9' 9" | 10' 10" | 11' 6" | 13' 1" | 15' 4" | 15' 4" | 8' 1" | 9' 2" | 9' 9" | 10' 10" | 11' 6" | 14' 11" | 19' 3" | 22' 11" |
| | m | 2.44 | 2.79 | 2.97 | 3.30 | 3.50 | 4.00 | 4.67 | 4.67 | 2.47 | 2.79 | 2.97 | 3.30 | 3.50 | 4.55 | 5.87 | 6.99 |

BEAM

| | | | | | | | | | | | | | | | | | |
|---------|-------|--------|--------|-------|-------|-------|-------|-------|-------|-------|--------|-------|-------|-------|-------|-------|--------|
| OVERALL | ft/in | 5' 10" | 6' | 6' 5" | 6' 6" | 6' 9" | 8' 1" | 8' 4" | 8' 4" | 5' 8" | 6' 1" | 6' 4" | 6' 5" | 6' 6" | 8' 4" | 9' 3" | 10' 1" |
| | m | 1.78 | 1.82 | 1.95 | 1.98 | 2.05 | 2.46 | 2.54 | 2.54 | 1.76 | 1.86 | 1.93 | 1.96 | 1.99 | 2.53 | 2.82 | 3.07 |
| INSIDE | ft/in | 2' 7" | 2' 10" | 3' 1" | 3' 1" | 3' 2" | 4' 5" | 4' 5" | 4' 5" | 2' 9" | 2' 10" | 3' 1" | 3' 1" | 3' 2" | 4' 4" | 5' 4" | 6' 4" |
| | m | 0.79 | 0.86 | 0.94 | 0.94 | 0.97 | 1.35 | 1.35 | 1.35 | 0.84 | 0.86 | 0.94 | 0.94 | 0.97 | 1.32 | 1.64 | 1.93 |

AREA

| | | | | | | | | | | | | | | | | | |
|---------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|
| INTERNAL AREA | sq.ft. | 20.75 | 25.83 | 30.05 | 33.39 | 36.54 | 58.13 | 67.86 | 67.86 | 22.33 | 25.83 | 30.05 | 33.39 | 36.54 | 64.65 | 103.62 | 145.21 |
| | m2 | 1.93 | 2.40 | 2.79 | 3.10 | 3.40 | 5.40 | 6.30 | 6.30 | 2.07 | 2.40 | 2.79 | 3.10 | 3.40 | 6.01 | 9.63 | 13.49 |

MAX TUBE DIAMETER

| | | | | | | | | | | | | | | | | | |
|--|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | ft/in | 17" | 18" | 18" | 19" | 19" | 20" | 22" | 22" | 17" | 18" | 18" | 19" | 19" | 22" | 24" | 24" |
| | m | 0.43 | 0.46 | 0.46 | 0.48 | 0.48 | 0.51 | 0.56 | 0.56 | 0.43 | 0.46 | 0.46 | 0.48 | 0.48 | 0.56 | 0.61 | 0.61 |

NUMBER OF CHAMBERS

| | | | | | | | | | | | | | | | | | |
|--|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | 3 | 3 | 3 | 5 | 5 | 5 | 5 | 5 | 3 | 3 | 3 | 5 | 5 | 5 | 6 | 6 |
|--|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

CAPACITY

| | | | | | | | | | | | | | | | | | |
|---------|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| PERSONS | | 4 | 5 | 5 | 6 | 6 | 10 | 10 | 10 | 5 | 6 | 7 | 8 | 9 | 15 | 20 | 25 |
| PAYLOAD | lbs | 1258 | 1501 | 1593 | 2010 | 2222 | 2645 | 3061 | 3191 | 1318 | 1699 | 1759 | 2184 | 2277 | 3901 | 4525 | 5034 |
| | kg | 571 | 681 | 723 | 912 | 1008 | 1200 | 1389 | 1448 | 598 | 771 | 798 | 991 | 1033 | 1770 | 2053 | 2284 |

WEIGHT

| | | | | | | | | | | | | | | | | | |
|--|-----|-----|-----|-----|-----|-----|------|------|------|-----|-----|-----|-----|-----|------|------|------|
| | lbs | 440 | 515 | 579 | 711 | 739 | 1181 | 1639 | 1551 | 370 | 405 | 477 | 510 | 605 | 1252 | 2213 | 2853 |
| | kg | 200 | 234 | 263 | 323 | 336 | 537 | 745 | 705 | 168 | 184 | 217 | 232 | 275 | 569 | 1006 | 1297 |

ENGINE

| | | | | | | | | | | | | | | | | | |
|--------------|-----|------|------|------|------|------|------|-------|-------|------|------|------|------|------|-------|-------|-------|
| RECOMMENDED | hp | 30 | 30 | 40 | 50 | 60 | 90 | 115 | 150 | 30 | 30 | 40 | 50 | 60 | 115 | 150 | 250 |
| | kW | 22.4 | 22.4 | 29.8 | 37.3 | 44.8 | 67.1 | 85.8 | 111.9 | 22.4 | 22.4 | 29.8 | 37.3 | 44.8 | 85.8 | 111.9 | 186.5 |
| MAX | hp | 40 | 40 | 60 | 70 | 75 | 115 | 150 | 220 | 40 | 40 | 60 | 70 | 75 | 150 | 250 | 450 |
| | kW | 29.8 | 29.8 | 44.8 | 52.2 | 56.0 | 85.8 | 111.9 | 164.1 | 29.8 | 29.8 | 44.8 | 52.2 | 56.0 | 111.9 | 186.5 | 335.7 |
| SHAFT LENGTH | in | 20 | 20 | 20 | 20 | 20 | 20 | 25 | | 20 | 20 | 20 | 20 | 20 | 25 | 25 | 30 |
| | cm | 50.8 | 50.8 | 50.8 | 50.8 | 50.8 | 50.8 | 63.5 | | 50.8 | 50.8 | 50.8 | 50.8 | 50.8 | 63.5 | 63.5 | 76.2 |
| MAX WEIGHT | lbs | 242 | 242 | 255 | 257 | 330 | 484 | 491 | 609 | 242 | 242 | 255 | 257 | 330 | 491 | 814 | 1241 |
| | kg | 110 | 110 | 116 | 117 | 150 | 220 | 223 | 277 | 110 | 110 | 116 | 117 | 150 | 223 | 370 | 564 |

BUILT-IN TANKS

| | | | | | | | | | | | | | | | | | |
|-------|-----|----|----|----|----|-----|-----|-----|-----|----|----|----|----|----|-----|-----|-----|
| GAS | gal | 11 | 13 | 15 | 21 | 27 | 33 | 67 | 67 | 10 | 10 | 14 | 14 | 25 | 44 | 65 | 189 |
| | lt | 42 | 49 | 57 | 78 | 102 | 125 | 254 | 254 | 38 | 38 | 53 | 53 | 95 | 167 | 246 | 715 |
| WATER | gal | | | | 9 | 12 | 10 | 20 | 20 | | | | | | 11 | 12 | 12 |
| | lt | | | | 34 | 45 | 38 | 76 | 76 | | | | | | 42 | 45 | 45 |

STOWED DIMENSIONS

| | | | | | | | | | | | | | | | | | |
|---------------------------|------|------------|------------|------------|-------------|-------------|-------------|-------------|-------------|------------|------------|------------|------------|------------|------------|------------|-------------|
| (LENGTH x WIDTH x HEIGHT) | inch | 126x47x37 | 132x51x28 | 148x50x37 | 157x59x43 | 169x59x43 | 192x54x47 | 216x54x47 | 216x54x47 | 126x47x26 | 132x49x28 | 146x51x26 | 156x49x28 | 169x59x29 | 213x75x32 | 276x87x35 | 323x113x47 |
| | cm | 320x120x95 | 335x130x70 | 375x127x95 | 400x150x110 | 430x150x110 | 490x137x130 | 550x137x130 | 550x137x130 | 320x120x65 | 335x125x70 | 370x130x70 | 395x125x70 | 430x150x73 | 540x190x80 | 700x220x90 | 820x288x120 |

RDC DESIGN CATEGORY

| | | | | | | | | | | | | | | | | | |
|--|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | C | C | C | C | C | C | C | C | C | C | C | C | C | C | B | B |
|--|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

(*) 20" SHAFT ON TWIN ENGINES
(**) 25" SHAFT ON TWIN ENGINES
(***) AVAILABLE IN GAS OR DIESEL I/O AND GAS JET
(****) AVAILABLE FOR SHORT & LONG SHAFT ENGINES



EVERY AB INFLATABLE BOAT IS BACKED BY A TEN-YEAR LIMITED WARRANTY. SEE YOUR DEALER FOR DETAILS.



| | | | | | | | | | | | | | | | | | | | | |
|--------|--------|--|------|-------|-------|-------|-------|---|------|-------|-------|--|--------|--------|--------|--------|--------|------------|--------------------|--------------------|
| | |  | | | | | |  | | | |  | | | | | | | | |
| mares | | navigo | | | | | | ventus | | | | alumina | | | | | | lammina AL | | |
| 10 VSX | 12 VSX | 8 VS | 9 VS | 10 VS | 12 VS | 13 VS | 14 VS | 8 VL | 9 VL | 10 VL | 12 VL | 10 ALX | 11 ALX | 12 ALX | 13 ALX | 14 ALX | 15 ALX | 16 ALX | 8 AL SUPERLIGHT | 9 AL SUPERLIGHT |

| | | | | | | | | | | | | | | | | | | | | |
|--------|-------|--------|-------|--------|-------|-------|---------|--------|-------|--------|-------|--------|--------|--------|-------|---------|--------|--------|--------|-------|
| 10' 6" | 12' | 8' 6" | 9' 6" | 10' 6" | 12' | 13' | 14' | 8' 6" | 9' 6" | 10' 6" | 12' | 10' 6" | 11' 6" | 12' | 13' | 14' | 15' | 16' | 8' 5" | 9' 1" |
| 3.19 | 3.66 | 2.60 | 2.90 | 3.19 | 3.66 | 3.96 | 4.27 | 2.60 | 2.90 | 3.19 | 3.66 | 3.19 | 3.50 | 3.66 | 3.96 | 4.27 | 4.57 | 4.88 | 2.56 | 2.76 |
| 7' 7" | 8' 9" | 5' 10" | 6' 9" | 7' 7" | 8' 9" | 9' 9" | 10' 10" | 5' 10" | 6' 9" | 7' 7" | 8' 9" | 7' 6" | 8' 6" | 8' 10" | 9'10" | 10' 10" | 11' 8" | 12' 8" | 5' 10" | 6' 3" |
| 2.31 | 2.67 | 1.79 | 2.06 | 2.31 | 2.67 | 2.97 | 3.30 | 1.79 | 2.06 | 2.31 | 2.67 | 2.30 | 2.60 | 2.70 | 3.00 | 3.30 | 3.55 | 3.85 | 1.79 | 1.90 |

| | | | | | | | | | | | | | | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|-------|-------|--------|-------|-------|-------|-------|-------|-------|
| 5' 7" | 6' | 5' 4" | 5' 7" | 5' 7" | 6' | 6' 4" | 6' 4" | 5' 6" | 5' 7" | 5' 7" | 5' 10" | 5' 6" | 5' 7" | 6' 1" | 6' 7" | 6' 7" | 6' 9" | 7' | 4' 9" | 4' 9" |
| 1.72 | 1.82 | 1.64 | 1.72 | 1.72 | 1.82 | 1.94 | 1.94 | 1.68 | 1.72 | 1.72 | 1.77 | 1.68 | 1.70 | 1.85 | 2.00 | 2.00 | 2.06 | 2.14 | 1.45 | 1.45 |
| 2' 8" | 2' 9" | 2' 4" | 2' 8" | 2' 8" | 2' 9" | 3' 1" | 3' 1" | 2' 4" | 2' 8" | 2' 8" | 2' 9" | 2' 8" | 2' 8" | 2' 11" | 3'3" | 3'3" | 3' 4" | 3' 6" | 2' | 2' 2" |
| 0.81 | 0.84 | 0.72 | 0.81 | 0.81 | 0.84 | 0.94 | 0.94 | 0.72 | 0.81 | 0.81 | 0.84 | 0.81 | 0.81 | 0.89 | 0.99 | 0.99 | 1.03 | 1.08 | 0.62 | 0.66 |

| | | | | | | | | | | | | | | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 20.14 | 24.14 | 13.87 | 17.96 | 20.14 | 24.14 | 30.05 | 33.39 | 13.87 | 17.96 | 20.14 | 24.14 | 20.05 | 22.67 | 25.87 | 31.97 | 35.17 | 39.36 | 44.76 | 11.95 | 13.50 |
| 1.87 | 2.24 | 1.29 | 1.67 | 1.87 | 2.24 | 2.79 | 3.10 | 1.29 | 1.67 | 1.87 | 2.24 | 1.86 | 2.11 | 2.40 | 2.97 | 3.27 | 3.66 | 4.16 | 1.11 | 1.25 |

| | | | | | | | | | | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 17" | 18" | 16" | 17" | 17" | 18" | 18" | 19" | 16" | 17" | 17" | 18" | 17" | 17" | 18" | 18" | 19" | 19" | 20" | 16" | 16" |
| 0.43 | 0.46 | 0.40 | 0.43 | 0.43 | 0.46 | 0.46 | 0.48 | 0.40 | 0.43 | 0.43 | 0.46 | 0.43 | 0.43 | 0.46 | 0.46 | 0.48 | 0.48 | 0.51 | 0.40 | 0.40 |

| | | | | | | | | | | | | | | | | | | | | |
|---|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|---|---|---|---|---|---|
| 3 | 3 | 3+1 | 3+1 | 3+1 | 3+1 | 3+1 | 4+1 | 3+1 | 3+1 | 3+1 | 3+1 | 3 | 3 | 3 | 3 | 4 | 5 | 5 | 3 | 3 |
|---|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|---|---|---|---|---|---|

| | | | | | | | | | | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 4 | 5 | 4 | 4 | 5 | 6 | 7 | 8 | 4 | 4 | 5 | 6 | 5 | 5 | 6 | 7 | 8 | 9 | 10 | 4 | 4 |
| 1408 | 1895 | 1087 | 1358 | 1470 | 1935 | 1942 | 2347 | 1115 | 1393 | 1514 | 1975 | 1441 | 1576 | 1920 | 1997 | 2391 | 2557 | 2488 | 1042 | 1089 |
| 639 | 860 | 493 | 616 | 667 | 878 | 881 | 1065 | 506 | 632 | 687 | 896 | 654 | 715 | 871 | 906 | 1085 | 1160 | 1129 | 473 | 494 |

| | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| 262 | 337 | 125 | 143 | 169 | 202 | 293 | 348 | 95 | 106 | 123 | 156 | 255 | 284 | 315 | 341 | 367 | 392 | 469 | 73 | 79 |
| 119 | 153 | 57 | 65 | 77 | 92 | 133 | 158 | 43 | 48 | 56 | 71 | 116 | 129 | 143 | 155 | 167 | 178 | 213 | 33 | 36 |

| | | | | | | | | | | | | | | | | | | | | |
|------|------|------|------|------|-------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 25 | 25 | 8 | 9.9 | 15 | 20 | 30 | 40 | 8 | 9.9 | 15 | 20 | 10 | 15 | 25 | 25 | 30 | 30 | 30 | 4 | 8 |
| 18.7 | 18.7 | 6.0 | 7.4 | 11.2 | 14.9 | 22.4 | 29.8 | 6.0 | 7.4 | 11.2 | 14.9 | 7.5 | 11.2 | 18.7 | 18.7 | 22.4 | 22.4 | 22.4 | 3.0 | 6.0 |
| 30 | 30 | 10 | 15 | 25 | 30 | 40 | 50 | 10 | 15 | 25 | 30 | 20 | 20 | 30 | 30 | 40 | 40 | 50 | 6 | 10 |
| 22.4 | 22.4 | 7.5 | 11.2 | 18.7 | 22.4 | 29.8 | 37.3 | 7.5 | 11.2 | 18.7 | 22.4 | 14.9 | 14.9 | 22.4 | 22.4 | 29.8 | 29.8 | 37.3 | 4.5 | 7.5 |
| 15 | 20 | 15 | 15 | 15 | 15 - 20 | 20 | 20 | 15 | 15 | 15 | 15 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 15 | 15 |
| 38.1 | 50.8 | 38.1 | 38.1 | 38.1 | 38,1 - 50,8 | 50.8 | 50.8 | 38.1 | 38.1 | 38.1 | 38.1 | 50.8 | 50.8 | 50.8 | 50.8 | 50.8 | 50.8 | 50.8 | 38.1 | 38.1 |
| 176 | 176 | 106 | 121 | 176 | 183 | 242 | 253 | 106 | 121 | 176 | 183 | 132 | 132 | 183 | 183 | 242 | 242 | 253 | 62 | 106 |
| 80 | 80 | 48 | 55 | 80 | 83 | 110 | 115 | 48 | 55 | 80 | 83 | 60 | 60 | 83 | 83 | 110 | 110 | 115 | 28 | 48 |

| | | | | | | | | | | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | | | | | |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 118x43x18 | 136x45x18 | 92x43x18 | 106x43x18 | 118x43x18 | 136x45x18 | 144x49x26 | 156x49x28 | 93x43x18 | 106x43x18 | 118x43x18 | 136x45x18 | 119x44x19 | 132x44x19 | 138x46x26 | 144x47x32 | 159x47x32 | 167x47x32 | 182x55x32 | 91x44x19 | 96x44x19 |
| 300x110x45 | 345x115x45 | 235x110x45 | 270x110x45 | 300x110x45 | 345x115x45 | 365x125x65 | 395x125x70 | 235x110x45 | 270x110x45 | 300x110x45 | 345x115x45 | 302x113x47 | 334x113x47 | 350x116x65 | 365x120x82 | 405x120x82 | 425x120x82 | 463x140x82 | 231x113x47 | 245x113x47 |

| | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C | C | C | C | C | C | C | C | C | C | C | C | C | C | C | C | C | C | C | C | C |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

PERSONS & LOAD CAPACITIES WILL VARY WHEN BOAT IS RIGGED WITH NON-STANDARD ACCESSORIES. THE MAXIMUM PAYLOAD & PERSON CAPACITY HAS BEEN CALCULATED ACCORDING TO ISO & ABYC STANDARDS. OPERATING AT OR NEAR MAXIMUM CAPACITIES IS ONLY ADVISED IN CALM WATER AND AT REDUCED SPEEDS. ALL DIMENSIONS IN ACCORDANCE WITH ISO 6185 AND ISO 8666. APPROXIMATE WEIGHT HAS A TOLERANCE OF +/- 5% AND INCLUDES ALL STANDARD ACCESSORIES EXCEPT ON MODELS VS,VL & AL WHICH IS FOR BARE BOAT ONLY. ADD APPROXIMATELY 45LBS TO CONSOLE BOATS FOR ACCESSORIES LIKE: BATTERY, FUEL/WATER FILTER, BILGE PUMP, STEERING SYSTEM & FIRE EXTINGUISHER. ALL DIMENSIONS ARE + OR -3%. SOME MODELS SHOWN MAY FEATURE NON-STANDARD EQUIPMENT. SEE STANDARD AND OPTIONAL EQUIPMENT LISTINGS FOR FULL DETAILS.

THE PHOTOGRAPHS IN THIS BROCHURE WERE TAKEN UNDER CONTROLLED CONDITIONS, USING PROFESSIONAL OPERATORS. YOU SHOULD NEVER ATTEMPT ANY SPEEDS OR MANEUVERS WHICH ARE BEYOND YOUR CAPABILITIES, NOR WHICH ARE POTENTIALLY HAZARDOUS. WE STRONGLY SUGGEST USING RECOMMENDED HP'S ON THE BOAT. YOU SHOULD CONSULT YOUR LOCAL DEALER REGARDING SAFETY AND WEIGHT ISSUES BEFORE PUTTING MAXIMUM HP'S ON YOUR BOAT. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE, ALTHOUGH ALL DETAILS SHOWN ARE ACCURATE AT THE TIME OF GOING TO PRESS. FOLLOWING A PROGRAM OF CONTINUOUS IMPROVEMENT, AB RESERVES THE RIGHT TO DELETE OR MODIFY ANY OF THE PRODUCTS IN THIS BROCHURE WITHOUT NOTICE.

specifications



lammina AL

| 9.5 AL SUPERLIGHT | 10 AL SUPERLIGHT | 11 AL SUPERLIGHT | 12 AL SUPERLIGHT | 13 AL SUPERLIGHT | 14 AL SUPERLIGHT | 15 AL SUPERLIGHT | 16 AL SUPERLIGHT |
|----------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
|----------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|

lammina UL

| 8 UL ULTRALIGHT | 9 UL ULTRALIGHT | 10 UL ULTRALIGHT |
|--------------------|--------------------|---------------------|
|--------------------|--------------------|---------------------|

ab rider

LENGTH

| | | | | | | | | | | | | | |
|---------|-------|--------|--------|--------|--------|--------|---------|--------|--------|--------|-------|-------|--------|
| OVERALL | ft/in | 9' 6" | 10' 6" | 11' 6" | 12' | 13' | 14' | 15' | 16' | 8' 5" | 9' 1" | 10' | 10' 6" |
| | m | 2.90 | 3.19 | 3.50 | 3.66 | 3.96 | 4.27 | 4.57 | 4.88 | 2.56 | 2.76 | 3.05 | 3.20 |
| INSIDE | ft/in | 6' 11" | 7' 6" | 8' 6" | 8' 10" | 9' 10" | 10' 10" | 11' 8" | 12' 8" | 5' 10" | 6' 3" | 7' 2" | 7' 9" |
| | m | 2.11 | 2.30 | 2.60 | 2.70 | 3.00 | 3.30 | 3.55 | 3.85 | 1.79 | 1.90 | 2.18 | 2.37 |

BEAM

| | | | | | | | | | | | | | |
|---------|-------|-------|-------|-------|--------|-------|-------|-------|-------|--------|--------|-------|--------|
| OVERALL | ft/in | 5' 6" | 5' 6" | 5' 7" | 6' 1" | 6' 7" | 6' 7" | 6' 9" | 7' | 4' 10" | 4' 11" | 5' 6" | 5' 9" |
| | m | 1.68 | 1.68 | 1.70 | 1.85 | 2.00 | 2.00 | 2.06 | 2.14 | 1.47 | 1.50 | 1.68 | 1.76 |
| INSIDE | ft/in | 2' 6" | 2' 8" | 2' 8" | 2' 11" | 3' 3" | 3' 3" | 3' 4" | 3' 6" | 2' 2" | 2' 3" | 2' 8" | 2' 10" |
| | m | 0.76 | 0.81 | 0.81 | 0.89 | 0.99 | 0.99 | 1.03 | 1.08 | 0.66 | 0.70 | 0.81 | 0.86 |

AREA

| | | | | | | | | | | | | | |
|---------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| INTERNAL AREA | sq.ft. | 17.26 | 20.05 | 22.67 | 25.87 | 31.97 | 35.17 | 39.36 | 44.76 | 12.72 | 14.32 | 19.01 | 21.94 |
| | m2 | 1.60 | 1.86 | 2.11 | 2.40 | 2.97 | 3.27 | 3.66 | 4.16 | 1.18 | 1.33 | 1.77 | 2.04 |

MAX TUBE DIAMETER

| | | | | | | | | | | | | | |
|--|-------|------|------|------|------|------|------|------|------|------|------|------|------|
| | ft/in | 17" | 17" | 17" | 18" | 18" | 19" | 19" | 20" | 16" | 16" | 17" | 17" |
| | m | 0.43 | 0.43 | 0.43 | 0.46 | 0.46 | 0.48 | 0.48 | 0.51 | 0.40 | 0.40 | 0.43 | 0.43 |

NUMBER OF CHAMBERS

| | | | | | | | | | | | | | |
|--|--|---|---|---|---|---|---|---|---|---|---|---|---|
| | | 3 | 3 | 3 | 3 | 3 | 4 | 5 | 5 | 2 | 2 | 3 | 3 |
|--|--|---|---|---|---|---|---|---|---|---|---|---|---|

CAPACITY

| | | | | | | | | | | | | | |
|---------|-----|------|------|------|------|------|------|------|------|-----|------|------|------|
| PERSONS | | 5 | 5 | 6 | 6 | 7 | 8 | 9 | 10 | 4 | 4 | 5 | 4 |
| PAYLOAD | lbs | 1404 | 1519 | 1644 | 2032 | 2092 | 2391 | 2607 | 2709 | 882 | 1036 | 1300 | 1344 |
| | kg | 637 | 689 | 746 | 922 | 949 | 1085 | 1183 | 1229 | 400 | 470 | 590 | 610 |

WEIGHT

| | | | | | | | | | | | | | |
|--|-----|----|-----|-----|-----|-----|-----|-----|-----|----|----|----|-----|
| | lbs | 95 | 117 | 172 | 198 | 220 | 246 | 271 | 348 | 68 | 75 | 95 | 273 |
| | kg | 43 | 53 | 78 | 90 | 100 | 112 | 123 | 158 | 31 | 34 | 43 | 124 |

ENGINE

| | | | | | | | | | | | | | |
|--------------|-----|------|------|------|------|------|------|------|------|------|------|------|------|
| RECOMMENDED | hp | 8 | 10 | 15 | 25 | 25 | 30 | 30 | 30 | 4 | 6 | 8 | 25 |
| | kW | 6.0 | 7.5 | 11.2 | 18.7 | 18.7 | 22.4 | 22.4 | 22.4 | 3.0 | 4.5 | 6.0 | 18.7 |
| MAX | hp | 15 | 20 | 20 | 30 | 30 | 40 | 40 | 50 | 5 | 8 | 9.9 | 30 |
| | kW | 11.2 | 14.9 | 14.9 | 22.4 | 22.4 | 29.8 | 29.8 | 37.3 | 3.8 | 6.0 | 7.4 | 22.4 |
| SHAFT LENGTH | in | 15 | 15 | 20 | 20 | 20 | 20 | 20 | 20 | 15 | 15 | 15 | 20 |
| | cm | 38.1 | 38.1 | 50.8 | 50.8 | 50.8 | 50.8 | 50.8 | 50.8 | 38.1 | 38.1 | 38.1 | 50.8 |
| MAX WEIGHT | lbs | 121 | 132 | 132 | 183 | 183 | 242 | 242 | 253 | 62 | 106 | 106 | 183 |
| | kg | 55 | 60 | 60 | 83 | 83 | 110 | 110 | 115 | 28 | 48 | 48 | 83 |

BUILT-IN TANKS

| | | | | | | | | | | | | | |
|-------|-----|--|--|--|--|--|--|--|--|--|--|--|--|
| GAS | gal | | | | | | | | | | | | |
| | lt | | | | | | | | | | | | |
| WATER | gal | | | | | | | | | | | | |
| | lt | | | | | | | | | | | | |

STOWED DIMENSIONS

| | | | | | | | | | | | | | |
|---------------------------|------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| (LENGTH x WIDTH x HEIGHT) | inch | 105x44x19 | 119x44x19 | 132x44x19 | 138x46x26 | 144x47x32 | 159x47x32 | 167x47x32 | 182x55x32 | 91x44x19 | 96x44x19 | 119x44x19 | 125x43x37 |
| | cm | 266x113x47 | 302x113x47 | 334x113x47 | 350x116x65 | 365x120x82 | 405x120x82 | 425x120x82 | 463x140x82 | 231x113x47 | 245x113x47 | 302x113x47 | 315x110x94 |

RDC DESIGN CATEGORY

| | | | | | | | | | | | | | |
|--|--|---|---|---|---|---|---|---|---|---|---|---|---|
| | | C | C | C | C | C | C | C | C | C | C | C | C |
|--|--|---|---|---|---|---|---|---|---|---|---|---|---|

- STANDARD FEATURES
- OPTIONAL FEATURES

(*) COMES WITH FOUR LIFTING RINGS IF ORDERED WITH BOW LOCKER OPTION



EVERY AB INFLATABLE BOAT IS BACKED BY A TEN-YEAR LIMITED WARRANTY. SEE YOUR DEALER FOR DETAILS.

ISO 9001
BUREAU VERITAS
Certification



MMMA
CERTIFIED
www.mmma.eu



Céproof
www.ceproof.com



features



nautilus

| 11 DLX | 12 DLX | 13 DLX | 14 DLX | 15 DLX | 17 DLX WIDEBODY BOWRIDER | 19 DLX WIDEBODY BOWRIDER | 19 DLX-I/O WIDEBODY BOWRIDER*** |
|--------|--------|--------|--------|--------|--------------------------------|--------------------------------|---------------------------------------|
|--------|--------|--------|--------|--------|--------------------------------|--------------------------------|---------------------------------------|



oceanus

| 11 VST | 12 VST | 13 VST | 14 VST | 15 VST | 19 VST | 24 VST BOWRIDER* | 28 VST** |
|--------|--------|--------|--------|--------|--------|---------------------|----------|
|--------|--------|--------|--------|--------|--------|---------------------|----------|

| | | | | | | | | | | | | | | | | |
|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| BENCH SEAT WITH STORAGE | | | | | | | | | | | | | | | | |
| BIMINI | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| BOW EYE | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| BOW HATCH CUSHION | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| BOW RAILS - STAINLESS STEEL | ● | ● | ● | ● | ● | ● | ● | ● | | | | | | | | |
| BOW SEAT WITH STORAGE | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| BOW SEATING W/UPHOLSTERED BACK SUPPORT | ● | ● | ● | ● | ● | ● | ● | ● | | | | | | | | |
| BOW STEP W/STAINLESS STEEL FOLD DOWN CLEAT | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| BOWRIDER SEATING STYLE | | | | | | ● | ● | ● | | | | | | | ● | |
| CHOCK SET | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| CLEATS (FOLD DOWN) - STAINLESS STEEL | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| CONSOLE (LOW PROFILE) | | | | | | | | | | | | | | | | |
| CONSOLE GRAB HANDLE - STAINLESS STEEL | ● | ● | ● | ● | ● | ● | ● | ● | | | | | | | | |
| CONSOLE W/ FORWARD SEAT, WINDSHIELD & SS GRAB RAIL | | | | | | | | | | | ● | ● | ● | ● | ● | ● |
| CONSOLE W/WINDSHIELD & SS GRAB RAIL WITHOUT FWD SEAT | | | | | | | | | ● | ● | | | | | | |
| CONSOLE W/ FWD & LAT SEAT, WINDSHIELD & SS GRAB RAIL | | | | | | | | | | | ○ | ○ | ○ | | | |
| COOLER WITH DRAIN (BUILT-IN) | 1 | 1 | 1 | 2 | 2 | 4 | 4 | 4 | | | | | | | | |
| DAVIT LIFTING RINGS | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 4 | 4 | 4 | 4 | 4 | 4 | | |
| FRESH WATER TANK W/ SHOWER SYSTEM | | | | ● | ● | ● | ● | ● | | | | | | ● | ● | ● |
| FUEL TANK (UNDERDECK) - ALUMINUM | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| GRAB HANDLES ON TUBES - STAINLESS STEEL | | | | | | | | | ● | ● | ● | ● | ● | ● | | |
| HAND PUMP/ REPAIR KIT | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| HELM SEAT - STAINLESS STEEL | | | | | | | | | | | | | | | | |
| JOCKEY CONSOLE (2 PERSON) | | | | | | | | | | | | | | | | |
| LEANING BOLSTER | | | | | | | | | | | | | | ● | ● | ● |
| LIGHT ARCH | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| NAVIGATION AND ANCHOR LIGHTS | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| NON SKID - RUBBER PANELS | | | | | | | | | | | | | | | | |
| NON SKID DECK - DIAMOND SHAPE | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| GAS SPRINGS - STAINLESS STEEL | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| OARS & OARLOCKS | | | | | | | | | | | | | | | | |
| PADDLES | | | | | | | | | | | | | | | | |
| SEAT (REMOVABLE) | | | | | | | | | | | | | | | | |
| SELF BAILING DECK | | | | | | | ● | ● | | | | | | | | |
| SIDE STEP W/STAINLESS STEEL FOLD DOWN CLEAT | | | | | | | | | | | | | | | | |
| SUNBATHING BED | | | | | | ● | ● | ● | | | | | | | | |
| TIE DOWN EYES | ● | ● | ● | ● | ● | ● | ● | ● | | | | | | | | |
| TOWING RINGS - BOW | | | | | | | | | | | | | | | | |
| TOWING RINGS - STERN | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| TRANSOM LADDER | | | | ○ | ○ | ○ | ○ | ○ | | | | | ○ | ○ | ○ | ○ |
| T - TOP | | | | | | | | | | | | | | ○ | ○ | ○ |
| TUBE CHAPS | | | | | | | | | | | | | | | | |
| HYDRAULIC STEERING SYSTEM | | | | ● | ● | ● | ● | ● | | | | | | ● | ● | ● |
| MECHANICAL STEERING SYSTEM | ● | ● | ● | | | | | | ● | ● | ● | ● | ● | | | |

BOAT SMART FROM THE START!
TAKE A BOATING EDUCATION COURSE, AND GET A VESSEL SAFETY CHECK FOR YOUR BOAT. FOR MORE INFORMATION CONTACT:
U.S. COAST GUARD AUXILIARY: (877) 875 6296, (800) 368 5647 OR WWW.CGAUX.ORG / U.S. POWER SQUADRONS: (888) 367 8777 OR WWW.USPS.ORG
REMEMBER: BE SURE THERE IS A PERSONAL FLOTATION DEVICE (PFD) FOR YOU AND EACH OF YOUR PASSENGERS. WE RECOMMEND THE USE OF PFDs DURING ALL BOAT OPERATIONS. PFDs SHOULD BE WORN BY EVERY ONE ON BOARD AT ALL TIMES.

REMEMBER: ALWAYS ATTACH THE STOP-SWITCH SAFETY LANYARD TO YOUR WRIST BEFORE STARTING THE MOTOR AND DURING BOAT OPERATION. BEFORE SETTING OUT, CHECK THAT THE STOP-SWITCH LANYARD IS WORKING PROPERLY AND SHUTS OFF THE ENGINE WHEN PULLED. FOR ADDITIONAL INFORMATION AND LISTING OF WORLDWIDE DEALERS, PLEASE VISIT OUR WEB SITE.

www.abinflatables.com

features



| | mares | | navigo | | | | | | ventus | | | | alumina | | | |
|--|--------|--------|--------|------|-------|-------|-------|-------|--------|------|-------|-------|---------|--------|--------|--------|
| | 10 VSX | 12 VSX | 8 VS | 9 VS | 10 VS | 12 VS | 13 VS | 14 VS | 8 VL | 9 VL | 10 VL | 12 VL | 10 ALX | 11 ALX | 12 ALX | 13 ALX |
| BENCH SEAT WITH STORAGE | | | | | ○ | ○ | ○ | ○ | | | | | ● | ● | ● | ● |
| BIMINI | | | | | | | | | | | | | ○ | ○ | ○ | ○ |
| BOW EYE | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| BOW HATCH CUSHION | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ | | | | | ● | ● | ● | ● |
| BOW RAILS - STAINLESS STEEL | | | | | | | | | | | | | | | | |
| BOW SEAT WITH STORAGE | ● | ● | ● | ● | ● | ● | ● | ● | | | | | ● | ● | ● | ● |
| BOW SEATING W/UPHOLSTERED BACK SUPPORT | | | | | | | | | | | | | | | | |
| BOW STEP W/STAINLESS STEEL FOLD DOWN CLEAT | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ● | ● | ● | ● |
| BOWRIDER SEATING STYLE | | | | | | | | | | | | | | | | |
| CHOCK SET | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| CLEATS (FOLD DOWN) - STAINLESS STEEL | | | | | | ○ | ○ | ○ | | | | | | 3 | 3 | 3 |
| CONSOLE (LOW PROFILE) | | | | | ○ | ○ | ○ | ○ | | | | | | | | |
| CONSOLE GRAB HANDLE - STAINLESS STEEL | ● | ● | | | | | | | | | | | ● | | | |
| CONSOLE W/ FORWARD SEAT, WINDSHIELD & SS GRAB RAIL | | | | | | ○ | ○ | ○ | | | | | | | | ● |
| CONSOLE W/WINDSHIELD & SS GRAB RAIL WITHOUT FWD SEAT | | | | | ○ | ○ | ○ | ○ | | | | | | ● | ● | |
| CONSOLE W/ FWD & LAT SEAT, WINDSHIELD & SS GRAB RAIL | | | | | | | | | | | | | | | | ○ |
| COOLER WITH DRAIN (BUILT-IN) | | | | | | | | | | | | | | | | |
| DAVIT LIFTING RINGS | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 3 | 3 | 3 | 4 | 4 | 4 | 4 |
| FRESH WATER TANK W/ SHOWER SYSTEM | | | | | | | | | | | | | | | | |
| FUEL TANK (UNDERDECK) - ALUMINUM | | | | | | | | | | | | | | | | |
| GRAB HANDLES ON TUBES - STAINLESS STEEL | | | | | | | | | | | | | | | | |
| HAND PUMP/ REPAIR KIT | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| HELM SEAT - STAINLESS STEEL | | | | | ○ | ○ | ○ | ○ | | | | | | | | |
| JOCKEY CONSOLE (2 PERSON) | | | | | ○ | ○ | ○ | ○ | | | | | | | | |
| LEANING BOLSTER | | | | | | | | | | | | | | | | |
| LIGHT ARCH | | | | | | | | | | | | | | | | |
| NAVIGATION AND ANCHOR LIGHTS | ● | ● | | | | | | | | | | | ● | ● | ● | ● |
| NON SKID - RUBBER PANELS | | | | | | | | | ● | ● | ● | ● | ● | ● | ● | ● |
| NON SKID DECK - DIAMOND SHAPE | ● | ● | ● | ● | ● | ● | ● | ● | | | | | | | | |
| GAS SPRINGS - STAINLESS STEEL | | | | | | | | | | | | | | | | |
| OARS & OARLOCKS | | | ● | ● | ● | | | | ● | ● | ● | | | | | |
| PADDLES | | | | | | ● | ● | ● | | | | ● | | | | |
| SEAT (REMOVABLE) | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | | |
| SELF BAILING DECK | | | | | | | | | | | | | | | | |
| SIDE STEP W/STAINLESS STEEL FOLD DOWN CLEAT | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | ● | ● | ● |
| SUNBATHING BED | | | | | | | | | | | | | | | | |
| TIE DOWN EYES | | | | | | | | | | | | | ● | ● | ● | ● |
| TOWING RINGS - BOW | ● | ● | ● | ● | ● | | | | ● | ● | ● | | | | | |
| TOWING RINGS - STERN | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | | | | | 2 | 2 | 2 | 2 |
| TRANSOM LADDER | | | | | | | | | | | | | | | | |
| T - TOP | | | | | | | | | | | | | | | | |
| TUBE CHAPS | | | ○ | ○ | ○ | ○ | | | ○ | ○ | ○ | ○ | | | | |
| HYDRAULIC STEERING SYSTEM | | | | | | | | | | | | | | | | |
| MECHANICAL STEERING SYSTEM | ● | ● | | | | | | | | | | | ● | ● | ● | ● |

- STANDARD FEATURES
- OPTIONAL FEATURES



EVERY AB INFLATABLE BOAT IS BACKED BY A TEN-YEAR LIMITED WARRANTY. SEE YOUR DEALER FOR DETAILS.



**lammina AL****lammina UL****ab rider**

| 14 ALX | 15 ALX | 16 ALX | 8 AL SUPERLIGHT | 9 AL SUPERLIGHT | 9.5 AL SUPERLIGHT | 10 AL SUPERLIGHT | 11 AL SUPERLIGHT | 12 AL SUPERLIGHT | 13 AL SUPERLIGHT | 14 AL SUPERLIGHT | 15 AL SUPERLIGHT | 16 AL SUPERLIGHT | 8 UL ULTRALIGHT | 9 UL ULTRALIGHT | 10 UL ULTRALIGHT | |
|--------|--------|--------|--------------------|--------------------|----------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|--------------------|--------------------|---------------------|---|
| ● | ● | ● | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | |
| ○ | ○ | ○ | | | | | | | | | | | | | | |
| ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| ● | ● | ● | | | | | | | | | | | | | | |
| ● | ● | ● | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | |
| ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | |
| 3 | 3 | 3 | | | | | ○ | ○ | ○ | ○ | ○ | ○ | | | | |
| | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | |
| ● | ● | ● | | | | | ○ | ○ | ○ | ○ | ○ | ○ | | | | |
| ○ | ○ | ○ | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | |
| 4 | 4 | 4 | 3 | 3-4 | 3-4 | 3-4 | 3-4 | 3-4 | 3-4 | 3-4 | 3-4 | 3-4 | 3 | 3 | 3 | 4 |
| | | | | | | | | | | | | | | | | |
| ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | |
| | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | |
| ● | ● | ● | | | | | | | | | | | | | | |
| ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | | | | | | | | | | | | | | | | ● |
| | | | ● | ● | ● | ● | | | | | | | ● | ● | ● | |
| | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | | |
| ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | |
| ● | ● | ● | | | | | ● | ● | ● | ● | ● | ● | | | | |
| ● | ● | ● | ● | ● | ● | ● | | | | | | | | | | |
| 2 | 2 | 2 | | | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | | | | 2 |
| | | | | | | | | | | | | | | | | |
| | | | ○ | ○ | ○ | ○ | ○ | | | | | | ○ | ○ | ○ | |
| ● | ● | ● | | | | | | | | | | | | | | ● |

**BOAT SMART FROM THE START!**

TAKE A BOATING EDUCATION COURSE, AND GET A VESSEL SAFETY CHECK FOR YOUR BOAT. FOR MORE INFORMATION CONTACT:
U.S. COAST GUARD AUXILIARY: (877) 875 6296, (800) 368 5647 OR WWW.CGAUX.ORG / U.S. POWER SQUADRONS: (888) 367 8777 OR WWW.USPS.ORG
REMEMBER: BE SURE THERE IS A PERSONAL FLOTATION DEVICE (PFD) FOR YOU AND EACH OF YOUR PASSENGERS. WE RECOMMEND THE USE OF PFDs DURING ALL BOAT OPERATIONS. PFDs SHOULD BE WORN BY EVERY ONE ON BOARD AT ALL TIMES.

REMEMBER: ALWAYS ATTACH THE STOP-SWITCH SAFETY LANYARD TO YOUR WRIST BEFORE STARTING THE MOTOR AND DURING BOAT OPERATION. BEFORE SETTING OUT, CHECK THAT THE STOP-SWITCH LANYARD IS WORKING PROPERLY AND SHUTS OFF THE ENGINE WHEN PULLED. FOR ADDITIONAL INFORMATION AND LISTING OF WORLDWIDE DEALERS, PLEASE VISIT OUR WEB SITE.

www.abinflatables.com