



INFLATABLE BOATS
2016





The best name you can put on an inflatable boat

The quality of Achilles CSM Fabric has such a great reputation in the inflatable industry that many other inflatable boat manufacturers around the world buy it from us to use on their boats. But we do not stop at producing our own tough, airtight fabric that is virtually impervious to the elements, oil, gasoline and abrasions. We take the extra time and expense to build in the finest safety and performance features other manufacturers do not, such as our exclusive 4-layer overlapped seam construction. We meticulously design all our boats to deliver unsurpassed performance while outfitting each one with a comprehensive array of quality standard features you will not find on other inflatables. When you compare the design and features of any Achilles boat with any competing model, you will understand why we own a well-deserved reputation for quality forged over 40 years.


With Achilles, quality doesn't stop with the sale. We provide both customers and dealers alike with comprehensive and responsive post-sales support in every aspect of Achilles ownership. Our customer and mobile friendly web site not only offers comprehensive information on our current models, but also on all Achilles boats produced since 1978.

When you choose an Achilles, you will come away with a high quality inflatable boat and an ongoing relationship with a company committed to its customers.




FULL FIVE-YEAR WARRANTY ON FABRIC AND SEAMS
We back our claim to having superior fabric and construction with a strong warranty commitment.

At Achilles, the process of providing boaters with the highest quality inflatable boats in the world begins with manufacturing our own industry-leading CSM fabric and ends with providing Achilles owners unsurpassed customer service.

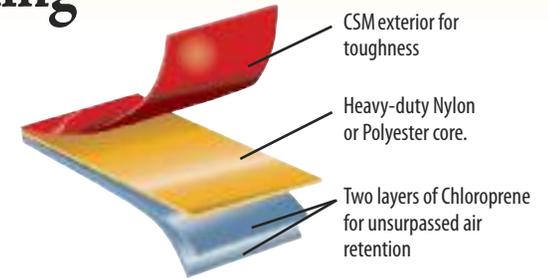


UNSURPASSED SEAM CONSTRUCTION



Our seams are overlapped a full inch and reinforced with seam tape both inside and out. No one else takes so many steps to ensure seams will last.

A SMOOTH, SIMPLE OAR SYSTEM



We invented the fold-down, locking oar system that makes rowing a breeze while keeping oars secured and out of the way when not in use.

NON-CORROSIVE CHECK VALVES



All Achilles valves are non-corrosive with no moving parts that might break. They are engineered for easy "one-way" inflation and instant deflation.

DINGHIES PAGE 3

SPORT TENDERS PAGES 4-8



LT SERIES

LS-RU SERIES

LEX SERIES

LSR-E SERIES

SPD-E SERIES

LSI-E SERIES

Great quality in compact packages that are easy to carry, store and inflate.

A functional, versatile, sporty lineup offering a variety of floor and design options.

Two new Aluminum Hull RIBs join the Achilles HB-AL Series for 2016! See page 9

NEW
HB-240AL



NEW
HB-270AL



HB-240AL



ACHILLES RIVERBOATS



Achilles produces a complete line of CSM riverboats. Call or email us for our riverboat brochure.

ACHILLES WORK AND RESCUE BOATS



Achilles produces heavy-duty workboats and rapid deployment rescue boats. Call or email us for our Commercial Boat brochure.

SPORT & UTILITY PAGES 13-16

RIGID HULLS PAGES 9-12



HB-AL SERIES

HB-FX SERIES

HB-LX SERIES

HB-DX SERIES



FRB SERIES

SGX SERIES

SG SERIES

SU SERIES

Choose from the industry's most complete lineup of open RIBs.

High performance inflatable boats for work, play and anything in between

LT

A lot of quality in a compact package.

These two and four person boats go from their handy carry bags to fully equipped dinghies in just minutes. Compact enough to be stored virtually anywhere, they are safe, durable and dependable dinghies capable of carrying substantial loads. They come fully equipped with fold-down oar system, wood seat, fold-up floor and motor mount. Even though they are our most economical boats, they are made with the same durable Achilles CSM fabric and four-layer seam construction, and backed by the same five-year warranty as our large sport boats.



	COLOR	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE DIAMETER	WEIGHT	LOAD CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MAXIMUM H.P.	AIR CHAMBERS
LT-2	Lt. Gray	7'3" (220 cm)	5' (153 cm)	4'1" (124 cm)	1'11" (58 cm)	13" (33 cm)	37 lbs (16.5 kg)	640 lbs (290 kg)	2	3 (2-3) Standard	3 Standard	2
LT-4	Lt. Gray	8'6" (260 cm)	6'2" (188 cm)	4'8" (142 cm)	2'2" (66 cm)	15" (38 cm)	57 lbs (26 kg)	970 lbs (440 kg)	4*	3 (2-3) Standard	3 Standard	2

LT STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; wood/Achilles CSM roll-up floor (LT4); hinged wood floor (LT2); full-length rubbing strake; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; bow D-ring (LT2); towing bridle D-rings (LT4); life lines with hand loops; removable wood rowing seat; motor mount; foot pump; carry bag; and maintenance kit. *SEE PAGE 17.

LS-RU

Unsurpassed convenience of a lightweight, roll-up tender.

Both our LS-RU rollup tenders can be stowed in a space just 10" high. With a roll-up wood/Achilles CSM fabric floor and solid transom, they can be inflated and ready to go in minutes. When they are, they deliver surprisingly large load and person capacities. Easy to carry, easy to set up, easy to store – the LS-RU.



	COLOR	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE DIAMETER	WEIGHT	LOAD CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MAXIMUM H.P.	AIR CHAMBERS
LS2-RU	Lt. Gray/Navy Blue	7'6" (228 cm)	5'1" (156 cm)	4'4" (132 cm)	2' (62 cm)	14" (35 cm)	57 lbs (25.5 kg)	620 lbs (280 kg)	2	4 (2-4) Standard	4 Standard	2
LS4-RU	Lt. Gray/Navy Blue	8'8" (265 cm)	6'1" (185 cm)	4'8" (142 cm)	2'2" (66 cm)	15" (38 cm)	66 lbs (30 kg)	840 lbs (380 kg)	4*	4 (2-6) Standard	6 Standard	2

LS-RU STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; wood/CSM roll-up floor; full-length rubbing strake; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; protective motor clamp plate; removable wood rowing seat; bailer valve; life lines; towing bridle D-rings; foot pump; carry bag; and maintenance kit.

These timeless tenders still offer boaters the classic inflatable look and functionality that has made them so popular.

LEX



LEX-88

LEX boats represent the culmination of many subtle refinements over the years that have kept them current while maintaining their traditional appearance. A sleek bow design and ample interior space come together in this classic tender. A teardrop rub strake deflects spray and improves protection from the inevitable collisions with docks and boat hulls.

Additional features include a painted wood seat and a full sectional wood floor. They all add up to a solid, reliable tender that combines practicality and performance in an economical package.



LEX-88

	COLOR	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE DIAMETER	WEIGHT	LOAD CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MAXIMUM H.P.	AIR CHAMBERS
LEX-77	Lt. Gray	7'7" (230 cm)	4'11" (149 cm)	4'9" (144 cm)	2'2" (66 cm)	15.5" (39 cm)	62 lbs (28 kg)	730 lbs (330 kg)	2	4 (2-4) Standard	4 Standard	2 & Keel
LEX-88	Lt. Gray	8'8" (265 cm)	5'11" (180 cm)	4'9" (144 cm)	2'2" (66 cm)	15.5" (39 cm)	69 lbs (31 kg)	900 lbs (410 kg)	4*	4 (2-6) Standard	6 Standard	2 & Keel
LEX-96	Lt. Gray	9'6" (290 cm)	6'9" (205 cm)	4'9" (144 cm)	2'2" (66 cm)	15.5" (39 cm)	74 lbs (33.5 kg)	990 lbs (450 kg)	4	6 (2-8) Standard	8 Standard	2 & Keel

LEX STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four layer seam construction; air keel; wood floorboards; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; full-length teardrop rubbing strake; removable wood rowing seat; foot pump; towing bridle D-rings; protective transom motor clamp plate; life lines; bailer valve; carry bag; and maintenance kit. *SEE PAGES 17 AND 18.

LSR-E

Our popular aluminum floor rollups have been redesigned to look and perform even better!

We've added a new, sleek lateral seam tube design to these super convenient boats that feature a unique aluminum rollup floor which makes it a snap to get them in and out of the water quickly and easily. This is combined with an inflatable keel and V-shaped fiberglass-encased transom to enhance performance. Large 17" tubes allow the LSR tenders to carry heavy loads. Add in the improved performance provided by the Performax end cone design, and you have a roll-up tender that is tough to beat.



LSR-290E



LSR-290E

	COLOR	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE DIAMETER	WEIGHT	LOAD CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MAXIMUM H.P.	AP CHAIRS
LSR-290E	Lt. Gray	9'6" (290 cm)	6'9" (205 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	97 lbs (44 kg)	1,100 lbs (500 kg)	4	6 (4-8) Standard	8 Standard	2 Keel
LSR-310E	Lt. Gray	10'2" (310 cm)	7'3" (220 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	101 lbs (46 kg)	1,190 lbs (540 kg)	4	8 (4-10) Standard	10 Standard	3 Keel

LSR STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; air keel; aluminum roll-up floor; fiberglass encased v-shaped transom; full length teardrop rubbing strake; bow carry handle; interior bow lifting D-ring; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; towing bridle D-rings; removable wood rowing seat; extra seat attachment patches; webbed passenger, helmsman, and rear carry handles; protective motor clamp plate; bailer valve; foot pump; carry bag; and maintenance kit.

SPD-E

This longtime lineup staple is now better than ever.



SPD-290E

We have never stopped making our SPD boats better which is why they have remained popular with boaters for so long. That commitment to innovation and improvement has continued with tube and floor design enhancements. New lateral seam tube construction gives these classic inflatables a more modern, stylish design. Rope life lines have been replaced with webbed handles and helmsman grip for a cleaner appearance. The three rear floorboards that bear the brunt of abuse are now aluminum to decrease maintenance and increase durability.

The classic features that make these boats so desirable remain such as large diameter tubes for greater load capacity and better performance, a removable wood rowing seat and an air keel/floor joint system that deliver a more rigid floor.



Performax end cones perform better with today's heavier 4-stroke motors.



SPD-290E

	COLOR	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE DIAMETER	WEIGHT	LOAD CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MAXIMUM H.P.	AIR CHAMBERS
SPD-290E	Lt. Gray	9'6" (290 cm)	6'9" (205 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	106 lbs (48 kg)	1100 lbs (500 kg)	4	6 (4-8) Standard	8 Standard	2 & Keel
SPD-310E	Lt. Gray	10'2" (310 cm)	7'3" (220 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	110 lbs (50 kg)	1190 lbs (540 kg)	4	8 (4-10) Standard	10 Standard	3 & Keel
SPD-330E	Lt. Gray	10'8" (325 cm)	7'5" (226 cm)	5'6" (168 cm)	2'7" (78 cm)	18" (45 cm)	120 lbs (54.5 kg)	1300 lbs (590 kg)	5	15 (4-20) Standard	20 Standard	3 & Keel

SPD STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; aluminum and wood floorboards; aluminum stringers and floorboard joints; air keel; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; bow carry handle; towing bridle D-rings; interior bow lifting D-ring; removable wood rowing seat with foam mat; extra seat attachment patches; webbed passenger, helmsman, and rear carry handles; full length teardrop rubbing strake; fiberglass coated v-shaped transom; bailer valve; foot pump; carry bag (2 bags for the SPD-330E); and maintenance kit.

LSI-E

The only inflatable tenders made with Achilles high pressure CSM-reinforced

The world's best high-pressure AirFirm™ floor tenders continue to lead the industry in innovation, styling and performance. The lateral seam tube design gives our LSI boats a sleek, clean, modern look. Achilles remains the only inflatable manufacturer with a CSM high-pressure air floor.

Our Achilles high pressure, CSM drop-stitch AirFirm™ floors continue to provide the industry's toughest air decks. When you consider the abuse floors take from scrapes, the sun, salt water, oil and gasoline, it makes sense to have the toughest material available to protect them. And besides being durable, their unique construction consisting of thousands of polyester threads makes these floors remarkably rigid and incredibly lightweight as well.



LSI-230E



LSI-260E

Achilles high-pressure CSM drop-stitch AirFirm™ floors provide superior rigidity.



LSI-260E

Airfirm™ floors are better than ever.

Performax end cones perform better with today's heavier 4-stroke motors.



LSI-290E



The result is not only a more stylish tender, but also one that outperforms other air floor models by a wide margin. The combination of Performax tubes engineered to work efficiently with today's heavier 4-stroke motors, air keel, and a stiffer air floor result in a smoother handling and better performing boat.



LSI-290E

	COLOR	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE DIAMETER	WEIGHT	LOAD CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MAXIMUM H.P.	AIR CHAMBERS
LSI-230E	Lt. Gray	7'7" (230 cm)	5'1" (155 cm)	4'9" (144 cm)	2'2" (66 cm)	15.5" (39 cm)	55 lbs (25 kg)	710 lbs (320 kg)	2	4 (2-4) Standard	4	2 & Keel & Floor
LSI-260E	White or Lt. Gray	8'6" (260 cm)	6'1" (185 cm)	4'9" (144 cm)	2'2" (66 cm)	15.5" (39 cm)	64 lbs (29 kg)	820 lbs (370 kg)	4*	4 (2-6) Standard	6	2 & Keel & Floor
LSI-290E	White or Lt. Gray	9'6" (290 cm)	6'9" (205 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	77 lbs (35 kg)	1120 lbs (510 kg)	4	6 (4-8) Standard	8	2 & Keel & Floor
LSI-310E	White or Lt. Gray	10'2" (310 cm)	7'3" (220 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	80 lbs (36.5 kg)	1210 lbs (550 kg)	4	8 (4-10) Standard	10	3 & Keel & Floor
LSI-330E	Lt. Gray	10'8" (325 cm)	7'5" (226 cm)	5'6" (168 cm)	2'7" (78 cm)	18" (45 cm)	86 lbs (39 kg)	1340 lbs (610 kg)	5	10 (4-15) Standard	15	3 & Keel & Floor
LSI-360E	Lt. Gray	11'10" (360 cm)	8'10" (268 cm)	5'6" (168 cm)	2'7" (78 cm)	18" (45 cm)	108 lbs (49 kg)	1520 lbs (690 kg)	6	20 (4-25) Standard	25	4 & Keel & Floor

LSI STANDARD FEATURES INCLUDE: Achilles CSM-reinforced fabric; four-layer seam construction; removable Achilles CSM high-pressure drop stitch air floor; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; full length teardrop rubbing strake; bow carry handle; towing bridle D-rings; interior bow lifting D-ring (except LSI-230E); removable wood rowing seat; bailer valve; high volume/high pressure foot pump with pressure gauge; protective pad for gas tank; fiberglass encased v-shaped transom (except LSI-230E which has a painted wood transom); air keel; extra seat attachment patches on LSI-290E, LSI-310E, LS-1330E and LSI-360E; webbed passenger, helmsman, and rear carry handles on LSI230E, LSI260E, LSI290E, and LSI310E; (LSI330E and LSI360E have molded rear carry handle, and LSI360E has a molded helmsman grip). *SEE PAGES 17 AND 18.

HB-AL

Our aluminum hull RIBs let you go anywhere.

**2 NEW models
for 2016!
HB-240AL & HB-270AL**

We've incorporated all the best features of our pacesetter HB fiberglass hull inflatable boats into the HB-AL series. These rugged boats feature a marine grade aluminum hull that is powder-coated to ensure a smooth, long lasting finish. They offer the advantage of being light-weight yet remarkably strong and durable. A modified V hull, combined with their light weight allow HB-AL boats to cut through water efficiently with less horsepower.

The HB-240AL and HB-270AL are single hull models that keeps the weight of both boats under 100 pounds. The HB-310AL incorporates an additional deck liner resulting in a more level surface allowing for ease in getting in and out of the boat. All models have nonskid panels for better traction, safety and comfort.

All of this is in addition to a host of other great features perfected by Achilles through our years as a leader in RIB design and inflatable boat technology.

The HB-AL boats are a great choice for boaters who want a fuel-efficient and well-performing RIB that can handle rocky coastlines, coral, frequent beaching and anything else you can throw at them.



HB270-AL



HB310-AL

	COLOR	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE DIAMETER	WEIGHT	WHP CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MINIMUM H.L.	AIR CHAMBERS
HB-240AL	Pearl Gray	7'10" (240 cm)	5'3" (160 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	88 lbs (40 kg)	880 lbs (400 kg)	3	6 (4-6) Standard	6 Standard	3
HB-270AL	Pearl Gray	8'10" (270 cm)	6'3" (190 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	98 lb (44.5 kg)	990 lbs (450 kg)	4	8 (4-8) Standard	8 Standard	3
HB-310AL	Pearl Gray	10'2" (310 cm)	7'3" (220 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	121 lb (55 kg)	1190 lbs (540 kg)	4	10 (4-15) Standard	15 Standard	3

HB-AL STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four layer seam construction; powder-coated aluminum hull with non-skid patches (HB-310AL has full deck liner); hull keel guard; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; interior oar straps (HB-310AL only); full length teardrop rubbing strake; towing bridle D-rings; welded bow eye; inside bow davit lifting eye; stern mounted davit lifting eyes; transom towing eyes; protective transom motor clamp plate; bow and stern carry handles; webbed passenger handles and helmsman handles; removable wood rowing seat (gray painted); extra seat attachment patches (except the HB-240AL); bailer valve; foot pump; and maintenance kit.

An innovative folding transom makes these lightweight RIBs the easiest to transport, carry, and launch.

HB-FX

The Achilles HB-FX boats feature a unique folding transom, lightweight design, and full-length carry bag that combine to make these rigid hull models the easiest to transport and launch. Despite their lighter weight, both these popular FX models offer large load capacities and the ability to carry four people. The Achilles HB-FX series offers boaters the most convenient RIBs available.



HB-300FX



HB-270FX



EASY TO FOLD AND STORE

	COLOR	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE DIAMETER	WEIGHT	LOAD CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MAXIMUM H.P.	# OF CHAMBERS
HB-270FX	Pearl Gray	8'10" (270 cm)	5'11" (180 cm)	5'1" (156 cm)	2'3" (70 cm)	17" (43 cm)	86 lbs (39 kg)	1010 lbs (460 kg)	4	6 (4-8) Standard	8 Standard	3
HB-300FX	Pearl Gray	9'10" (300 cm)	6'9" (205 cm)	5'4" (162 cm)	2'4" (72 cm)	18" (45 cm)	91 lbs (41.5 kg)	1260 lbs (570 kg)	4	8 (4-10) Standard	10 Standard	3

HB-FX STANDARD FEATURES INCLUDE: Pearl Gray Achilles CSM reinforced fabric; four-layer seam construction; modified "V" fiberglass hull; folding fiberglass encased transom; full length carry bag; full length teardrop rubbing strake; towing bridle D-rings; stainless steel bow eye; inside bow davit lifting eye; bow carry handle; webbed passenger, helmsman, and rear carry handles; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; interior oar straps (HB-300FX only); gas tank tie down hardware; protective transom motor clamp plate; removable wood rowing seat; extra seat attachment patches (HB-300FX only); bailer valve; foot pump; and maintenance kit.

HB-LX

A lightweight rigid hull series packed with high performance features.

The Achilles HB-LX boats provide the critically acclaimed performance of the Achilles DX deep "V" fiberglass hull design in a lighter RIB. They also have the same tube design as the DX series, yet a modification of the deck design and removing the bow locker results in a RIB that is on average 20% lighter than the same size DX model.

This means they can perform better with smaller engines and can be carried or transported more easily. Despite their lighter weight and lower cost compared to the HB-DX series, they are still loaded with all the high quality standard features for which Achilles is known.



HB280-LX



HB240-LX



HB350-LX

	COLOR	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE DIAMETER	WEIGHT	LOAD CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MAXIMUM W.A.	AIR CHAMBERS
HB-240LX	Pearl Gray	7'10" (240 cm)	5'8" (172 cm)	5' (153 cm)	2'5" (73 cm)	16" (40 cm)	86 lbs (39 kg)	900 lbs (410 kg)	3	5 (2-5) Standard	5 Standard	2
HB-280LX	Pearl Gray	9'2" (280 cm)	6'7" (201 cm)	5'5" (166 cm)	2'7" (80 cm)	17" (43 cm)	118 lbs (53.5 kg)	1210 lbs (550 kg)	4	8 (4-10) Standard	10 Standard	3
HB-315LX	Pearl Gray	10'4" (315 cm)	7'9" (235 cm)	5'5" (166 cm)	2'7" (80 cm)	17" (43 cm)	128 lbs (58 kg)	1320 lbs (600 kg)	5	10 (4-15) Standard	15 Standard	3
HB-350LX	Pearl Gray	11'6" (350 cm)	8'8" (264 cm)	5'9" (175 cm)	2'9" (85 cm)	18" (45 cm)	161 lbs (73 kg)	1680 lbs (760 kg)	6	15 (6-20) Standard	20 Standard	3

HB-LX STANDARD FEATURES INCLUDE: Pearl Gray Achilles CSM reinforced fabric; four-layer seam construction; deep "V" fiberglass hull; full length teardrop rubbing strake; removable wood rowing seat; towing bridle D-rings; stainless bow eye; lifting hardware for davits; bow carry handle; webbed passenger, helmsman, and rear carry handles; interior oar straps (except HB240-LX); fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; gas tank tie down hardware; protective transom motor clamp plate; extra seat attachment patches (except HB240-LX); bailer valve; foot pump; and maintenance kit.

HB-DX

These deluxe hard bottom inflatables offer boaters the best combination of style, performance, and functionality.



HB-280DX

Sleek, Euro-style tubes give them a stylish edge over other RIBs. A deep “V” fiberglass hull delivers superior performance while a built-in bow locker provides both a seat and a place for gear. If you want to take a step above the norm in a hard-bottomed tender, step up to an Achilles HB-DX RIB. Like every Achilles boat they are made with our own Achilles CSM fabric so they can handle the burning sun of the tropics or cold northern waters without fading or deteriorating. Choose a rigid-hulled inflatable that gives you a little extra. Choose an Achilles HB-DX.



Seat shown is optional



Seat and console shown are optional equipment



HB-350DX



HB-385DX



A deep “V” fiberglass hull takes Achilles RIBs to an even higher level of performance.

	COLOR	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE DIAMETER	WEIGHT	LOAD CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MAXIMUM H.P.	AIR CHAMBERS
HB-280DX	Pearl Gray	9'2" (280 cm)	6'7" (201 cm)	5'5" (166 cm)	2'7" (80 cm)	17" (43 cm)	148 lbs (67 kg)	1190 lbs (540 kg)	4	10 (4-15) Standard	15 Standard**	3
HB-315DX	Pearl Gray	10'4" (315 cm)	7'9" (235 cm)	5'5" (166 cm)	2'7" (80 cm)	17" (43 cm)	159 lbs (72 kg)	1300 lbs (590 kg)	5	15 (6-20) Standard	20 Standard	3
HB-350DX	Pearl Gray	11'6" (350 cm)	8'8" (264 cm)	5'9" (175 cm)	2'9" (85 cm)	18" (45 cm)	187 lbs (85 kg)	1650 lbs (750 kg)	6	20 (6-30) Long	30 Long	3
HB-385DX	Pearl Gray	12'8" (385 cm)	9'10" (300 cm)	5'11" (180 cm)	2'11" (90 cm)	18" (45 cm)	243 lbs (110 kg)	1790 lbs (810 kg)	7	30 (20-40) Long	40 Long	4

HB-DX STANDARD FEATURES INCLUDE: Pearl Gray Achilles CSM reinforced fabric; four-layer seam construction; deep “V” fiberglass hull; bow locker; double heavy duty full length teardrop rubbing strake; extra seat attachment patches; helmsman grip; removable wood rowing seat; towing bridle D-rings; stainless bow eye; lifting hardware for davits; molded rubber bow handle, carry handles, and helmsman grip; webbed passenger handles; interior oar straps; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders (HB-385DX has paddle); gas tank tie down hardware; protective transom motor clamp plate; bailer valve; foot pump; and maintenance kit. **SEE PAGE 18.

FRB

A versatile utility boat that's ready to go in minutes.

Designed originally as rapid response boats for fire departments and rescue units, these unique aluminum roll up floors with an innovative hinge system and non-skid panels can perform a variety of functions. They are easy to store or carry and can be set up in minutes. The main air chambers are equipped with over pressure relief valves so they can be inflated either by compressed air bottles or the standard equipment foot pump.

In addition to their Achilles CSM fabric and four-layer seam construction, other special features like abrasion wear patches and removable storage bags make them practical alternatives for tackling a range of jobs on the water.



FRB-124



FRB-104

	COLOR	LENGTH	INSIDE LENGTH	BOW	INSIDE BOW	TUBE PERIMETER	WEIGHT	LOAD CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MAXIMUM H.P.	AIR CHAMBERS
FRB-104	Red	10'4" (315 cm)	7'3" (220 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	108 lbs (49 kg)	1210 lbs (550 kg)	4	10 (4-15) Standard	15 Standard	2 + Kee
FRB-124	Red	12'4" (375 cm)	8'11" (272 cm)	5'3" (161 cm)	2'6" (75 cm)	17" (43 cm)	154 lbs (70 kg)	1,480 lbs (670 kg)	5	15 (4-25) Standard	25 Standard	4 + Kee

FRB STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; deep "V" inflatable keel; aluminum roll-up floor with non-skid panels, fiberglass encased v-shaped transom with protective motor clamp plate; two (2) paddles with interior tie downs; towing bridle D-rings; two removable storage bags; full length splash guard with life lines; abrasion patches; five (5) interior tie-down D-rings; full-length teardrop rubbing strake; foot pump and maintenance kit. The FRB-104 has two (2) over pressure relief valves, four lift and carry handles, interior bow lifting D-ring and bailer valve. The FRB-124 has four (4) over pressure relief valves, six (6) lift and carry handles, two (2) bailer valves and heavy duty bailer sleeve.

SGX

These versatile sport boats are the perfect solution for a range of uses.



SGX-122

They are rugged and roomy so they can be put to the test as dive boats, heavy duty tenders or utility boats. Their sporty nature also makes them great runabouts that really perform thanks to their deep "V" inflatable keel and large tube diameters.

A range of quality features include a v-shaped fiberglass-encased transom and removable, dual position wood seat. Their Achilles CSM fabric and four-layer seam construction make these sport boats extremely tough... and tough to beat.

SGX-132



The aluminum floor and v-shaped fiberglass-encased transom enhance durability and performance, and decrease maintenance.

	COLOR	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE DIAMETER	WEIGHT	LOAD CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MAXIMUM H.L.	MAX. CHAIRS
SGX-122	Red/Gray	12'2" (365 cm)	8'10" (268 cm)	5'6" (168 cm)	2'7" (78 cm)	18" (45 cm)	167 lbs (76 kg)	1520 lbs (690 kg)	6	20 (6-35) Standard	3' Standard	4 & keel
SGX-132	Red/Gray	13'2" (400 cm)	9'4" (284 cm)	5'9" (175 cm)	2'9" (85 cm)	18" (45 cm)	187 lbs (85 kg)	1760 lbs (800 kg)	6	30 (9.9-40) Long	4' Long	4 & keel

SGX STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; aluminum and wood floorboards with aluminum stringer system; v-shaped fiberglass encased transom; full-length teardrop rubbing strake; deep "V" inflatable keel; towing bridle D-rings; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; bow handle; four (4) lift and carry handles; helmsman grip; two (2) bailer valves; gas tank tie downs; life lines; removable wood seat; extra seat attachment patches; high-volume foot pump; two carry bags; and maintenance kit.

SG

These “top-of-the-line” models continue to set the standard for inflatable sport boats.

Achilles SG boats offer a roomy, square bow configuration which provides room for extra gear, and an aluminum and fiberglass floor system* which delivers superior rigidity and durability. Achilles SG sport boats bring performance and practicality together for better diving, fishing, or all-around sport-boating pleasure. They are also perennial rescue and emergency boat favorites of fire departments, first responders and others around the world.

SG-140



SG-140

	COLOR	LENGTH	TUBE LENGTH	BOW	WIDE BEAM	TUBE DIAMETER	WEIGHT	LOAD CAPACITY	PERSON CAPACITY	RECOMMENDED H.P.	MAXIMUM H.P.	AIR CHAMBERS
SG-124	Red	12'4" (375 cm)	8'11" (272 cm)	5'3" (161 cm)	2'6" (75 cm)	17" (43 cm)	175 lbs (79.5 kg)	1460 lbs (660 kg)	5	20 (6-35) Standard	35 Standard	4 @ Keel
SG-140	Red	14' (425 cm)	10' (305 cm)	5'9" (175 cm)	2'9" (85 cm)	18" (45 cm)	226 lbs (102.5 kg)	1940 lbs (880 kg)	6	30 (9.9-50) Long	50 Long	4 @ Keel
SG-156	Red	15'6" (473 cm)	10'11" (333 cm)	6'3" (190 cm)	2'11" (90 cm)	20" (50 cm)	272 lbs (123.5 kg)	2800 lbs (1270 kg)	8	35 (9.9-55) Long	55 Long	5 @ Keel

SG STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; air keel; aluminum and fiberglass* floorboards with aluminum stringer system; fiberglass encased transom with protective motor clamp plate; fuel tank tie-downs; two (2) bailer valves; full-length teardrop rubbing strake; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders (except SG-156); bow carry handle; lift and carry handles; towing bridle D-rings; helmsman grip; full-length splash guard with life lines; removable wood seat (except SG-156); extra seat attachment patches; large, high-volume foot pump; double carry bag system; and maintenance kit.

*SG-124 floorboards are aluminum and wood.

SU

Built tough to work hard for rugged private and commercial use.



*Heavy-duty bailer
and aluminum-plated
transom*

SU-16



SU-16

*Seat and paddle shown
are optional equipment.*

	COLOR	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE DIAMETER	WEIGHT	LOAD CAPACITY	FUEL TANK CAPACITY	RECOMMENDED H.P.	PARAPHIM H.P.	AIR CHARGERS
SU-14	Gray/Black*	14' (425 cm)	9'4" (284 cm)	5'10" (178 cm)	2'8" (82 cm)	19" (48 cm)	280 lbs (127 kg)	2230 lbs (1010 kg)	6	35 (9.9-55) Long	55 Long	4 + Keel
SU-16	Gray, Black*	16' (488 cm)	10'10" (330 cm)	6'9" (206 cm)	3'3" (100 cm)	21" (53 cm)	371 lbs (168.5 kg)	3170 lbs (1440 kg)	9	40 (20-75) Long	75 Long	5 + Keel
SU-18	Gray, Black*	18' (549 cm)	12' (366 cm)	7'7" (230 cm)	3'7" (110 cm)	24" (60 cm)	433 lbs (196 kg)	4,630 lbs (2,100 kg)	11	50 (25-90) Long	90 Long	5 + Keel

SU STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; extra durable double layer (840 denier each) nylon core fabric; air keel; aluminum and fiberglass floorboards and heavy duty aluminum stringer system; fiberglass encased transom with aluminum plate and motor pad; fuel tank tie-downs; heavy duty bailer sleeve and two (2) bailer valves; extra-wide, heavy-duty, full-length teardrop rubbing strake; tie-down straps for paddles; bow handle; towing bridle D-rings; lift and carry handles; splash guard with life lines; heavy-duty reinforced cargo wear patch all around; extra tie-down D-rings; heavy duty recessed valves; heavy duty lifting points (hull and transom); two (2) high-volume large foot pumps; and maintenance kit.

*INTERNATIONAL ORANGE AVAILABLE AS SPECIAL ORDER ONLY

SPECIFICATIONS 2016 ACHILLES BOATS

NEW for 2016
NEW

MODEL	DINGHIES				SPORT TENDERS														HB-240AL	HB-270AL
	LT-2	LT-4	LS2-RU	LS4-RU	LEX-77	LEX-88	LEX-96	LSR-290E	LSR-310E	SPD-290E	SPD-310E	SPD-330E	LSI-230E	LSI-260E	LSI-290E	LSI-310E	LSI-330E	LSI-360E		
LENGTH	7'3" (220 cm)	8'6" (260 cm)	7'6" (228 cm)	8'8" (265 cm)	7'7" (230 cm)	8'8" (265 cm)	9'6" (290 cm)	9'6" (290 cm)	10'2" (310 cm)	9'6" (290 cm)	10'2" (310 cm)	10'8" (325 cm)	7'7" (230 cm)	8'6" (260 cm)	9'6" (290 cm)	10'2" (310 cm)	10'8" (325 cm)	11'10" (360 cm)	7'10" (240 cm)	8'10" (310 cm)
INSIDE LENGTH	5' (153 cm)	6'2" (188 cm)	5'1" (156 cm)	6'1" (185 cm)	4'11" (149 cm)	5'11" (180 cm)	6'9" (205 cm)	6'9" (205 cm)	7'3" (220 cm)	6'9" (205 cm)	7'3" (220 cm)	7'5" (226 cm)	5'1" (155 cm)	6'1" (185 cm)	6'9" (205 cm)	7'3" (220 cm)	7'5" (226 cm)	8'10" (268 cm)	5'3" (160 cm)	6'3" (190 cm)
BEAM	4'1" (124 cm)	4'8" (142 cm)	4'4" (132 cm)	4'8" (142 cm)	4'9" (144 cm)	4'9" (144 cm)	4'9" (144 cm)	5'2" (158 cm)	5'2" (158 cm)	5'2" (158 cm)	5'2" (158 cm)	5'6" (168 cm)	4'9" (144 cm)	4'9" (144 cm)	5'2" (158 cm)	5'2" (158 cm)	5'6" (168 cm)	5'6" (168 cm)	5'2" (158 cm)	5'2" (158 cm)
INSIDE BEAM	1'11" (58 cm)	2'2" (66 cm)	2' (62 cm)	2'2" (66 cm)	2'2" (66 cm)	2'2" (66 cm)	2'2" (66 cm)	2'4" (72 cm)	2'4" (72 cm)	2'4" (72 cm)	2'4" (72 cm)	2'7" (78 cm)	2'2" (66 cm)	2'2" (66 cm)	2'4" (72 cm)	2'4" (72 cm)	2'7" (78 cm)	2'7" (78 cm)	2'4" (72 cm)	2'4" (72 cm)
TUBE DIAMETER	13" (33 cm)	15" (38 cm)	14" (35 cm)	15" (38 cm)	15.5" (39 cm)	15.5" (39 cm)	15.5" (39 cm)	17" (43 cm)	17" (43 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)	15.5" (39 cm)	15.5" (39 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)	18" (45 cm)	17" (43 cm)	18" (45 cm)
HP RATING <small>(Recommended/Range)</small>	3 (2-3) standard	3 (2-3) standard	4 (2-4) standard	4 (2-6) standard	4 (2-4) standard	4 (2-6) standard	6 (4-8) standard	6 (4-8) standard	8 (4-10) standard	6 (4-8) standard	8 (4-10) standard	15 (4-20) standard	4 (2-4) standard	4 (2-6) standard	6 (4-8) standard	8 (4-10) standard	10 (4-15) standard	20 (4-25) standard	6 (4-6) standard	8 (4-8) standard
MAX ENGINE WEIGHT	44 lbs (20 kg)	44 lbs (20 kg)	55 lbs (25 kg)	66 lbs (30 kg)	55 lbs (25 kg)	66 lbs (30 kg)	88 lbs (40 kg)	88 lbs (40 kg)	110 lbs (50 kg)	88 lbs (40 kg)	110 lbs (50 kg)	121 lbs (55 kg)	55 lbs (25 kg)	66 lbs (30 kg)	88 lbs (40 kg)	110 lbs (50 kg)	110 lbs (50 kg)	154 lbs (70 kg)	68 lb (30 kg)	88 lb (40 kg)
HULL WEIGHT	29 lbs (13 kg)	37 lbs (17 kg)	40 lbs (18 kg)	46 lbs (21 kg)	45 lbs (20.5 kg)	49 lbs (22 kg)	52 lbs (23.5 kg)	66 lbs (30 kg)	68 lbs (31 kg)	66 lbs (30 kg)	68 lbs (31 kg)	73 lbs (33 kg)	47 lbs (21.5 kg)	55 lbs (25 kg)	66 lbs (30 kg)	68 lbs (31 kg)	73 lbs (33 kg)	86 lbs (39 kg)	88 lbs (40 kg)	98 lbs (44.5 kg)
FLOOR WEIGHT	8 lbs (3.5 kg)	20 lbs (9 kg)	17 lbs (7.5 kg)	20 lbs (9 kg)	17 lbs (7.5 kg)	20 lbs (9 kg)	22 lbs (10 kg)	31 lbs (14 kg)	33 lbs (15 kg)	40 lbs (18 kg)	42 lbs (19 kg)	47 lbs (21.5 kg)	8 lbs (3.5 kg)	9 lbs (4 kg)	11 lbs (5 kg)	12 lbs (5.5 kg)	13 lbs (6 kg)	22 lbs (10 kg)	—	—
BOAT WEIGHT	37 lbs (16.5 kg)	57 lbs (26 kg)	57 lbs (25.5 kg)	66 lbs (30 kg)	62 lbs (28 kg)	69 lbs (31 kg)	74 lbs (33.5 kg)	97 lbs (44 kg)	101 lbs (46 kg)	106 lbs (48 kg)	110 lbs (50 kg)	120 lbs (54.5 kg)	55 lbs (25 kg)	64 lbs (29 kg)	77 lbs (35 kg)	80 lbs (36.5 kg)	86 lbs (39 kg)	108 lbs (49 kg)	88 lbs (40 kg)	98 lbs (44.5 kg)
ACCESSORIES WEIGHT	12 lbs (5.5 kg)	17 lbs (7.5 kg)	12 lbs (5.5 kg)	12 lbs (5.5 kg)	15 lbs (7 kg)	12 lbs (5.5 kg)	12 lbs (5.5 kg)	18 lbs (8 kg)	18 lbs (8 kg)	18 lbs (8 kg)	18 lbs (8 kg)	19 lbs (8.5 kg)	17 lbs (7.5 kg)	17 lbs (7.5 kg)	18 lbs (8 kg)	18 lbs (8 kg)	18 lbs (8 kg)	18 lbs (8 kg)	14 lbs (6.5 kg)	14 lbs (6.5 kg)
TOTAL WEIGHT	49 lbs (22 kg)	74 lbs (33.5 kg)	69 lbs (31 kg)	78 lbs (35.5 kg)	77 lbs (35 kg)	81 lbs (36.5 kg)	86 lbs (39 kg)	115 lbs (52 kg)	119 lbs (54 kg)	123 lbs (56 kg)	128 lbs (58 kg)	139 lbs (63 kg)	72 lbs (32.5 kg)	80 lbs (36.5 kg)	95 lbs (43 kg)	98 lbs (44.5 kg)	104 lbs (47 kg)	126 lbs (57 kg)	102 lbs (46.5 kg)	112 lbs (51 kg)
LOAD CAPACITY	640 lbs (290 kg)	970 lbs (440 kg)	620 lbs (280 kg)	840 lbs (380 kg)	730 lbs (330 kg)	900 lbs (410 kg)	990 lbs (450 kg)	1100 lbs (500 kg)	1190 lbs (540 kg)	1100 lbs (500 kg)	1190 lbs (540 kg)	1300 lbs (590 kg)	710 lbs (320 kg)	820 lbs (370 kg)	1120 lbs (510 kg)	1210 lbs (550 kg)	1340 lbs (610 kg)	1520 lbs (690 kg)	880 lbs (400 kg)	990 lbs (450 kg)
PERSON CAPACITY	2	4*	2	4*	2	4*	4	4	4	4	4	5	2	4*	4	4	5	6	3	4
NO. OF AIR CHAMBERS	2	2	2	2	2 & keel	2 & keel	2 & keel	2 & keel	3 & keel	2 & keel	3 & keel	3 & keel	2 & keel & floor	2 & keel & floor	2 & keel & floor	3 & keel & floor	3 & keel & floor	4 & keel & floor	3	3
STOWED DIMENSIONS	3'3"x1'6"x9" (100 x 46 x 24)	3'3"x1'6"x1'1" (100 x 46 x 31)	3'5"x1'10"x10" (103 x 55 x 26)	3'5"x1'10"x10" (103 x 55 x 26)	3'5"x1'8"x11" (105 x 52 x 28)	3'4"x1'11"x11" (102 x 59 x 28)	3'5"x2'1"x11" (105 x 63 x 28)	3'9"x2'1"x13" (115 x 63 x 39)	3'9"x2'1"x13" (115 x 63 x 39)	3'9"x1'8"x11" (115 x 52 x 34)	3'9"x1'11"x11" (115 x 58 x 34)	B-4'1"x1'11"x10" (125 x 58 x 26)	3'5"x1'10"x11" (105 x 55 x 27)	3'5"x1'10"x11" (105 x 55 x 28)	3'9"x1'10"x1' (115 x 55 x 30)	4'2"x1'11"x1' (128 x 58 x 30)	4'1"x1'11"x10" (125 x 58 x 26)	4'2"x2'x12" (128 x 60 x 35)	6'9"x3'4"x1'5" (210 x 103 x 44)	7'8"x3'4"x1'5" (238 x 103 x 44)

THE MAXIMUM HP RATING, PERSON CAPACITY AND LOAD CAPACITY HAVE BEEN CALCULATED ACCORDING TO THE STANDARDS OF ISO6185.

*3 PERSON CAPACITY ACCORDING TO NMMA CERTIFICATION STANDARDS. PERSONS OPERATING BOATS ALONE SHOULD EXERCISE CAUTION

RIGID HULLS											SPORT AND UTILITY										MODEL	
HB310-AL	HB270-FX	HB300-FX	HB240-LX	HB280-LX	HB315-LX	HB350-LX	HB280-DX	HB315-DX	HB350-DX	HB385-DX	FRB-104	FRB-124	SGX-122	SGX-132	SG-124	SG-140	SG-156	SU-14	SU-16	SU-18		
10'2" (310 cm)	8'10" (270 cm)	9'10" (300 cm)	7'10" (240 cm)	9'2" (280 cm)	10'4" (315 cm)	11'6" (350 cm)	9'2" (280 cm)	10'4" (315 cm)	11'6" (350 cm)	12'8" (385 cm)	10'4" (315 cm)	12'4" (375 cm)	12'2" (365 cm)	13'2" (400 cm)	12'4" (375 cm)	14' (425 cm)	15'6" (473 cm)	14' (425 cm)	16' (488 cm)	18' (549 cm)		LENGTH
7'3" (220 cm)	5'11" (180 cm)	6'9" (205 cm)	5'8" (172 cm)	6'7" (201 cm)	7'9" (235 cm)	8'8" (264 cm)	6'7" (201 cm)	7'9" (235 cm)	8'8" (264 cm)	9'10" (300 cm)	7'3" (220 cm)	8'11" (272 cm)	8'10" (268 cm)	9'4" (284 cm)	8'11" (272 cm)	10' (305 cm)	10'11" (333 cm)	9'4" (284 cm)	10'10" (330 cm)	12' (366 cm)		INSIDE LENGTH
5'2" (158 cm)	5'1" (156 cm)	5'4" (162 cm)	5' (153 cm)	5'5" (166 cm)	5'5" (166 cm)	5'9" (175 cm)	5'5" (166 cm)	5'5" (166 cm)	5'9" (175 cm)	5'11" (180 cm)	5'2" (158 cm)	5'3" (161 cm)	5'6" (168 cm)	5'9" (175 cm)	5'3" (161 cm)	5'9" (175 cm)	6'3" (190 cm)	5'10" (178 cm)	6'9" (206 cm)	7'7" (230 cm)		BEAM
2'4" (72 cm)	2'3" (70 cm)	2'4" (72 cm)	2'5" (73 cm)	2'7" (80 cm)	2'7" (80 cm)	2'9" (85 cm)	2'7" (80 cm)	2'7" (80 cm)	2'9" (85 cm)	2'11" (90 cm)	2'4" (72 cm)	2'6" (75 cm)	2'7" (78 cm)	2'9" (85 cm)	2'6" (75 cm)	2'9" (85 cm)	2'11" (90 cm)	2'8" (82 cm)	3'3" (100 cm)	3'7" (110 cm)		INSIDE BEAM
17" (43 cm)	17" (43 cm)	18" (45 cm)	16" (40 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)	18" (45 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)	18" (45 cm)	17" (43 cm)	18" (45 cm)	20" (50 cm)	19" (48 cm)	21" (53 cm)	24" (60 cm)		TUBE DIAMETER
10 (4-15) standard	6 (4-8) standard	8 (4-10) standard	5 (2-5) standard	8 (4-10) standard	10 (4-15) standard	15 (6-20) standard	10 (4-15**) standard	15 (6-20) standard	20 (6-30) long	30 (20-40) long	10 (4-15) standard	15 (4-25) standard	20 (6-35) standard	30 (9.9-40) long	20 (6-35) standard	30 (9.9-50) long	35 (9.9-55) long	35 (9.9-55) long	40 (20-75) long	50 (25-90) long		HP RATING <small>(Recommended Range)</small>
110 lbs (50 kg)	88 lbs (40 kg)	110 lbs (50 kg)	66 lbs (30 kg)	110 lbs (50 kg)	110 lbs (50 kg)	121 lbs (55 kg)	110 lbs (50 kg)	121 lbs (55 kg)	172 lbs (78 kg)	209 lbs (95 kg)	110 lbs (50 kg)	154 lbs (70 kg)	176 lbs (80 kg)	209 lbs (95 kg)	176 lbs (80 kg)	243 lbs (110 kg)	265 lbs (120 kg)	265 lbs (120 kg)	353 lbs (160 kg)	375 lbs (170 kg)		MAX ENGINE WEIGHT
121 lbs (55 kg)	86 lbs (39 kg)	91 lbs (41.5 kg)	86 lbs (39 kg)	118 lbs (53.5 kg)	128 lbs (58 kg)	161 lbs (73 kg)	148 lbs (67 kg)	159 lbs (72 kg)	187 lbs (85 kg)	243 lbs (110 kg)	75 lbs (34 kg)	108 lbs (49 kg)	99 lbs (45 kg)	112 lbs (51 kg)	106 lbs (48 kg)	122 lbs (55.5 kg)	151 lbs (68.5 kg)	172 lbs (78 kg)	231 lbs (105 kg)	265 lbs (120 kg)		HULL WEIGHT
—	—	—	—	—	—	—	—	—	—	—	33 lbs (15 kg)	46 lbs (21 kg)	68 lbs (31 kg)	75 lbs (34 kg)	69 lbs (31.5 kg)	104 lbs (47 kg)	121 lbs (55 kg)	108 lbs (49 kg)	140 lbs (63.5 kg)	168 lbs (76 kg)		FLOOR WEIGHT
121 lbs (55 kg)	86 lbs (39 kg)	91 lbs (41.5 kg)	86 lbs (39 kg)	118 lbs (53.5 kg)	128 lbs (58 kg)	161 lbs (73 kg)	148 lbs (67 kg)	159 lbs (72 kg)	187 lbs (85 kg)	243 lbs (110 kg)	108 lbs (49 kg)	154 lbs (70 kg)	167 lbs (76 kg)	187 lbs (85 kg)	175 lbs (79.5 kg)	226 lbs (102.5 kg)	272 lbs (123.5 kg)	280 lbs (127 kg)	371 lbs (168.5 kg)	433 lbs (196 kg)		BOAT WEIGHT
14 lbs (6.5 kg)	17 lbs (7.5 kg)	17 lbs (7.5 kg)	11 lbs (5 kg)	12 lbs (5.5 kg)	12 lbs (5.5 kg)	13 lbs (6 kg)	12 lbs (5.5 kg)	12 lbs (5.5 kg)	13 lbs (6 kg)	13 lbs (6 kg)	20 lbs (9 kg)	20 lbs (9 kg)	21 lbs (9.5 kg)	25 lbs (11.5 kg)	20 lbs (9 kg)	20 lbs (9 kg)	15 lbs (7 kg)	7 lbs (3 kg)	7 lbs (3 kg)	7 lbs (3 kg)		ACCESSORIES WEIGHT
135 lbs (61.5 kg)	103 lbs (46.5 kg)	108 lbs (49 kg)	97 lbs (44 kg)	130 lbs (59 kg)	140 lbs (63.5 kg)	174 lbs (79 kg)	160 lbs (72.5 kg)	171 lbs (77.5 kg)	200 lbs (91 kg)	256 lbs (116 kg)	128 lbs (58 kg)	174 lbs (79 kg)	188 lbs (85.5 kg)	212 lbs (96.5 kg)	195 lbs (88.5 kg)	246 lbs (111.5 kg)	287 lbs (130.5 kg)	287 lbs (130 kg)	378 lbs (171.5 kg)	440 lbs (199 kg)		TOTAL WEIGHT
1190 lbs (540 kg)	1010 lbs (460 kg)	1260 lbs (570 kg)	900 lbs (410 kg)	1210 lbs (550 kg)	1320 lbs (600 kg)	1680 lbs (760 kg)	1190 lbs (540 kg)	1300 lbs (590 kg)	1650 lbs (750 kg)	1790 lbs (810 kg)	1210 lbs (550 kg)	1480 lbs (670 kg)	1520 lbs (690 kg)	1760 lbs (800 kg)	1460 lbs (660 kg)	1940 lbs (880 kg)	2800 lbs (1270 kg)	2230 lbs (1010 kg)	3170 lbs (1440 kg)	4630 lbs (2100 kg)		LOAD CAPACITY
4	4	4	3	4	5	6	4	5	6	7	4	5	6	6	5	6	8	6	9	11		PERSON CAPACITY
3	3	3	2	3	3	3	3	3	3	4	2 & keel	4 & keel	4 & keel	4 & keel	4 & keel	4 & keel	5 & keel	4 & keel	5 & keel	5 & keel		NO. OF AIR CHAMBERS
9'8"x3'5"x1'6" (295 x 105 x 46)	6'11"x3'5"x1'11" (210 x 105 x 33)	7'9"x3'5"x1'11" (235 x 105 x 33)	7'5"x3'5"x1'6" (225 x 105 x 46)	8'8"x3'5"x6" (265 x 105 x 46)	9'8"x3'5"x1'6" (295 x 105 x 46)	10'10"x3'7"x1'8" (330 x 110 x 51)	8'8"x3'5"x1'6" (265 x 105 x 46)	9'8"x3'5"x1'6" (295 x 105 x 46)	10'10"x3'7"x2'11" (330 x 110 x 63)	11'10"x3'11"x2'2" (360 x 120 x 65)	4'1"x2'1"x1'3" (125 x 63 x 39)	4'5"x2'6"x2' (135 x 75 x 60)	B-4'2"x2'x1' (128 x 60 x 30)	B-4'3"x2'x1'2" (130 x 61 x 35)	B-4'1"x2'2"x1'2" (125 x 67 x 36)	B-4'6"x2'2"x1'2" (137 x 67 x 36)	B-5'x2'4"x1'2" (152 x 71 x 36)	B-5'4"x2'5"x1'5" (162 x 74 x 42)	B-5'10"x2'10"x1'4" (178 x 87 x 40)	B-6'3"x3'3"x1'4" (190 x 98 x 40)		STOWED DIMENSIONS
												F-3'1"x2'2"x7" (93 x 67 x 17)	F-3'5"x2'5"x7" (105 x 74 x 17)	F-3'1"x2'2"x6" (93 x 67 x 16)	F-3'5"x2'6"x8" (104 x 75 x 20)	F-3'7"x2'6"x8" (110 x 76 x 20)	F-3'4"x2'6"x8" (101 x 75 x 20)	F-3'11"x2'9"x8" (120 x 85 x 20)	F-4'4"x3'1"x8" (133 x 95 x 20)			

WHEN USING MAXIMUM HP ENGINES.

**15 H.P. MAX. WITH REMOTE STEERING; 10 H.P. WITH TILLER STEERING



ACHILLES INFLATABLE BOATS

A Division of Achilles USA, Inc.

1407 80th Street SW
Everett, WA 98203
Email: boats@achillesusa.com
www.achillesboats.com

EAST COAST SALES OFFICE:
(252) 288-4387

WEST COAST SALES OFFICE:
(951) 587-8101

MANUFACTURED BY:
Achilles Corporation
21F, No. 2-21-1, Kitashinjuku
Shinjuku-ku
Tokyo, Japan 169-8885
Phone: (03) 5338-9363
Fax: (03) 3351-6963

EUROPEAN AGENT:
Wendt Agenturen B.V.
Achter de Watertoren 11
2182 DV Hillegom
The Netherlands
Phone: +31 (0) 252 516 938
Fax: +31 (0) 252 830 256
Email: info@achilles-wendt.com

NORWAY DISTRIBUTOR:
AS Kellox
Nygårdsveien 67
N-1401 Ski
Norway
Phone: (47) 64 97 61 00
Fax: (47) 64 97 6190
Email: achilles@kellox.no

AUSTRALIAN DISTRIBUTOR:
BURSILL SPORTSGEAR
(Holdings) Pty. Ltd.
16 Vine Street
Redfern N.S.W. 2016
Australia
Phone: (61) 2 9698 8022
Fax: (61) 2 9698 5708
Email: grahambursill@bigpond.com
www.inflatableboats.com.au



Achilles boats are certified by the National Marine Manufacturers Association as adhering to federal regulations and rigid industry standards established by the U.S. Coast Guard and the American Boat & Yacht Council. Achilles boats must pass rigorous annual inspections from independent third party inspectors to maintain this prestigious certification that guarantees our boats meet the highest safety and production standards. Achilles boats are also manufactured to meet or exceed ISO6185 standards.



Visit us on Facebook
[facebook.com/Achilles.Inflatable.Boats](https://www.facebook.com/Achilles.Inflatable.Boats)