


YACHTLINE 2012

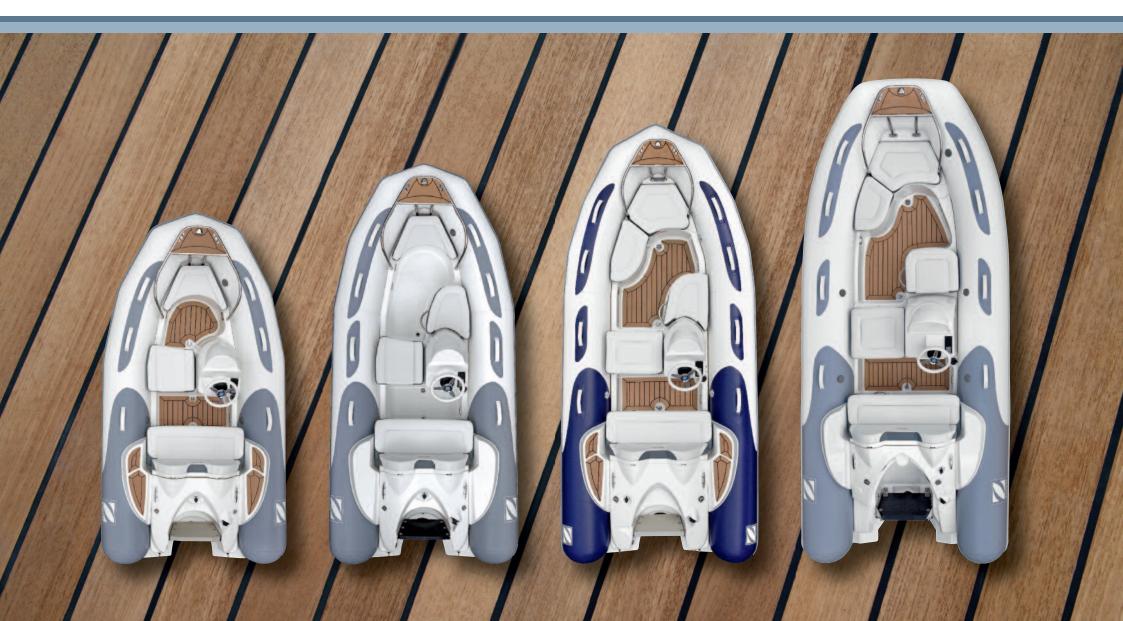

YACHTLINE

A natural complement to any yacht, the Zodiac® YACHTLINE range has been revisited to better satisfy your needs and to better fit your boat.

This new edition relies on comfort. In addition the new bow rail which is safe and convenient for mooring, combined with its new lateral teak covered step facilitates safe boarding.

While preserving the tender's compactness in order to occupy as little space as possible on your boat; the YACHTLINE interior layout has been designed to provide comfortable seating for all passengers.

The generous storage locker aperture provides easy access to the equipment that you have stored.

There are 3 new tube colors (grey, camel and navy blue) that provide you with the opportunity to harmonize your tender with your boat. These new tubes made of Hypalon™-Néoprène™ fabric provides a better resistance to UV radiation and to abrasion. In addition, tubes are fully removable which facilitate its maintenance.

The YACHTLINE will also fit your recreational activities (water-skiing, sports sailing, etc). Known for its great sea keeping qualities, the Yachtlines are quick to get on the plane thanks to their integral and patented Zodiac® flaps.





Bow rai



Storage with navigation lights holder





Confortable front seats



Large back seat









Confortable cockpit



Shower



+ POINTS

- New bow rail with teak covered step to provide safe boarding at the bow
 LED lights
- New teak covered lateral steps providing safe boarding at the stern of the boat
- New tubes design with 3 choices of colour (grey, camel, navy blue)
- Integral flaps facilitating quick planning of the boat (Zodiac® patent)
- Removable Hypalon[™]-Néoprène[™] buoyancy tubes
- Integral fuel tank
- Easy access to storage locker



HULL

- V-shaped fiberglass hull with built-in flaps (deep V on 470)
- Moulded non-skid deck
- Anchor locker with upholstered seat
- Rear locker with gas strut
- Lateral locker (420/470)
- 1 bow D-ring
- 2 stern rings

Height Hull angle

BUOYANCY TUBE

- marine blue / camel)
- Removable tube system

- Semi-recessed Easy Push valves
- Large profile rubbing strake
- Reinforced cone ends
- Interior handles (6 on 340, 8 on 380/420/

STANDARD EQUIPMENT

- Stainless steel bow rail
- Rear boarding steps
- - Steering wheel + steering system + cable
- Glove box
- Built-in fuel tank + gauge + fuel/water
- 35 litres / 9.2 US gal (340/380)

- 57 litres / 15 US gal (420)
- 85 litres / 22.5 US gal (470)
- Recess for extinguisher
- Double pilot/co-pilot seat with removable upholstered seat (340/380/420/470)
- Passenger seats with removable upholstered
- 4 stainless steel mooring cleats
- 3 lifting points
- Courtesy light
- 12-volt plug (470)
- Battery switch
- Battery box
- Automatic bilge pump
- 2 paddles

- Foot pump
- Pressure gauge
- Repair kit
- Owner's manual

MAIN OPTIONAL ACCESSORIES

- Lifting slings kit
- Overall cover
- Sundeck (470)
- Shower kit with 26 litres / 6.8 US gal (470)
- Picnic table (470)
- Ski mast (420/470)
- Side bathing ladder
- Synthetic teak deck
- Bow chocks

TECHNICAL





0,96 - 3'2"

18°




1,03 - 3'5"

18°



1,14 - 3'9"

21.5°



- (1) Maximum permitted load is calculated using ISO standards. Caution is advised when operating fully laden boats.
- (2) Recommended power is based on optimal use of the boat's abilities under average load. Depending on use, choose either maximum (waterskiing) or minimum power (fishing, cruising).
- (3) The manufacturer's plague specifies maximum permitted power. The power of your boat must not exceed this under any circumstances
- (4) Maximum permitted weight: dry weight, according to motor manufacturers' catalogue specifications.
- (5) Maximum speeds are intended as a guide only; they were measured in ideal conditions by professional pilots with one person aboard. They may vary according to make of motor, boat load, propeller type and water conditions.
- (6) Models in this catalogue are sometimes shown with optional accessories. Please check standard equipment supplied with each model and see your reseller for any additional equipment. The availability of certain models, as well as certain equipment details may vary from country to country (e.g. USA. Canada). The boats photographed in this catalogue may have undergone

Zodiac® continually strives to improve the quality of its products and as such reserves the right to modify or delete any model presented in this catalogue without prior notice. Zodiac® recommends to wear life jacket at all times; it is your own responsability to check the legal obligations on your navigation

This document may refer to trademarks belonging to other Companies. Such references are for identification only, and are not intended to be an endorsement. In a permanent concern of improvement of its products, Zodiac® 5 enoorsement. In a permanent may be made a permanent may be made a permanent may be made at any time, without any prior notification and no retroactive effect on the boats built previously. This document cannot be considered as a contractual document. Non contractual pictures. Attitudes and behaviours of the persons aboard the boats must not be considered as an example.

WWW.zodiacmarine.com



ODIAC	

SPECIFICATIONS

	340 DL	380 DL	420 DL	470 DL
DIMENSIONS (metres - feet/inches)				
Overall length	3,4 - 11'2"	3,8 - 12'6"	4,2 - 13'9"	4,7 - 15'5"
Inside length	2 - 6'7"	2,4 - 7'11"	2,8 - 9'2"	2,98 - 9'9"
Overall width	1,77 - 5'10"	1,77 - 5'10"	1,86 - 6'1"	2,05 - 6'9"
Inside width	0,86 - 2'10"	0,86 - 2'10"	0,94 - 3'1"	1,05 - 3'5"
Buoyancy tube diameter	0,455 - 1'6"	0,455 - 1'6"	0,455 - 1'6"	0,5 - 1'8"
CAPACITY				
Passengers (ISO)	4	5	6	9
Maximum payload ¹ (kg - lbs)	605 - 1333,8	735 - 1620,4	850 - 1873,9	945 - 2083,4
Total weight (kg - lbs)	193 - 425,5	218 - 480,6	273 - 601,9	390 - 859,8
Airtight compartments	3	3	3	5
DESIGN CATEGORY				
European directive N° 94/25/CE	С	С	С	С
OUTBOARD DATA				
Shaft: ■ long				
Minimum recommended power ² (Hp)	15	20	30	50
Minimum recommended power ² (kW)	12	15	23	38
Maximum recommended power ² (Hp)	30	30	50	70
Maximum recommended power ² (kW)	23	23	38	53
Maximum power allowed ³ (Hp)	30	40	50	90
Maximum power allowed ³ (kW)	23	30	38	68
Maximum weight of outboard ⁴ (kg - lbs)	100 - 220,5	110 - 242,5	120 - 264,6	170 - 374,8
Maximum speed⁵ (km/h - mph)	48 - 29,8	54 - 33,6	60 - 37,3	68 - 42,3
HULL STORAGE DIMENSIONS (metres - feet/inches)				
Length	3,18 - 10'5"	3,58 - 11'9"	3,98 - 13'1"	4,34 - 14'3"
Width	1,11 - 3'8"	1,11 - 3'8"	1,25 - 4'1"	1,38 - 4'6"

0,96 - 3'2"

18°