

# Octane


LED Tower/Spreader Light

## 1000 LUMEN WHITE LIGHT

Voltage: 10-30vDC 12vDC Amps: 1.3A 24vDC Amps: 600mA Color Temperature: 5000 Color Rendering Index: 70+

Rated Watts: 16

Water Ingress Rating: IP67

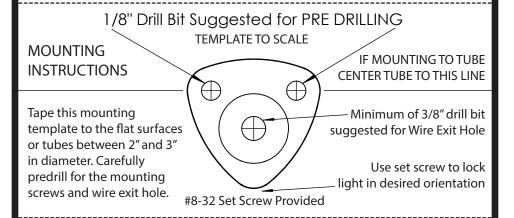

Lights should be installed by a qualified professional. Fuse lights appropriately for amperage draw. Use standard SPST "on/off" switch.

If mounting to tubing, be sure to align the mounting screws along the center axis of the tube.

Secure mounting bracket with provided #10 self-drilling fasteners. Drill a minimum of 3/8" diameter wire exit hole. Run power wires through mounting bracket and push light / ball joint assembly into mounting bracket. Locate the light in your desired orientation and locks it position using the provided set screw.

### 3 Year Limited Warranty See website for more warranty details. www.lumiteclighting.com

This product is warrantied to be free from defects in workmanship and materials for a period of three year from the date of original purchase. Should your Lumitec product prove defective during the warranty period promptly notify Lumitec and return product with freight prepaid. Lumitec will, at its option, repair or replace the product without charge for parts or labor, or refund purchase price. Products repaired or replaced under this warranty shall be warranted for the unexpired portion of the warranty applying to the original product(s). Lumitec is not responsible for product failure caused by abuse, neglect, improper installation, or failure in applications other than those for which it was designed, intended, and marketed. No warranty or affirmation of fact, express or implied, other than as set forth in the limited warranty statement above is made or authorized by Lumitec. Any liability for consequential and incidental damages is expressly disclaimed. Lumitec liability in all events is limited to, and shall not exceed, the purchase price paid



## Octane


LED Tower/Spreader Light

## 1000 LUMEN WHITE LIGHT

Voltage: 10-30vDC 12vDC Amps: 1.3A 24vDC Amps: 600mA Color Temperature: 5000 Color Rendering Index: 70+

Rated Watts: 16

Water Ingress Rating: IP67

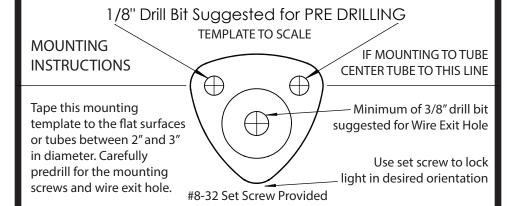

Lights should be installed by a qualified professional. Fuse lights appropriately for amperage draw. Use standard SPST "on/off" switch.

If mounting to tubing, be sure to align the mounting screws along the center axis of the tube.

Secure mounting bracket with provided #10 self-drilling fasteners. Drill a minimum of 3/8" diameter wire exit hole. Run power wires through mounting bracket and push light / ball joint assembly into mounting bracket. Locate the light in your desired orientation and locks it position using the provided set screw.

### 3 Year Limited Warranty See website for more warranty details. www.lumiteclighting.com

This product is warrantied to be free from defects in workmanship and materials for a period of three year from the date of original purchase. Should your Lumitec product prove defective during the warranty period promptly notify Lumitec and return product with freight prepaid. Lumitec will, at its option, repair or replace the product without charge for parts or labor, or refund purchase price. Products repaired or replaced under this warranty shall be warranted for the unexpired portion of the warranty applying to the original product(s). Lumitec is not responsible for product failure caused by abuse, neglect, improper installation, or failure in applications other than those for which it was designed, intended, and marketed. No warranty or affirmation of fact, express or implied, other than as set forth in the limited warranty statement above is made or authorized by Lumitec. Any liability for consequential and incidental damages is expressly disclaimed. Lumitec liability in all events is limited to, and shall not exceed, the purchase price paid