




1. Drill a hole with diameter of 1 $\frac{3}{16}$  inches




2a. Use the black sealing ring if mounting without plate

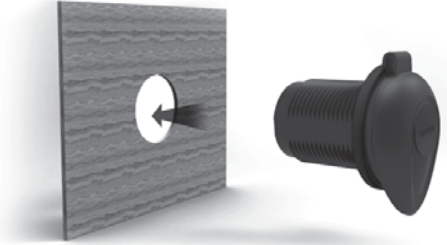

2b. Remove the black sealing ring if mounting with plate

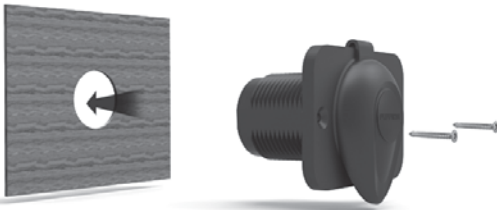


3. Screw nut securely on rear



4. Connect wires

- + Positive Red
- Negative Black



5.

