

## Mid Bulk Cable (Gray/Blue)



Mid bulk cable is primarily used as drop cable, but it can also be used at the trunk line depending on network power requirements. Bulk cable with field-attachable connectors allows for maximum flexibility as cables can be made on the job to exact lengths.

- Meets and exceeds NMEA 2000® specifications for the highest reliability
- Used with field-attachable connectors to build exact length cables at the job site
- Optimized for voltage drop sensitive networks (long runs) because power pair wires have half the resistance of Micro cable

## Mid Double-Ended Cordsets (Gray)



Double-ended cordsets are used for trunk or drop lines and make for a secure connection and simple timesaving installation. The connectors are keyed for error-free connection and are waterproof for continued operation even while submerged in the bilge.

- Rugged, IP68 rated connectors for continued connection integrity in marine environments
- Various cable lengths to match installation requirements
- Optimized for voltage drop sensitive networks (long runs) because power pair wires have half the resistance of Micro cable

## Mid Double-Ended Cordsets (Blue)




Double-ended cordsets are used for trunk or drop lines and make for a secure connection and simple timesaving installation. The connectors are keyed for error-free connection and are waterproof for continued operation even while submerged in the bilge.

- Rugged, IP68 rated connectors for continued connection integrity in marine environments
- Various cable lengths to match installation requirements
- Optimized for voltage drop sensitive networks (long runs) because power pair wires have half the resistance of Micro cable

Copyright 2015 Maretron, LLP. All rights reserved. As Maretron is constantly improving its products, all specifications are subject to change without notice. Maretron's products are designed to be accurate and reliable; however, they should be used only as aids to navigation and vessel monitoring, and not as a replacement for traditional navigation and vessel monitoring techniques. A prudent captain or navigator never relies on a single source for navigation or system monitoring information. "NMEA 2000" is a registered trademark of the National Marine Electronics Association.

## Mid Bulk Cable (Gray/Blue)

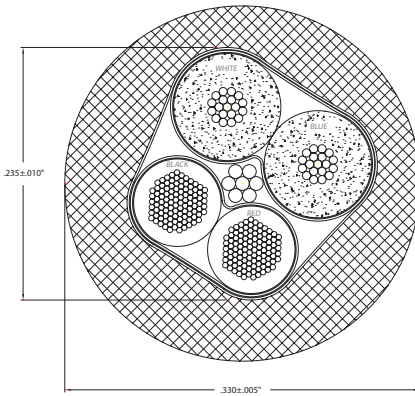


### Specifications

<b>OVERALL</b>	
Outer Jacket Mat/Color:	PVC/Gray – <b>DG1</b> PVC/Blue – <b>DB1</b>
Insulation Material:	PE (data wires), PVC (power wires)
Construction:	2x16 (1.29mm) AWG, 2x20 (0.81mm) AWG, 20 (0.81mm) AWG Drain Wire
Shielding (3 levels):	Foil (overall), Foil (power pair), Foil (data pair)
<b>POWER PAIR</b>	
Wire:	2x16 (1.29mm) AWG
Resistance/Conductor:	4.1 Ohms/1000 ft max
Max Amperage:	14 Amps
Color Code:	Red/Black
<b>DATA PAIR</b>	
Wire:	2x20 (0.81mm) (AWG)
Characteristic Impedance:	120 Ohms ± 10%
Capacitance:	10.75 pF/ft
Color Code:	White/Blue
<b>APPROVALS</b>	
UL:	PLTC 75°C Sunlight Resistant E90625, AWM 80°C 300V
CSA:	CMX-OUTDOOR-CMG LL54185 75°C, AWM I/II A/B 80C 300V FT4
NMEA:	NMEA 2000® Approved
IEC:	IEC-61162-3


### Products

PART NUMBER	DESCRIPTION
DG1	Mid Bulk Cable (per meter – gray) (no spool)
DG1-100	Mid Bulk Cable (Two Pieces per 100m spool – gray)
DG1-100C	Mid Bulk Cable (Single Piece per 100m spool – gray)
DB1	Mid Bulk Cable (per meter – blue) (no spool)
DB1-100	Mid Bulk Cable (Two Pieces per 100m spool – blue)
DB1-100C	Mid Bulk Cable (Single Piece per 100m spool – blue)


## Mid Double-Ended Cordsets (Gray)



MALE END VIEW



FEMALE END VIEW




### Specifications

<b>MECHANICAL</b>	
Contact Carrier Mat/Color:	Thermoplastic PUR/Blue-Gray
Molded Body Mat/Color:	Thermoplastic PUR/Blue-Gray
Contact Mat/Plating:	Brass/Gold
Coupling Nut Mat/Plating:	Brass/Nickel
Connector Outside Diameter:	0.59"
<b>ELECTRICAL</b>	
Current Rating:	4.0 Amps
Voltage Rating:	250 V
<b>CABLE</b>	
Outer Jacket Mat/Color:	PVC/Gray
Conductor Insulation Material:	PE (data pair), PVC (power pair)
Number of Conductors:	2x16 (1.29mm) AWG, Data 2x20 (0.81mm) AWG, 20 (0.81mm) AWG Drain Wire
Shielding (3 Levels):	Alum/Polyester Foil (Overall), Foil (Power Pair), Foil (Data Pair)
<b>ENVIRONMENTAL</b>	
Protection Class:	IEC IP68, NEMA 1,3,4,6P
Temperature Rating:	-40°C to 80°C to (-40°F to 176°F)
<b>APPROVALS</b>	
(Cable) UL:	PLTC 75°C Sunlight Resistant E90625, AWM 80°C 300V
(Cable) CSA:	CMX-OUTDOOR-CMG LL54185 75°C, AWM I/II A/B 80C 300V FT4
NMEA:	NMEA 2000® Approved
IEC:	IEC 61162-3


### Products

PART NUMBER	DESCRIPTION
DM-DG1-DF-00.5	Mid Double-Ended Cordset - M to F - 0.5M (gray)
DM-DG1-DF-01.0	Mid Double-Ended Cordset - M to F - 1M (gray)
DM-DG1-DF-02.0	Mid Double-Ended Cordset - M to F - 2M (gray)
DM-DG1-DF-03.0	Mid Double-Ended Cordset - M to F - 3M (gray)
DM-DG1-DF-04.0	Mid Double-Ended Cordset - M to F - 4M (gray)
DM-DG1-DF-05.0	Mid Double-Ended Cordset - M to F - 5M (gray)
DM-DG1-DF-06.0	Mid Double-Ended Cordset - M to F - 6M (gray)
DM-DG1-DF-08.0	Mid Double-Ended Cordset - M to F - 8M (gray)
DM-DG1-DF-10.0	Mid Double-Ended Cordset - M to F - 10M (gray)


## Mid Double-Ended Cordsets (Blue)



MALE END VIEW



FEMALE END VIEW



### Specifications

<b>MECHANICAL</b>	
Contact Carrier Mat/Color:	Thermoplastic PUR/Blue-Gray
Molded Body Mat/Color:	Thermoplastic PUR/Blue-Gray
Contact Mat/Plating:	Brass/Gold
Coupling Nut Mat/Plating:	Brass/Nickel
Connector Outside Diameter:	0.59"
<b>ELECTRICAL</b>	
Current Rating:	4.0 Amps
Voltage Rating:	250 V
<b>CABLE</b>	
Outer Jacket Mat/Color:	PVC/Blue
Conductor Insulation Material:	PE (data pair), PVC (power pair)
Number of Conductors:	2x16 (1.29mm) AWG, 2x20 (0.81mm) AWG, 20 (0.81mm) AWG Drain Wire
Shielding (3 Levels):	Foil (Overall), Foil (Power Pair), Foil (Data Pair)
<b>ENVIRONMENTAL</b>	
Protection Class:	IEC IP68, NEMA 1,3,4,6P
Temperature Rating:	-40°C to 80°C to (-40°F to 176°F)
<b>APPROVALS</b>	
(Cable) UL:	PLTC 75°C Sunlight Resistant E90625, AWM 80°C 300V
(Cable) CSA:	CMX-OUTDOOR-CMG LL54185 75°C, AWM I/II A/B 80C 300V FT4
NMEA:	NMEA 2000® Approved
IEC:	IEC 61162-3

### Products

PART NUMBER	DESCRIPTION
DM-DB1-DF-00.5	Mid Double-Ended Cordset - M to F - 0.5M (blue)
DM-DB1-DF-01.0	Mid Double-Ended Cordset - M to F - 1M (blue)
DM-DB1-DF-02.0	Mid Double-Ended Cordset - M to F - 2M (blue)
DM-DB1-DF-03.0	Mid Double-Ended Cordset - M to F - 3M (blue)
DM-DB1-DF-04.0	Mid Double-Ended Cordset - M to F - 4M (blue)
DM-DB1-DF-05.0	Mid Double-Ended Cordset - M to F - 5M (blue)
DM-DB1-DF-06.0	Mid Double-Ended Cordset - M to F - 6M (blue)
DM-DB1-DF-08.0	Mid Double-Ended Cordset - M to F - 8M (blue)
DM-DB1-DF-10.0	Mid Double-Ended Cordset - M to F - 10M (blue)