

## NMEA2000® 4-20mA Pressure Adaptor



- Convert 4 - 20mA pressure input to digital value with  $\pm 2\%$  FSD accuracy
- User selectable pressure range
- User selectable pressure source
- User selectable Damping
- Faulty sensor/connection detection (under or over current)
- No complicated menu setups required
- NMEA2000® micro C interface plug
- Designed to NMEA2000® network standard

The Oceanic Systems' NMEA2000® 4601 4 - 20mA Pressure Adaptor is designed to monitor any 4 - 20mA pressure source including Atmospheric, Water, Steam, Compressed Air, Hydraulic, Oil & Fuel on the NMEA2000® network.

This unit is designed to operate in a protected marine environment such as an engine room. It provides a standard NMEA2000® pressure PGN130314 over the network and is an important part of our complete Monitoring and Digital Switching System designed to NMEA2000® standard.


It is fully waterproof to IP67 and ruggedly constructed for years of reliable and accurate service.

The unit comes with a detailed User Manual and is engineered to the NMEA2000® network standard.

# NMEA2000® 4-20mA Pressure Adaptor

## Part No. 4601

### Dimensions

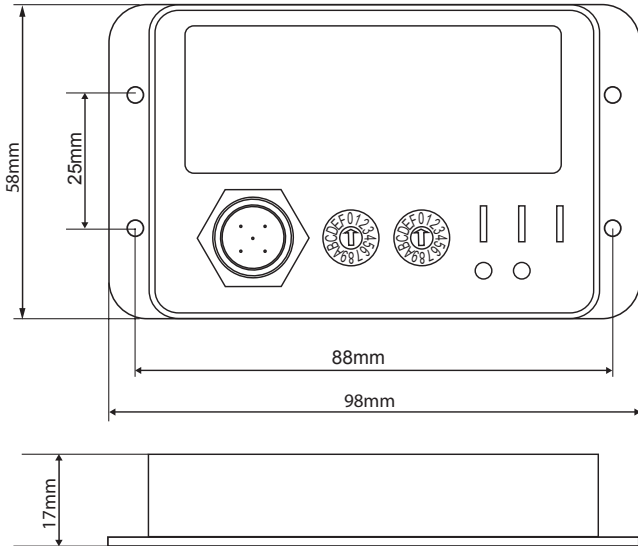

### Pressure sensor



Pressure sensors	
4645	Pressure snubber for 1/4" G connection
4636	Pressure sensor 0-350bar(5000psi) 4-20mA 1/4" G connection
4635	Pressure sensor 0-200bar(3000psi) 4-20mA 1/4" G connection
4634	Pressure sensor 0-70bar(1000psi) 4-20mA 1/4" G connection
4633	Pressure sensor 0-35bar(500psi) 4-20mA 1/4" G connection
4632	Pressure sensor 0-7bar(100psi) 4-20mA 1/4" G connection
4631	Pressure sensor 0-3.5bar(50psi) 4-20mA 1/4" G connection
4625	Pressure sensor 0-1bar(15psi) 4-20mA 1/4" G connection
4625	Pressure snubber
4621	Pressure Sensor 0-1bar ABS, 4-20mA, 1/4" BSP
4620	Vacuum Sensor 0-1bar, 4-20mA, 1/8" NPT

Design Standard		
NMEA2000®	Level B	
NMEA2000® PGNs		
Monitor	PGN130314	Actual pressure
Protocol	PGN126464	Tx/Rx PGN List
	PGN126996	Product Information
	PGN059392	ISO Acknowledge
	PGN059904	ISO Request
	PGN060928	ISO Address Claim
	PGN126208	Command/Request Group
Electrical and Mechanical		
Operating Voltage	12 to 24 Volts	
Power Consumption	65mA average Operating	
Load Equivalence Number	2	
Reverse Battery Protection	Indefinitely	
Load Dump Protection	Yes to SAE J1113	
Size	98 x 58 x 17 mm	
Weight	140v grams	
Environmental		
IEC06954 Classification	Value	
IEC 60954 Classification	Protected	
Degree of protection	IP67	
Operating Temperature	-20C to 55C	
Storage Temperature	-40C to 70C	
Relative Humidity	93%RH @ 40C per IEC 60945-8.2	
Vibration	2-13.2Hz @ ±1mm, 13.2-100Hz @ 7m/s2 per IEC 60945-8.7	
Electromagnetic Emission	Conducted and Radiated Emission per IEC 60945-9	
Electromagnetic Immunity	Conducted/Radiated per IEC 60945-10	
Safety Precautions	Dangerous Voltage, Electromagnetic Radio Frequency per IEC 60945-12	

Oceanic Systems (UK) Ltd  
Unit 10-11 Milton Business Centre, Wick Drive,  
New Milton, Hampshire, BH25 6RH, United Kingdom

Tel: +44(0)1425 610022 Fax: +44(0)1425 614794  
Email: sales@osukl.com Web: www.osukl.com

Copyright © 2016 Oceanic Systems (UK) Ltd. All rights reserved. Our policy is one of continuous product improvement so product specifications are subject to change without notice. Oceanic Systems products are designed to be accurate and reliable. However, they should be used only as aids to vessel monitoring, and not as a replacement for traditional navigation and vessel monitoring techniques.

NMEA2000® is a registered trademark of the National Marine Electronics Association.