

NMEA2000® 16 Channel Switch Input Module



- Protected against ESD, Voltage Surges and Transients to IEC61000 4-2,4 and 5
- Up to 16 isolated input channels
- PLC quality inputs compatible with standard IEC61131-2 Type 1 and Type 3 Inputs
- Indicator LEDs for each active Inputs
- Switch settable Device Instance
- Boat Builder Preferred WAGO Cage Clamp Terminals
- Compatible with 12 or 24 Volt Systems
- Low Cost
- Manufactured to NMEA2000®

The Oceanic Systems' 4410 16 Channel Switch Input Module monitors switch closure devices and reports their status over the NMEA2000® network.

These devices can include fire/smoke/carbon monoxide detectors, bilge and flood float detectors, doorway and porthole closure detectors, valve status detectors and many more. With this module and suitable NMEA2000® displays the status of all: these items can be viewed anywhere on the vessel.

The unit has PLC quality inputs that are manufactured to IEC 61131 and IEC61000 standards so they are optically isolated and fully protected against ESD, Voltage Surges and Transients to ensure the most reliable operation at all times.

It is compatible with either 12 or 24 Volt systems. It requires NO user setup menus but the simple setting of two small rotary address switches so multiple Switch Input Modules can exist on the same network.

The connections to the unit are made via boat builder preferred WAGO Cage Clamp terminal blocks which allow either solid or multi-stranded wires from 0.08 to 1.5mm² to be connected quickly and securely. Each switch input also has a tell tale green LED to indicate when it is active.


The 4410 can be either panel mounted or din rail mounted using the mounting clips provided.

The unit comes with a detailed User Manual and is manufactured to work with NMEA2000®.

The 4410 16 Channel Switch Input Module is an important part of our NMEA2000® based Vessel Monitoring and Control System.

NMEA2000® 16 Channel Switch Input Module

Part No. 4410

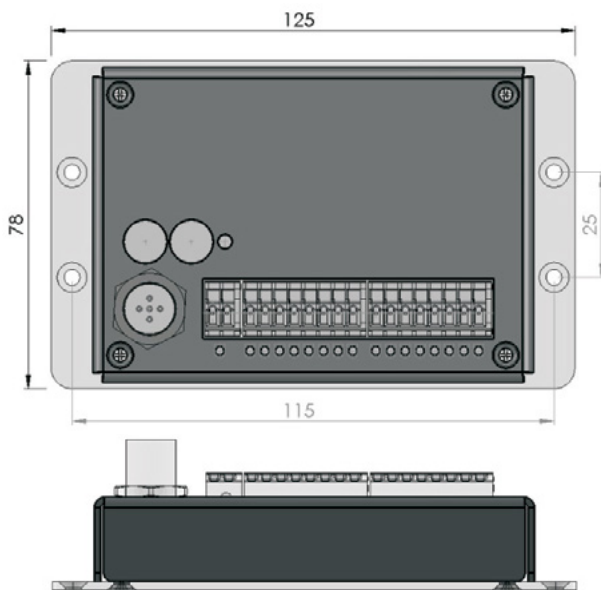

Typically used to monitor

- Fire Detectors
- Smoke Detectors
- Carbon Monoxide Detectors
- Bilge and Flood Level Float Switches
- Doorway, Porthole and Hatch Switches
- PIR Motion Detectors
- Valve Status Switches
- Coolant Flow Switches
- OverTemp Alarm Switches
- Water in Fuel Switches

| Outputs | | |
|---|---|-----------------------|
| Switch Inputs | 16 Optically Isolated Inputs | |
| Input Voltages | 12 or 24 Volts | |
| Wire Sizes | Solid or Multi-stranded 0.08 - 1.5mm ² | |
| Design Standard | | |
| NMEA2000 | Level B | |
| Maritime Nav & RadioComm | IEC60945, IEC61000-4-2,4 and 5 | |
| CE & FCC | Electromagnetic Compatibility | |
| NMEA2000 Parameter Group Numbers (PGNs) | | |
| Type | PGN No. | PGN Name |
| Monitor | PGN127501 | Switch Bank Status |
| Protocol | PGN126464 | Tx/Rx PGN List |
| | PGN126996 | Product Information |
| | PGN059392 | ISO Acknowledge |
| | PGN059904 | ISO Request |
| | PGN060928 | ISO Address Claim |
| | PGN126208 | Command/Request Group |
| Electrical and Mechanical | | |
| Operating Voltage | 9 to 32 Volts | |
| Power Consumption | 36mA at 12 Volts | |
| Load Equivalence Number | 1 | |
| Reverse Battery Protection | Indefinitely | |
| Load Dump Protection | Yes to SAE J1113 | |
| Size | 125 x 78 x 38mm | |
| Weight | 180 gm | |
| Environmental | | |
| IEC06954 Classification | Protected | |
| Degree of protection | IP 40 | |
| Operating Temperature | -25C to 50C | |
| Storage Temperature | -40C to 70C | |
| Relative Humidity | 93%RH @ 40C per IEC 60945-8.2 | |
| Electromagnetic Emission | Conduct/Radiated per IEC 60945-9 | |
| Electromagnetic Immunity | Conducted/Radiated per IEC 60945-10, 61000. | |

Oceanic Systems (UK) Ltd
Unit 10-11 Milton Business Centre, Wick Drive,
New Milton, Hampshire, BH25 6RH, United Kingdom

Tel: +44(0)1425 610022 Fax: +44(0)1425 614794
Email: sales@osukl.com Web: www.osukl.com

Copyright © 2016 Oceanic Systems (UK) Ltd. All rights reserved. Our policy is one of continuous product improvement so product specifications are subject to change without notice. Oceanic Systems products are designed to be accurate and reliable. However, they should be used only as aids to vessel monitoring, and not as a replacement for traditional navigation and vessel monitoring techniques.

NMEA2000® is a registered trademark of the National Marine Electronics Association.