

# Submersible Impeller Range

Whale's high flow long life submersible impeller galley pumps

Simple plumbing suitable for 10mm (3/8") or 13mm (1/2") flexible hose

Watertight electrics sonic welded cable connection

Simple and compact design

**Standard Pump 10 LPM**

- Simple, compact and an economical solution
- Ideal for basic, one outlet application

**Premium Pump 13 LPM**

- Reliable, general purpose and suitable for multiple outlets
- Long life, very quiet with low power consumption
- An inexpensive way to update a manual to an electric system

**High Flow Pump 14 LPM**


- Market leading submersible pump for flow performance suitable for showering

Robust ABS pump housing

Narrow design ideal to drop into your water tank

Protected strainer prevents debris entering pump

Product code: see table

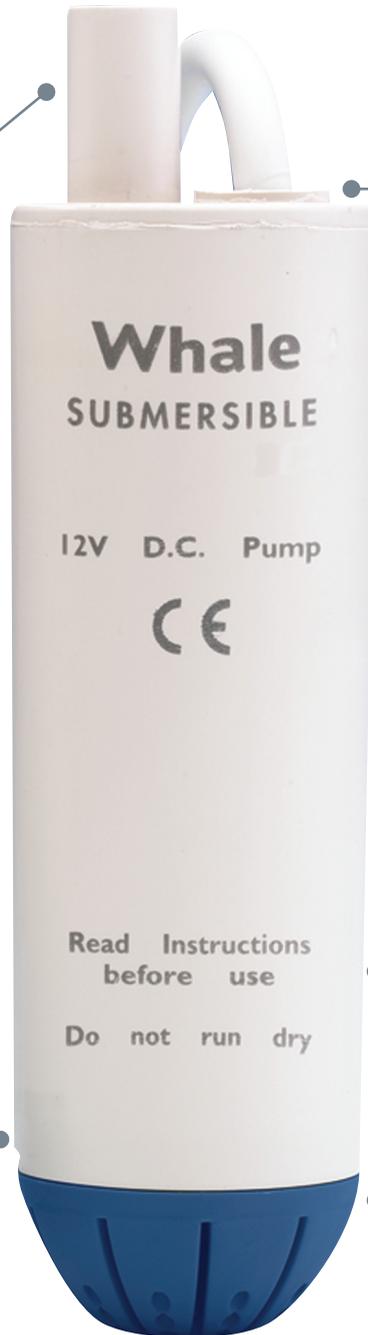

# Features and Benefits

- Simple, compact economical solution
- Long life, very quiet with low power consumption
- An inexpensive way to update a manual to an electric system
- Choose the pump to suit your freshwater needs on board from 3 flow options
- 12 V d.c. / 24 V d.c. models available
- Compact, quiet, lightweight design suitable for use with pressure switch and microswitch systems
- Also suitable for pumping diesel

## 1 Year Warranty

### Awards and Accreditations

- EMC compliant
- CE marked

## COMPLETE YOUR SYSTEM

Freshwater system accessories such as water filters, and pipework connections – page 76-77

## YOU MAY ALSO LIKE

- Whale water filters
- Fresh IC freshwater power shower pump with intelligent control built in
- Universal Pressure Pumps
- Whale Quick Connect plumbing - Pipework and fittings

## **i** Product Information

### Model Specifications

| Model                                | Standard   |               | Premium       |                  |               | High Flow        |               |
|--------------------------------------|--|---------------|---------------|------------------|---------------|------------------|---------------|
|                                      | 12V d.c.   | 12V d.c.      | 12V d.c.      | 24V d.c.         | 24V d.c.      | 12V d.c.         | 12V d.c.      |
| Pump                                 | Sub  | Sub           | Inline        | Sub              | Inline        | Sub              | Inline        |
| Submersible Pump Old Code            | GP1002   | GP8815        | GP9955        | GP8825           | GP9965        | GP9216           | GP9255        |
| <b>Submersible Pump New Code</b>     | <b>GP1002</b>  | <b>GP1352</b> | <b>GP1392</b> | <b>GP1354</b>    | <b>GP1394</b> | <b>GP1652</b>    | <b>GP1692</b> |
| Fuse Size                            | 5 amp automotive   |               |               | 3 amp automotive |               | 5 amp automotive |               |
| Weight                               | 0.15kg ( 0.3 lbs)  |               |               |                  |               |                  |               |
| Hose Connections                     | Suitable for 10 mm (3/8") or 13 mm (1/2") Flexible Hose  |               |               |                  |               |                  |               |
| Connection to Quick Connect Plumbing | Use WX1511B (Stem Adaptor 11 mm-15 mm)<br>Connect WX1504 (15 mm Equal Straight) see page 84-87 |               |               |                  |               |                  |               |
| Materials in contact with liquid     | Pump Body: ABS, Seals: Nitrile®, Strainer: Polypropylene, Impeller: PBT, Cable: PVC            |               |               |                  |               |                  |               |

Note: Each pump performance will depend on the plumbing system and restrictions on outlets in your boat.  
Note: New Model codes are direct replacement for pre 2006 model part numbers.

### Performance Data


| Discharge Head | Flow Rate Per Minute / Current Draw |                        |                        |                      |
|----------------|-------------------------------------|------------------------|------------------------|----------------------|
|                | Standard 12V d.c                    | 12 V d.c Premium       | 24V d.c                | High Flow 12V d.c    |
| 0 m (0 ft)     | 10.3 ltrs<br>2.4 amps               | 13.2 ltrs<br>3.6 amps  | 13.2 ltrs<br>1.8 amps  | 15.8 lts<br>3.8 amp  |
| 1 m (3 ft)     | 8.75 ltrs<br>2.2 amps               | 11.75 ltrs<br>3.3 amps | 11.75 ltrs<br>1.6 amps | 14.8 lts<br>3.7 amps |
| 3 m (9 ft)     | 5.75 ltrs<br>2.0 amps               | 9.75 ltrs<br>2.9 amps  | 9.75 ltrs<br>1.45 amps | 12.8 lts<br>3.5 amps |

Note: Each pump performance will depend on the plumbing system and restrictions on outlets in your boat.

### Dimensions Table

|                          | A                | B                   | C                  | D                   |
|--------------------------|------------------|---------------------|--------------------|---------------------|
| <b>Standard</b>          | 20 mm<br>(3/16") | 88 mm<br>(3 3/16")  | 36 mm<br>(1 3/16") | 108 mm<br>(4 1/4")  |
| <b>Premium/High Flow</b> | 20 mm<br>(3/16") | 109 mm<br>(4 3/16") | 36 mm<br>(1 3/16") | 129 mm<br>(5 1/16") |

Note: These specifications are retail items only.  
For details of our bulk pack range for boat builders and wholesalers - contact Whale Support.

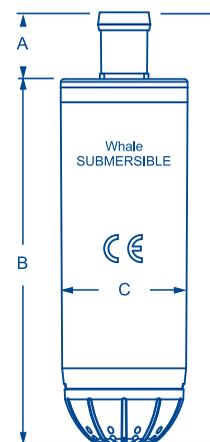

#### WARNING

Note: Not suitable for petrol, low flash point liquids and aggressive chemicals.  
This pump must not be used for pumping petrol or any highly inflammable or corrosive liquids.

**MUNSTER SIMMS ENGINEERING LIMITED AND WHALE WATER SYSTEMS INC**

(a subsidiary of Munster Simms Engineering Limited) ("Company")

**STATEMENT OF LIMITED WARRANTY**

The products manufactured and supplied by the Company ("Products"), are warranted to be free from material defects in design, workmanship and material under normal use ("Defects") for (unless otherwise extended in advance in writing by the Company) a period of 12 months from date of purchase, save that this warranty shall not apply where the Defect is attributable to defective materials supplied by third parties. In such event, the only remedy of the buyer of the Products ("Buyer") will be against that third party. This warranty applies only to Products that are properly installed and used in accordance with all oral and written maintenance and operation instructions provided by the Company. The Company shall not be liable for a breach of any of the warranties in this Statement of Limited Warranty if the Buyer makes any further use of the Products after giving the Company notice of any Defect or the Buyer alters or repairs such Products without the written consent of the Company. Products that have been disassembled or modified (without prior written approval of the Company), are not covered by this warranty.

All Products are covered by a 1 year limited warranty (detailed below) from (unless otherwise extended in advance in writing by the Company) date of purchase ("Standard Warranty"). In addition to the Standard Warranty, some individual Products are covered by a further warranty, as detailed in Table 1 below

("Additional Warranty").

In the event that any of the warranties offered by the Company are breached, the Company shall (at its discretion) repair, replace or issue a spares kit for the defective Product subject to prior examination at Company premises. If the Company complies with this paragraph, it shall have no further liability for a breach of the warranties in respect of such Products. Adjustment or replacement of defective parts made under this warranty will not extend the warranty period applicable either under the Standard Warranty and/or the Additional Warranty. The Company shall not bear any costs of removal, installation, transportation, or other charges that may arise in connection with a warranty claim by the Buyer. Such costs shall be the Buyer's sole responsibility. No claim in respect of defective Products will be valid unless the alleged defective Products are returned at the Buyer's expense to the Company for inspection, together with proof of purchase. Non-stock/ special order items are non-returnable by the Buyer in any circumstances, and this warranty does not apply to prototype models.

**EXCLUSIONS:**

The Company shall not be liable for any indirect loss or for any special, incidental, punitive or consequential damages suffered by the Buyer and/or any third party, whether this loss arises from breach of a duty in contract or tort or breach of a statutory duty or in any other way, including, without limitation, loss arising from the negligence, default, breach of duty, non-delivery, delay in delivery or defects or errors in the work undertaken by the Company pursuant to the terms of this Statement of Limited Warranty or in connection with any other claim arising in connection with manufacture and/or supply of the Products. In particular, the Company shall not be liable (without limitation) for:

- Loss of profits, increased production costs or other economic injury or loss;
- Loss of contracts or opportunity; and/or
- (insofar as is permitted by applicable law) damage to property of the Buyer or any third party.

The Company shall under no circumstances be liable for any breach of its obligations hereunder and/or under any contract governing sale and purchase of the Products ("Contract") resulting from causes beyond its control including but not limited to fires, strikes, lockouts, insurrection or riots, terrorism or civil disorder, embargoes, wrecks or delays in transportation, requirements or regulations of any governmental authority, tempest, earthquake or other natural disaster, flood, bursting or overflowing of water tanks, failure or shortage of power, fuel or other utilities, or loss of data and/or communications due to causes such as those referred to in this paragraph.

Copyright Whale 2011 - All rights reserved. Whale is. A registered trademark of Munster Simms Engineering Limited, Bangor Northern Ireland trading as Whale. Whale's policy is one of continuous improvement and we reserve the right to change specifications without prior notice. Illustrations are for guidance purposes only.

Please note that by contacting Whale Support you will be indicating your consent to receiving product updates, recall information, help guides and appropriate marketing messages from us via post, email or telephone unless you indicated an objection to receiving such messages.

Santoprene® is a registered trade name of Advanced Elastomer Systems, LP, an Exxonmobil Chemical Affiliate Delrin®, Teflon® and Neoprene are registered trade names of Dupont Neumeurs and Co. Monprene® is a registered trade name of Technore Apex

Powerboat photography courtesy of Fairline Boats PLC and Riviera Yachts.

This statement sets out the Company's entire liability in respect of the Products and the Company's liability under this statement shall be in lieu of all other warranties, conditions, terms and liabilities, express or implied, statutory or otherwise howsoever except any implied by law which cannot be excluded. All warranties, conditions and other terms implied by statute or common law (save for the conditions implied by section 12 of the Sale of Goods Act 1979) are, to the fullest extent permitted by law, excluded from the Contract.

Subject to the remaining provisions of this Statement of Limited Warranty, the Company's total liability in contract, tort (including negligence or breach of statutory duty), misrepresentation, restitution or otherwise, arising in connection with the performance or contemplated performance of the Contract and supply of the Products shall be limited to the Contract price.

Nothing in this Statement of Limited Warranty shall operate so as to exclude or restrict the Company's liability for death or personal injury caused by its negligence. The Company shall NOT be liable for any condition, warranty or representation made by a distributor or other person acting on behalf of the Company unless expressly confirmed by the Company in writing. This Statement of Limited Warranty shall be governed and construed in accordance with Northern Irish law and all disputes arising in connection hereto shall be submitted to the exclusive jurisdiction of the Northern Irish Courts.

Table 1:

| Product type                    | 2 years | 3 years | 5 years | 10 years |
|---------------------------------|---------|---------|---------|----------|
| Universal Series Pump           | ✓       |         |         |          |
| Chromed metal taps (TT)         | ✓       |         |         |          |
| Smartbail Bilge Pump            |         | ✓       |         |          |
| Orca Bilge Pump                 |         | ✓       |         |          |
| Supersub Bilge Pump             |         | ✓       |         |          |
| Water Heater                    |         | ✓       |         |          |
| Manual Bilge Pump               |         |         | ✓       |          |
| Manual Freshwater Pump          |         |         | ✓       |          |
| Manual Toilet Pump              |         |         | ✓       |          |
| Quick Connect Plumbing fittings |         |         |         | ✓        |
| WhaleX tubing                   |         |         |         | ✓        |

The period of such Additional Warranty shall commence automatically the date the Standard Warranty expires.

Note that these periods may be further enhanced through special offers, or revisions. Please see your product documentation for details.

\* Applies to BE: 0500, 0950, 1450 & 1454 only. All other Orca variants have a 1 year warranty. The period of such Additional Warranty shall commence automatically the date the Standard Warranty expires. Note that these periods may be further enhanced through special offers, or revisions. Please see your product documentation for details.

**DISCLAIMER**

All Products are rated and appropriate for use with water unless otherwise specified by the Company. Compatibility and suitability for other liquids should be verified in writing by the Company prior to such use. All specification information on Products included in Product literature is based on tests using clean cold water unless otherwise specified. Any performance / specification figures shown have been calculated using standard testing procedures. Where maximum output is stated, such maximum output refers to pumps acting at zero lift and zero head. Actual performance may vary depending on the application, installation and environmental factors. Neither the accuracy nor completeness of the information contained in any Product brochure is guaranteed by the Company and may be subject to change at its sole discretion. The Company may, at its sole discretion, change the technical performance, dimensions or appearance of any of its Products without prior notification to purchasers. The Company shall not be liable to a purchaser for any indirect or consequential loss or damage (whether for loss of profit, loss of business, depletion of goodwill or otherwise), costs, expenses or other claims for consequential compensation whatsoever (howsoever caused) which arise out of or in connection with the use of a Product. Where dimensions are stated, such dimensions are for guidance only. Inch measurements are conversions from millimetre dimensions and are shown to the nearest 1/16". US gallons volumes are conversions from litres and are also shown for guidance purposes only to the nearest 1/16. Please contact the Company directly if precise measurements are required.