



AirForce™ PFD (MA3032) Leg Strap Assembly Attachment Instructions

3870 Mustang Way
Bellingham, WA
USA 98226

TOLL FREE 1.800.526.0532
EMAIL mustangusa@mustangsurvival.com
WEB www.mustangsurvival.com



The properly attached AirForce™ leg strap assembly keeps the inflated cell in place while in the water. Complete these instructions to ensure proper assembly for safe use.

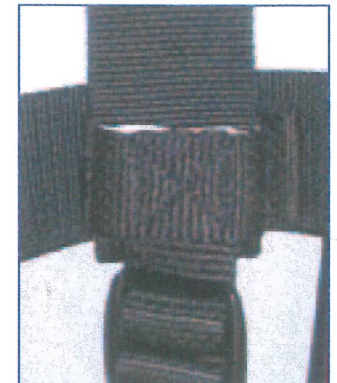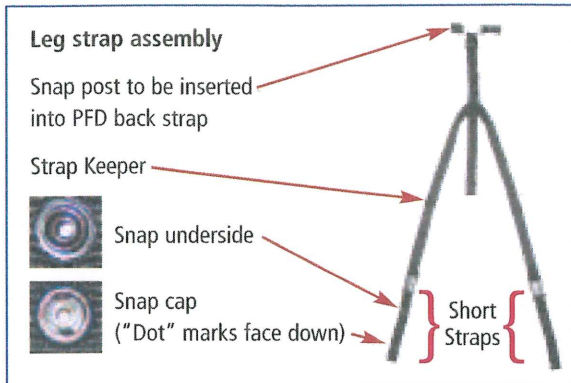

Step 1
Ensure the short straps are fastened to the bottom ends of the leg strap assembly. **NOTE: If the snap orientation is not correct, the assembly will not perform correctly.**


Step 2
A) Lay the AirForce™ PFD face down. Place the snap post through the loop at the bottom of the AirForce™ PFD back strap.

B) The "Pull-The-Dot" snap is a heavy-duty, three-sided locking snap fastener. Look for the dot on the cap's surface. Push down on the opposite side of the dot, then firmly on the "Dot" until the snap fastens securely.

C) Rotate the loop so that the snap and loose end of the webbing are hidden behind the AirForce™ PFD back strap loop.




Step 3
Don the AirForce™ PFD, and adjust the back buckle until the Y point is located at tailbone using the buckle at the top of the leg strap assembly. Pull the left side of the leg assembly through your legs up to the waist belt (each strap may require adjustment).

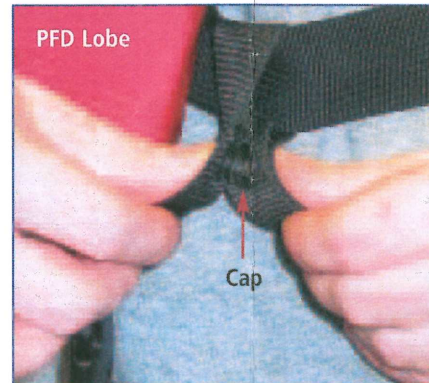

Step 4
Pull the loose end of the left side strap up and over the PFD waistbelt with the **snap's cap on the inside**. Fasten to the left of the PFD lobe.

Note: the snap underside is facing out.

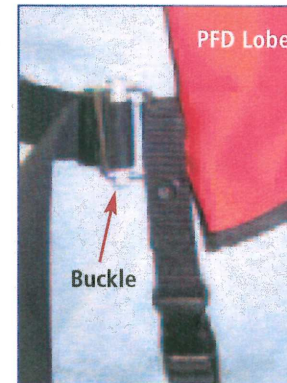

Step 5
Repeat Step 4 for the right side, ensuring the strap is between the metal adjustment buckle and PFD lobe.



Step 6
Ensure the straps sit flat, not twisted. Adjust the buckles to achieve a snug fit.

Step 7
Slide the strap keepers down to prevent snagging.

To remove the leg strap assembly, pull on the side where the "Pull-The-DOT" appears, releasing the fastener instantly.