


**Compression Stud (how to install these fittings)**

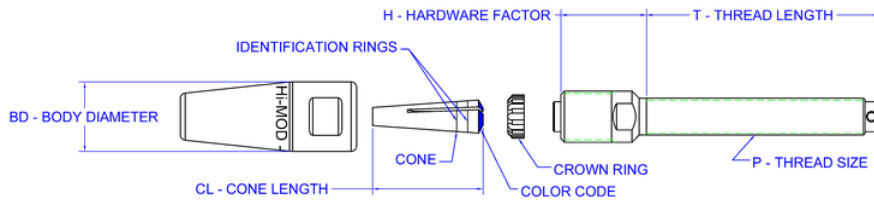

**Strand Configuration Part #**

1x19	7x7 or 7x19	Wire Ø	P-Thread	H-Hardware Factor	T-Thd Length	Weight lbs.
14CTS18	14CTS18-7	1/8"	1/4-28	5/8"	2"	0.05
14CTS532	14CTS532-7	5/32"	1/4-28	11/16"	2"	0.07
516CTS532	516CTS532-7	5/32"	5/16-24	7/8"	2-1/4"	0.09
516CTS316	516CTS316-7	3/16"	5/16-24	1"	2-1/4"	0.14
38CTS316	38CTS316-7	3/16"	3/8-24	7/8"	2-5/8"	0.17
38CTS732	38CTS732-7	7/32"	3/8-24	7/8"	2-5/8"	0.17
716CTS732	716CTS732-7	7/32"	7/16-20	1"	2-7/8"	0.20
38CTS14	38CTS14-7	1/4"	3/8-24	1-1/8"	2-5/8"	0.24
716CTS14	716CTS14-7	1/4"	7/16-20	1-1/8"	2-7/8"	0.28
12CTS14	12CTS14-7	1/4"	1/2-20	1-1/16"	3-1/2"	0.35
12CTS932	12CTS932-7	9/32"	1/2-20	1-1/8"	3-1/2"	0.43
12CTS516	12CTS516-7	5/16"	1/2-20"	1-1/2"	3-1/2"	0.62
58CTS516	58CTS516-7	5/16"	5/8-18	1-1/2"	3-3/4"	0.75
58CTS38	58CTS38-7	3/8"	5/8-18	1-3/8"	3-7/8"	1.02
34CTS38	34CTS38-7	3/8"	3/4-16	1-1/2"	4-5/8"	1.24
34CTS716	34CTS716-7	7/16"	3/4-16	1-1/2"	4-5/8"	1.22
34CTS12	34CTS12-7	1/2"	3/4-16	2"	4-5/8"	1.95
78CTS12	78CTS12-7	1/2"	7/8-14	2"	5-1/2"	2.85
78CTS916	78CTS916-7	9/16"	7/8-14	2-1/8"	5-1/2"	2.87
1CTS58	1CTS58-7	5/8"	1.0-12	2-3/4"	6-1/4"	4.35
118CTS34	118CTS34-7	3/4"	1 1/8-12	2-1/2"	7-3/4"	5.27
114CTS78	114CTS78-7	7/8"	1 1/4-12	2-7/8"	7-3/4"	7.36
138CTS1	138CTS1-7	1"	1 3/8-12	3-5/8"	8-1/2"	14.5